

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







High Frequency Ceramic Solutions

2.45 GHz, Matched Balun-Filter for CSR BC Series ChipsetP/N 2450FB15K0005 Detail Specification: 12/23/2010 Page 1 of 2


General Specifications

Part Number	2450FB15K0005
Frequency (MHz)	2400~2500
Unbalanced Impedance	50 Ω
Differential Balanced Imp.	Conjugate match to CSR BC series Chipsets
Insertion Loss	3.5 dB max.
Return Loss	9.5 dB min.
Phase Difference	180° ± 10
Amplitude Difference	1.5 dB

	48 min.@ 880~960MHz	
Attenuation (dB)	30 min.@1710~1880 MHz	
	30 min.@1880~1990MHz	
	25 min.@4800~5000MHz	
	25 min.@7200~7500MHz	
Operating Temperature		-40 to +85°C
Storage Temperature		+5 to +35°C, Hum. 45 to 75%RH, 12 mos. Max
Power Capacity		1 Watt max.
Reel Quantity		4000

Mechanical Dimensions

	In	mm
L	0.079 ± 0.008	2.00 ± 0.20
W	0.049 ± 0.008	1.25 ± 0.20
Т	0.028 ± 0.004	0.70 ± 0.10
а	0.012 ± 0.004	0.30 ± 0.10
b	0.008 ± 0.004	0.20 ± 0.10
С	0.012 +.004/008	0.30 +0.1/-0.2
g	0.014 ± 0.004	0.35 ± 0.10
р	0.026 ± 0.002	0.65 ± 0.05




Terminal Configuration


No.	Function	
1	Unbalanced Port	
2	NC or DC Feed**	
3	NC	
4	GND	
5	Balanced Port	
6	GND	
7	Balanced Port	
8	GND	
[3 2 1	


Mounting Considerations

* Line width should be designed to match 50 Ω characteristic impedance, depending on PCB material and thickness.

** A 10pF by-pass capacitor to GND (or RF GND) should be connected when using DC-Feed feature

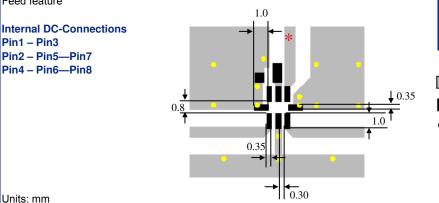





Johanson Technology, Inc. reserves the right to make design changes without notice. All sales are subject to Johanson Technology, Inc. terms and conditions.




High Frequency Ceramic Solutions

2.45 GHz, Matched Balun-Filter for CSR BC Series Chipset

P/N 2450FB15K0005

Detail Specification: 12/23/2010

Page 2 of 2

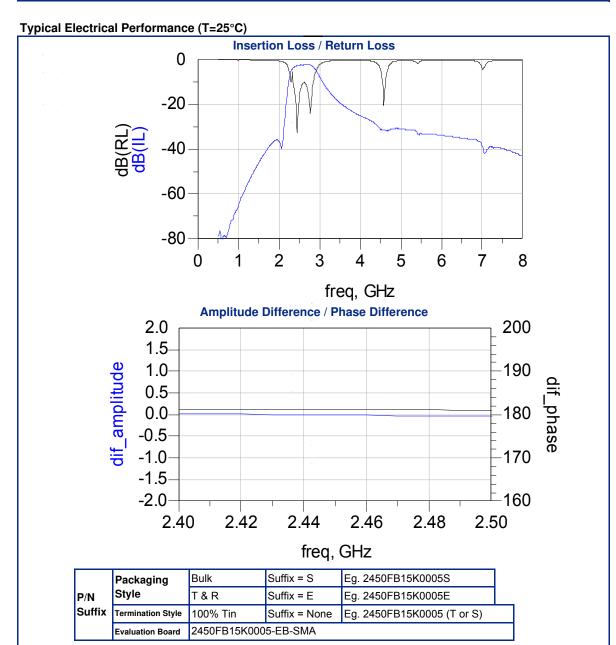

Johanson Technology, Inc. reserves the right to make design changes without notice. All sales are subject to Johanson Technology, Inc. terms and conditions.

