



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



EL WIRE/TAPE/PANEL / EL TAPE

White Electroluminescent (EL) Tape Strip – 100cm w/two connectors

PRODUCT ID: 416

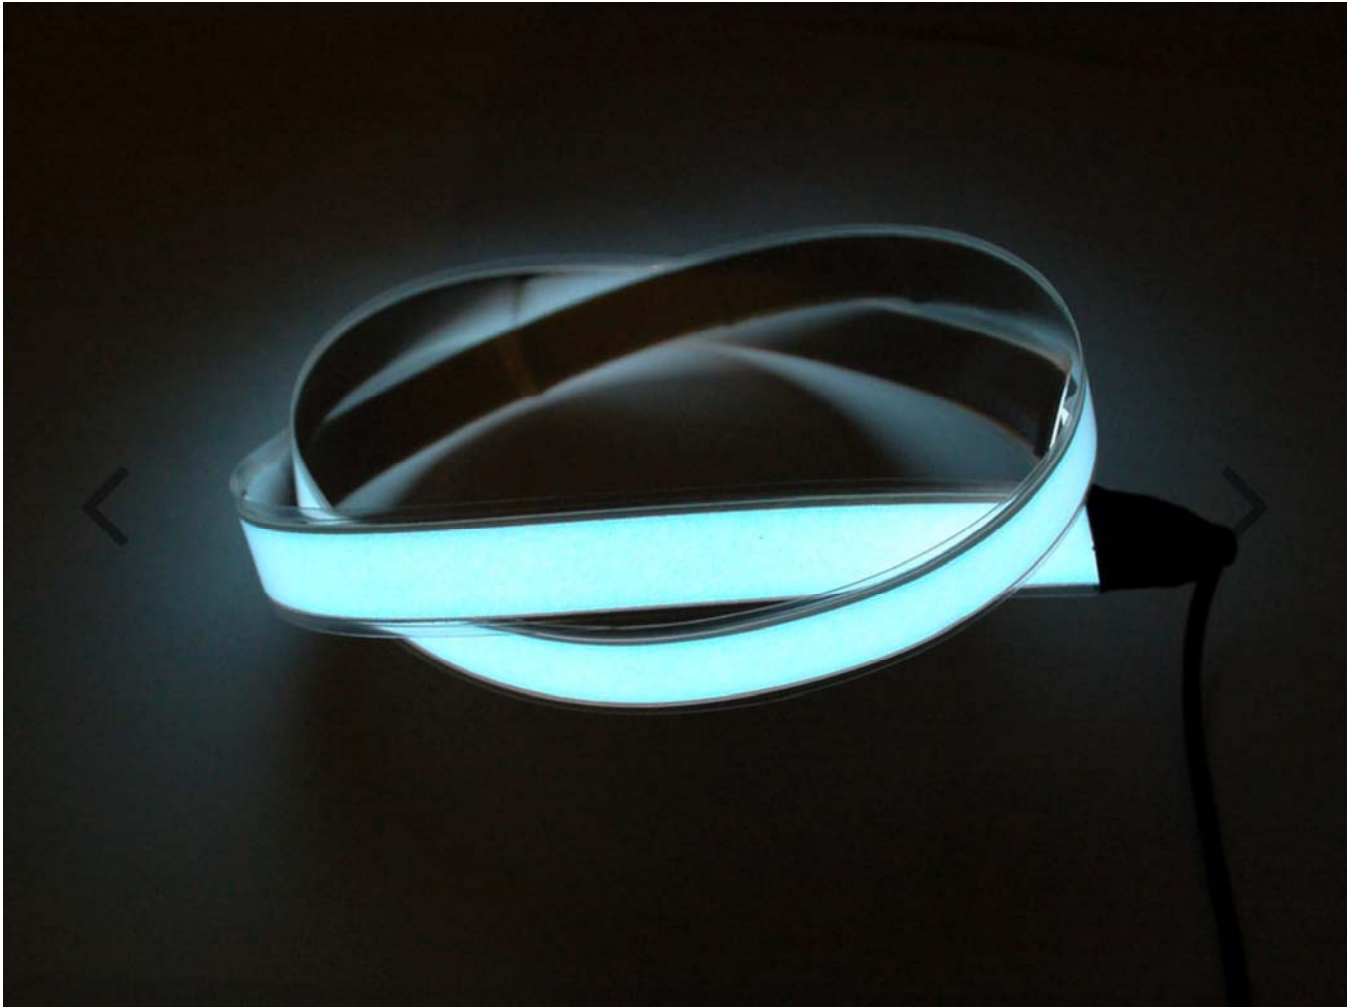

DESCRIPTION

EL tape is the big sister to EL wire – it has the same glow effect but with a flat, wide shape instead of a round shape. The glowing part of the tape is 1 cm wide (the plastic coating is about 1.5cm wide). The other side has an adhesive on it so you can stick the tape onto something. Its covered in what seems to be PVC, the tape is thus weather-proof – but note that the connectors are NOT waterproof, just a bit of heatshrink. This isn't something we would suggest leaving outdoors for extended periods.

Because EL tape has more surface area than wire, it requires a more powerful inverter for the same length. This tape is about 4 times more capacitive (per length) than our high-brightness EL wire and 8 times more capacitive than 'standard' EL wire. For that reason, we are shipping the EL tape in 100cm lengths with two EL connectors soldered on, one on each end. You can cut it into two pieces of any length and use both halves!

Note that the maximum amount for the 2xAA pocket inverter we carry is 60cm so don't try to run the full strip off of one inverter – it will look dim and isn't nice to the inverter – cut it in half first! Plug it in and it will light up nicely! A 50cm strip draws about 200mA from the 2xAA batteries in the pocket inverter (so 2000mAh batteries will last ~10 hours if on 'constant' mode). You can also use our 4xAAA inverter which is strong enough to power a full meter at once – plug in only one end of the tape to the inverter or cut it in half and plug both halves in.

Please note! EL tape, EL wire and EL panel are made with different processes and so the color and brightness will not be consistent between the two: white tape, white wire and white panels will not necessarily match!

Technical Details



Size: 100 cm x 1.5 cm about 1mm thick, the glowing part is 1cm wide

Panel lifetime: >25000 hours

Operating voltage: 60–250VAC

Operating Frequency: 50–5000HZ

Current Draw: 0.14mA/cm² (max) @ 110V / 400Hz

Initial Brightness: 75 cd/m²

Operating Temperature: –50 C / 65 C

~10 nF per meter

[It is very difficult to reattach connectors to EL tape once its been cut, but here is a tutorial that shows how it can be done](#)