



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Preliminary Technical Data

GENERAL DESCRIPTION

The ADIS16060/PCB are simple evaluation boards that provide convenient access to the ADIS16060 family of products, using a standard 2 mm, 2 × 6, connector interface. These connectors can be accessed using a variety of cable options, including standard 1 mm ribbon cables. The ADIS16060/PCB is designed to be evaluated in an existing digital platform (such as MCU, DSP, FPGA, PLD) or as part of the ADISEVAL system. Four mounting holes (sized for 2-56 or 2 mm screws) have been provided to secure the board during evaluation. Note: The ADIS16060/PCBZ will not work with the ADISEVAL/USBZ at this time.

CIRCUIT DESCRIPTION

The schematic, layout, and parts list for the ADIS16060/PCB can be found in

The ADIS16060's digitized outputs can be accessed using the 4-wire serial port interface (SPI) signals on J1: SCLK, CS, DOUT, and DIN. For specific information on using the ADIS16060 SPI interface, refer to the ADIS16060 data sheet. Auxiliary functions, such as the 12-bit ADC input, can be accessed using J2. C1 provides additional power supply filtering but is generally not required.

Table 1. Parts List

Reference Designator	Part Description
U1	ADIS16060BCCZ ¹
J1, J2	12-pin, dual row, 2 mm connector
C1, C4	Power supply filtering, not installed
C2	Reference filtering, not installed
C3	Bandwidth limiting, 0.015µF (80Hz)

¹ x = 0, 1, 2, 3, 4 or 9, y = B or C

SPECIAL NOTES ON HANDLING

Note that the ADIS16060/PCB is not reverse-polarity protected. Reversing the power supply or applying inappropriate voltages (that is, voltages outside the Absolute Maximum Ratings in the ADIS16060 data sheet) to any pin may damage the ADIS16060/PCB.

Table 2. Power Supply Levels

Parameter	Range
V _{CC}	4.75 V to 5.25 V

Rev. PrA

Evaluation boards are only intended for device evaluation and not for production purposes. Evaluation boards as supplied "as is" and without warranties of any kind, express, implied, or statutory including, but not limited to, any implied warranty of merchantability or fitness for a particular purpose. No license is granted by implication or otherwise under any patents or other intellectual property by application or use of evaluation boards. Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Analog Devices reserves the right to change devices or specifications at any time without notice. Trademarks and registered trademarks are the property of their respective owners. Evaluation boards are not authorized to be used in life support devices or systems.

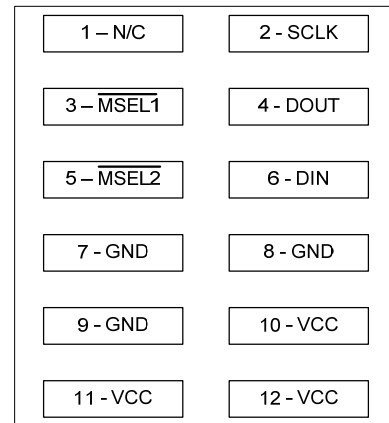


Figure 1. J1 Pin Assignments

NOTE: Pin 12 is not tied to pins 10 and 11, but is required for normal operation. Either connect them with a solder bridge or bring another wire to pin 12 from the power supply.

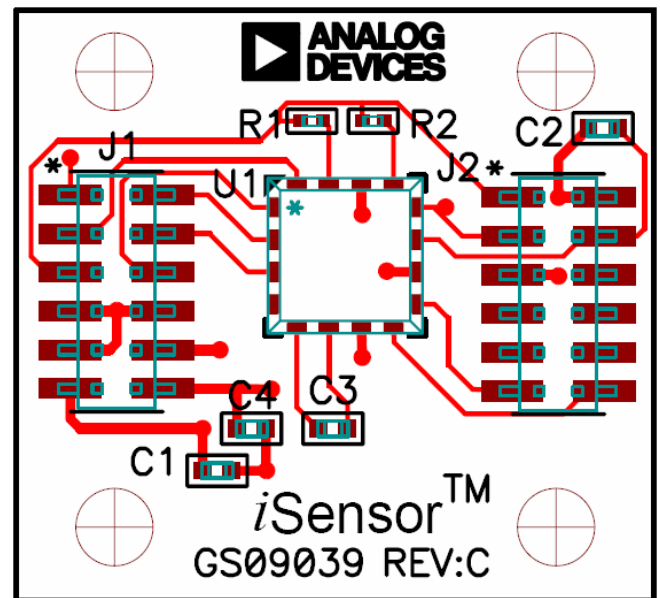


Figure 2. ADIS16060/PCB Layout (Top View)

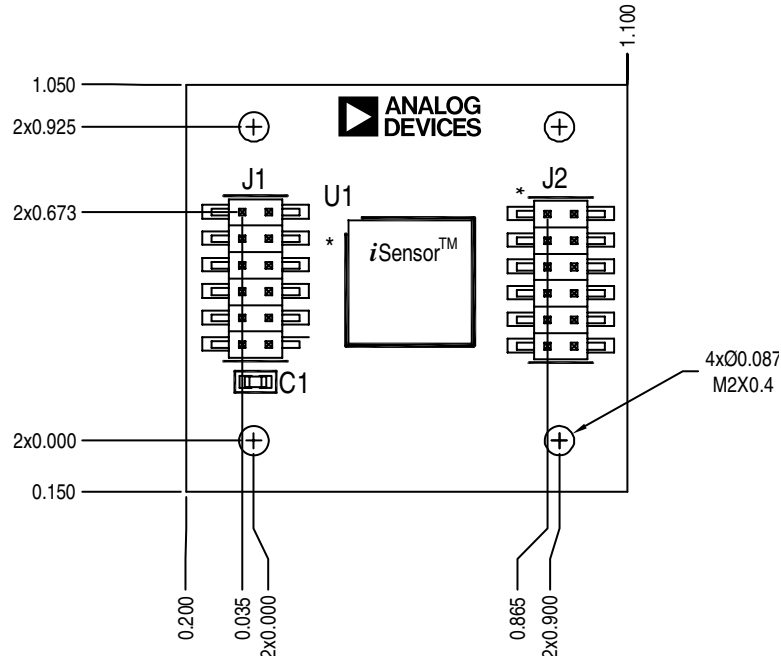


Figure 3. ADIS1620x/PCB Mechanical Drawing

ORDERING GUIDE

Model	Description
ADIS16060/PCBZ	Evaluation Board

¹ Z = RoHS Compliant Part.

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.