



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Phytion™		Device Programmers and Development Tools for Microcontrollers				
Home	Products	E-Shop	Support	Contact	News	Site Map

Quick Links

- [Help Desk](#)
- [Downloads](#)
- [All Programmers](#)
- [Device Search](#)
- [Tools Catalogs](#)

Shopping Cart

Items: 0

Total: \$0.00


[Your Account](#)

Products

- Development Tools
 - ARM
 - 8051
 - Other
- Device programmers
 - All Models
 - Universal
 - In-System
 - Gang
 - Adapters
- Custom made tools
- OEM tools

AE-B48-16NM1

DIP40/ BGA48 specialized adapter for FLASH memory.

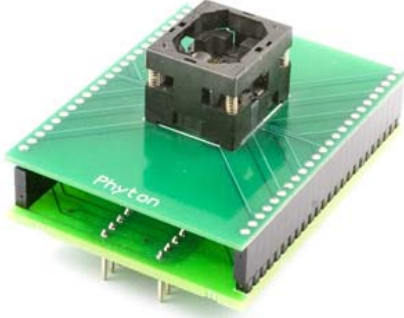

Description:

DIP40/BGA48 specialized adapter for FLASH memory. Device package dimensions: 6.39 x 6.37 x 1.0 mm, 0.75 mm pitch

Supported Devices:

Click the device programmer model below to get an appropriate list of the devices supported by this programmer with this adapter:

- [ChipProg-40](#)
- [ChipProg+](#)

[Adapter wiring diagram](#)

Adapter Connection Table:

DIP -40	Header	TSOP -48	74AHC573	C1, 150pF	C2, 0.1uF
1	Vddq	47			
2	A17	17			
3	A18	16			
4	G(OE)	28			
5	A20	10			
6	A7	18	4		
7	str		11	1	
8	W	11			
9	DQ10	34			
10	A5	20	7		
11	WP	14			
12	RP (RST)	12			
13	A1	24	3		
14	DQ0	29			
15	DQ12	39			
16	DQ6	42			
17	DQ7	44			
18	DQ14	43			
19	DQ9	32			
20	GND	27,46	1,10	2	1
21	DQ8	30			
22	DQ15	45			
23	A2	23	8		
24	A0	25	9		
25	DQ4	38			
26	DQ13	41			
27	DQ5	40			
28	A3	22	6		
29	Vpp	13			

	30	A19	15		
	31	DQ11	36		
	32	DQ1	31		
	33	A6	19	5	
	34	DQ2	33		
	35	A4	21	2	
	36	A16	48		
	37	DQ3	35		
	38	NC (A21)	9		
	39	E(CE)	26		
	40	Vdd	37	20	2
		A15	1	17	
		A14	2	16	
		A13	3	14	
		A12	4	19	
		A11	5	15	
		A10	6	13	
		A9	7	18	
		A8	8	12	

Copyright © 2007-2010 Phytion, Inc.

Phone: 718-259-3191 • E-mails: info@phyton.com, sales@phyton.com, support@phyton.com