



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# SMD 374.0MHz SAW FILTER

AFS374E

APPLICATION: WLAN



5 x 5 x 1.35mm

## STANDARD SPECIFICATIONS:

CHARACTERISTICS	UNIT	MIN.	TYP.	MAX.
Center Frequency Fc	MHz	-	374	-
Bandwidth	MHz	17	20.5	
Insertion Loss @ Passband	dB	-	8.5	10.5
Ripple @ Passband	dB		0.5	1
Relative Attenuation				
309 ~ 352 MHz	dB	40	50	-
352 ~ 357.5 MHz	dB	35	50	-
390.5 ~ 392 MHz	dB	35	45	-
392 ~ 396 MHz	dB	35	40	-
396 ~ 439 MHz	dB	38	42	-
439 ~ 454 MHz	dB	40	45	-
Ultimate Rejection	dB	50	-	-
DC Voltage	V	±30		
Source Power	dBm	0		
Operating Temperature	°C	-35°C to +85°C		
Storage Temperature	°C	-45°C to +85°C		
Group Delay Ripple p-p @ Fc ± 7MHz	nS	-	40	100
Triple Transit Suppression	dB	30	40	-


Electrostatic Sensitive Device. Handle with precaution.

## MARKING:

- 374.00 (374 Frequency in MHz)
- AF ZYX (ZY: Date code Z for month from A to L; Y for year, i.e. 4 for 2004; X: Traceability code)


PIN NO.	CONNECTIONS
1	GND
2	Input- or GND
3	Input+
4	Case GND
5	GND
6	Output- or GND
7	Output+
8	Case GND

## OUTLINE DRAWING:

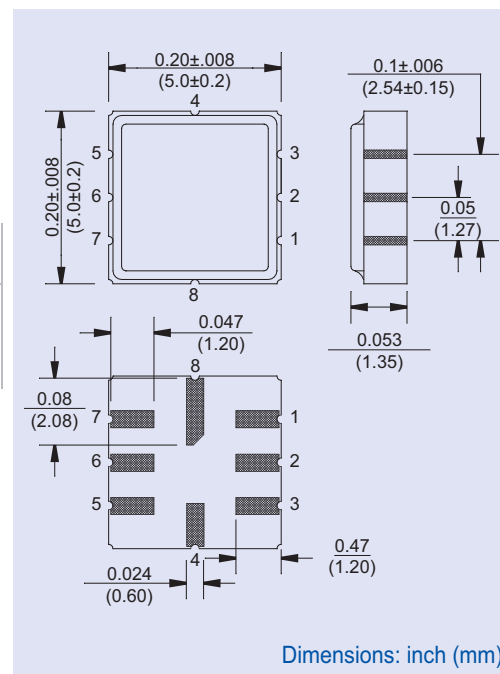

The termination shall be suitable for solder reflow.  
Note: For the test inductors, please refer to Abracon's chip inductor series: AISC-0603.

## FREQUENCY RESPONSE:

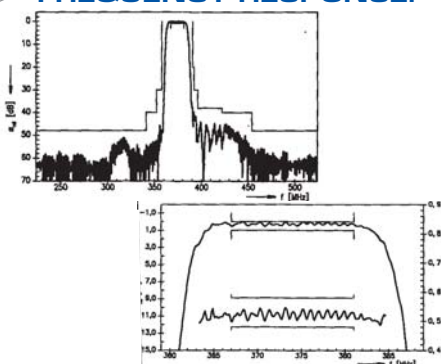

## TEST CIRCUIT:

