



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

Single-chip Type with Built-in FET Switching Regulator Series

Step-down Switching regulators with Built-in Power MOSFET

BU9000xGWZ series

● General Description

The BU9000xGWZ are a high efficiency 6MHz synchronous step-down switching regulator with ultra low current PFM mode.

It provides up to 1.0A load current and an input voltage range from 3.0V to 5.5V, optimized for battery powered portable applications.

BU9000xGWZ has a mode control pin that allows the user to select Forced PWM (Pulse Width Modulation) mode or PFM (Pulse Frequency Modulation) and PWM auto change mode utilized power save operation at light load current.

● Features

- Fast transient response
- Automatic PFM/PWM operation
- Forced PWM operation
- Internal Soft Start
- Under voltage lockout
- Over current protection
- Thermal shutdown

● Lineup

Part No.	Output voltage	Input voltage	Switching frequency	Operating mode		
				MODE=L	MODE=H	
BU90002GWZ	3.30V	4.0V to 5.5V	5.4MHz to 6.6MHz	Automatic PFM/PWM	Forced PWM	
BU90003GWZ	1.20V	2.3V to 5.5V	3.6MHz to 4.4MHz			
BU90004GWZ	1.80V	2.3V to 5.5V	4.8MHz to 6.0MHz			
BU90005GWZ	2.50V	2.3V to 5.5V	5.4MHz to 6.6MHz	Forced PFM		
BU90006GWZ	3.00V	2.3V to 5.5V	5.4MHz to 6.6MHz			
BU90007GWZ	1.25V	2.3V to 5.5V	3.6MHz to 4.4MHz			
BU90008GWZ	1.00V	2.3V to 5.5V	3.2MHz to 4.0MHz	Automatic PFM/PWM		
BU90009GWZ	1.30V	2.3V to 5.5V	3.8MHz to 4.8MHz			

● Pin Configuration(s)




Figure 2. Pin Configuration(s)

● Applications

Smart phones, Cell phones, Portable applications, Micro DC/DC modules, and USB accessories

● Package(s)

UCSP35L1

W(Typ.) x D(Typ.) x H(Max.)
1.30mm x 0.90mm x 0.40mm

● Typical Application Circuit(s)

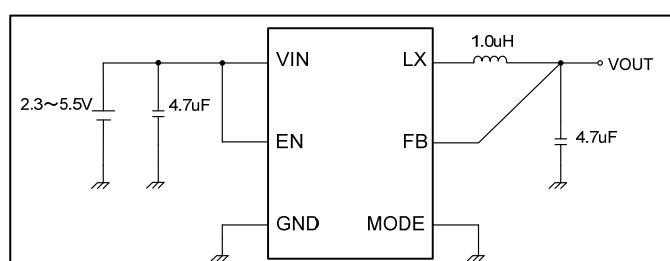


Figure 1. Typical Application Circuit(s)

● Pin Description(s)

Pin No.	Symbol	Function
A1	VIN	Power supply input pin
A2	EN	Enable pin
A3	GND	GND pin
B1	MODE	Forced PWM mode pin
B2	LX	Inductor connection pin
B3	FB	Feedback voltage input pin

● Block Diagram(s)

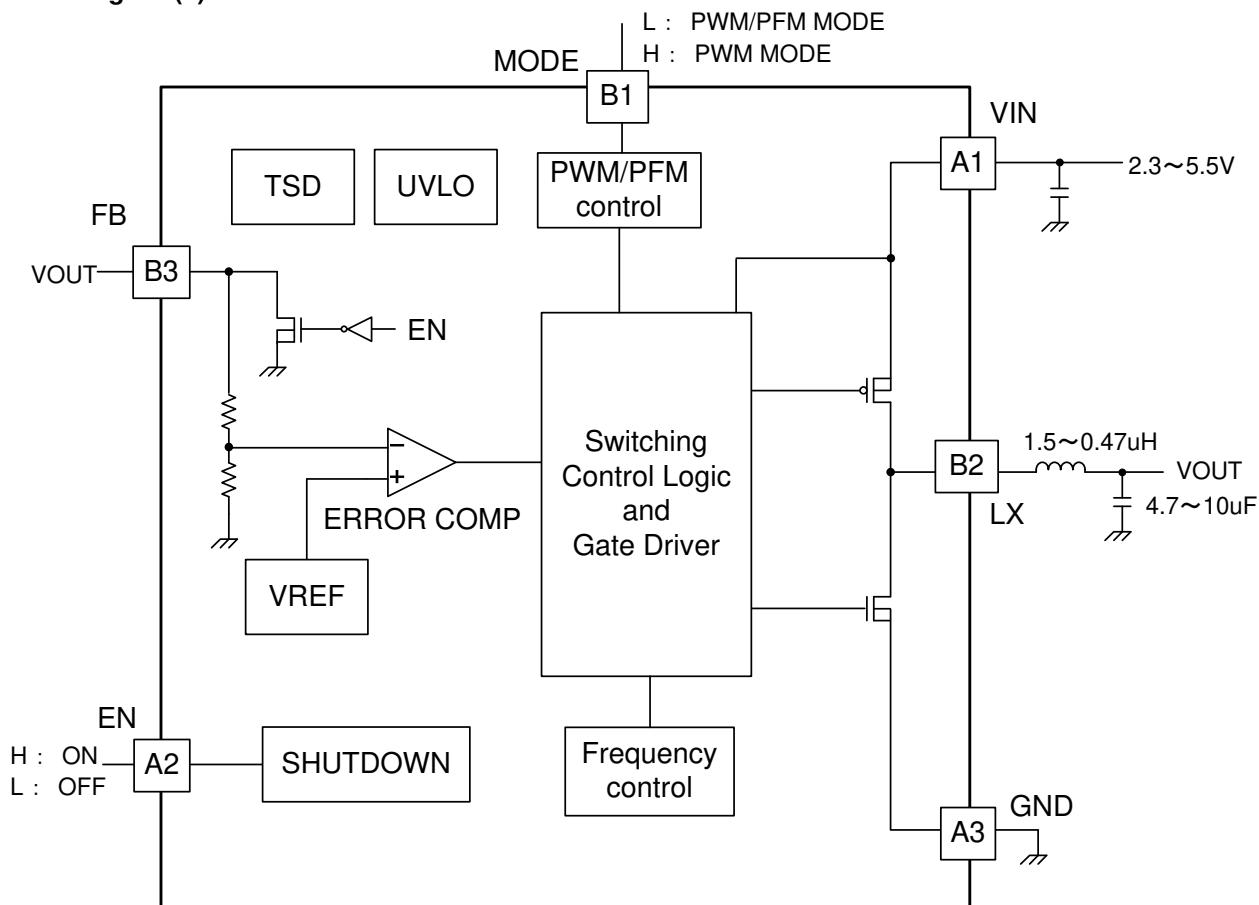


Figure 3. Block Diagram(s)

● Description of Block(s)

The BU9000xGWZ are a synchronous step-down DC/DC converter that achieves fast transient response from light load to heavy load by hysteretic PWM control system and current constant PFM control system.

OPWM control

BU9000xGWZ operates by hysteretic PWM control. This scheme ensures fast switching, high efficiency, and fast transient response.

When the output voltage is below the VREF voltage, the error comparator output is low to high and turning on P-channel MOSFET until above the VREF voltage and minimum on time.

OPFM control

At light load the regulator and MODE=low, the regulator operates with reduced switching frequency and improves the efficiency. During PFM operation, the output voltage slightly higher than typical output voltage.

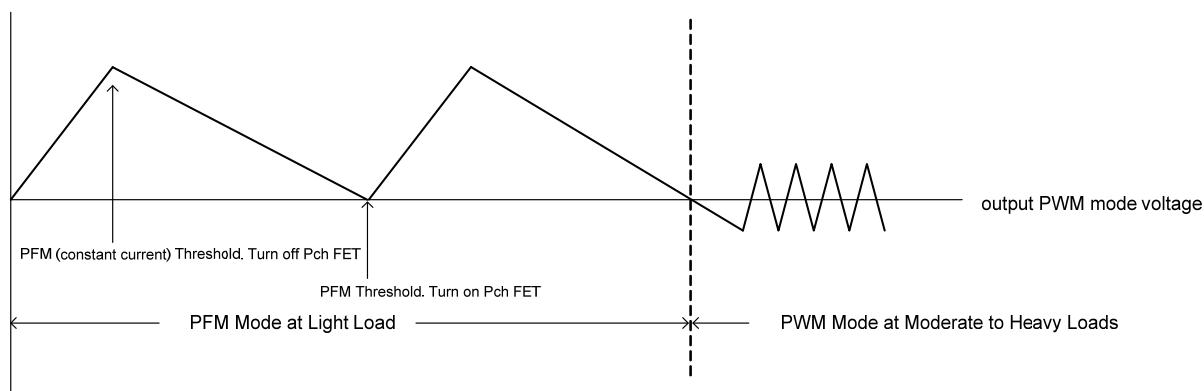


Figure 4. Operation of PFM mode and PWM mode

●Description of operations

1) Shutdown

If the EN input pin set to low (<0.4V), all circuit are shut down and the regulator is standby mode.
Do not leave the EN pin floating.

2) Soft start function

The regulator has a soft start circuit that reduces in-rush current at start-up. Typical start up times with a 4.7uF output capacitor is 120usec.

3) Current limit

The BU9000xGWZ has a current limit circuit that protects itself and external components during overload condition.

4) UVLO

The BU9000xGWZ has a Under Voltage Lock Out circuit that turn off device when VIN>2.05V(typ.)

5) FORCED PWM MODE

Setting MODE pin high (>1.4V) places the regulator in forced PWM. This control provides noise reduction and output stability. Do not leave the MODE pin floating.

6) FORCED PFM MODE (BU90005GWZ)

Setting MODE pin low (<0.4V) places the regulator in forced PFM. It is effective in light load mode.

7) TSD

The BU9000xGWZ has a thermal shutdown feature to protect the device if the junction temperature exceeds 150°C. In thermal shutdown, the DRIVER is disabled.

This circuit is only to cut off the IC from thermal runaway, and has not been design to protect or guarantee the IC. Therefore, the user should not plan to activate this circuit with continued operation in mind.

●Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating		Unit
Maximum input power supply voltage	VIN	7		V
Maximum voltage at EN, FB, LX, MODE	VEN, VFB, VLX, VMODE	7		V
Power dissipation	Pd	0.39(*1)		W
Operating temperature range	Topr	-40 to +85		°C
Storage temperature range	Tstg	-55 to +125		°C
Junction temperature	Tjmax	+125		°C

(*1) When mounted on the specified PCB (55mm x 63mm), Deducted by 3.9m W/c when used over Ta=25c

●Recommended Operating Rating(s)

Parameter	Symbol	Rating			Unit	Serise
		Min.	Typ.	Max.		
Input voltage	VIN	4.0	-	5.5	V	BU90002GWZ
		2.3	-	5.5		BU90003~BU90009GWZ

●Electrical Characteristic(s) (unless otherwise specified VIN=3.6V, Ta=25°C)

Item	Symbol	Rating			Unit	Condition
		Min.	Typ.	Max.		
【Switching regulator】						
Output voltage accuracy	VOUTA	-2	-	+2	%	MODE:H(PWM Operation)
		-2	-	+3		MODE:L(PFM Operation)
Maximum load current	IoutMAX1	-	-	1.0	A	3.0V≤VIN<5.5V
	IoutMAX2	-	-	0.8	A	2.7V≤VIN<3.0V
	IoutMAX3	-	-	0.6	A	2.3V≤VIN<2.7V
	IoutMAX4	-	-	0.1	A	MODE:L(PFM Operation) (BU90005GWZ,)
【Soft start】						
Soft start time	Tss	65	120	240	usec	(BU90002GWZ, BU90003GWZ, BU90004GWZ, BU90005GWZ, BU90006GWZ, BU90007GWZ, BU90009GWZ)
		55	110	220	usec	(BU90008GWZ)
【Frequency control】						
Switching frequency	fosc	5.4	6.0	6.6	MHz	No load, MODE:H (BU90002GWZ, BU90005GWZ, BU90006GWZ)
		4.8	5.4	6.0	MHz	No load, MODE:H (BU90004GWZ)
		3.6	4.0	4.4	MHz	No load, MODE:H (BU90003GWZ, BU90007GWZ)
		3.2	3.6	4.0	MHz	No load, MODE:H (BU90008GWZ)
		3.8	4.3	4.8	MHz	No load, MODE:H (BU90009GWZ)
【Driver】						
PchFET on resistance	RonP1	-	250	400	mOhm	VIN=5.0V
	RonP2		300	450	mOhm	VIN=3.6V
NchFET on resistance	RonN1	-	220	350	mOhm	VIN=5.0V
	RonN2		250	380	mOhm	VIN=3.6V
【Control】						
EN pin control voltage	Operation	VENH	1.4	-	VIN	V
	Non Operation	VENL	0	-	0.4	V
MODE pin control voltage	Operation	VMODEH	1.4	-	VIN	V
	Non Operation	VMODEL	0	-	0.4	V
Automatic PFM/PWM (BU90005GWZ : Forced PFM)						
【UVLO】						
Protect threshold voltage	Uvth	1.95	2.05	2.15	V	
Hysteresis	Uvhy	50	100	150	mV	
【Current limit】						
Current limit threshold	ILIMIT	1.5	1.7	1.9	A	PMOS current detect, Open loop
【Output discharge】						
Output discharge resistance	DRES	15	30	60	Ohm	EN=0V, FB=0.5V
【Circuit current】						
Operating quiescent current	IINS1	-	45	65	uA	No load, EN:H, MODE:L, VOUT=3.6V forced Not switching (BU90003GWZ, BU90004GWZ, BU90005GWZ, BU90007GWZ, BU90008GWZ, BU90009GWZ)
	IINS2	-	55	80	uA	No load, EN:H, MODE:L, VOUT=3.6V forced Not switching (BU90002GWZ, BU90006GWZ)
	IQ1	-	5.2	-	mA	No load, EN:H, MODE:H, PWM operation L:LQM21MPN1R0NG0 (BU90003GWZ)
	IQ2	-	5.6	-	mA	No load, EN:H, MODE:H, PWM operation L:LQM21MPN1R0NG0 (BU90004GWZ)
Shutdown current	SHD	-	0	1	uA	EN=0V

● Electrical Characteristic curves (Reference data)

BU90002GWZ (3.3V OUTPUT)

Parts

L:LQM21MPN1R0NG0 (2.0mm × 1.6mm × 1.0mm Murata)

COUT:GRM155R60J475M(1.0mm × 0.5mm × 0.5mm Murata)

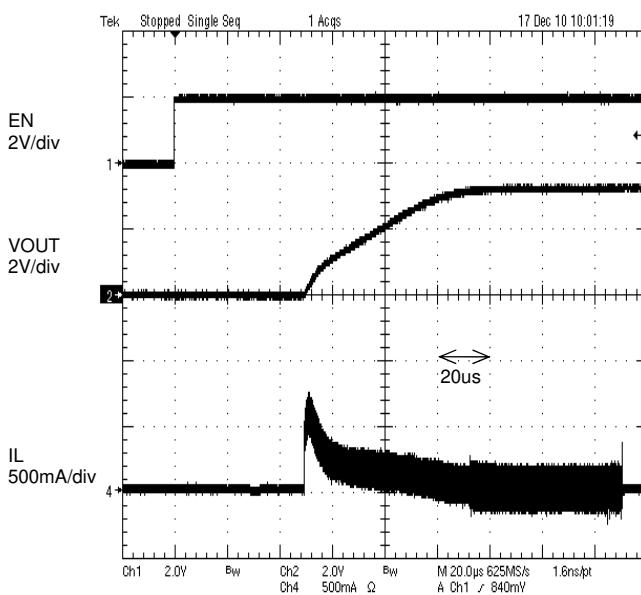


Figure 5. Start up

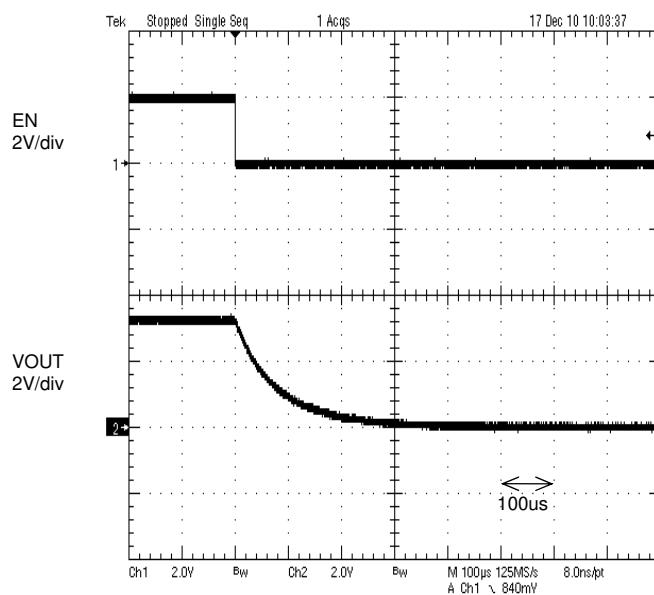


Figure 6. Shut down

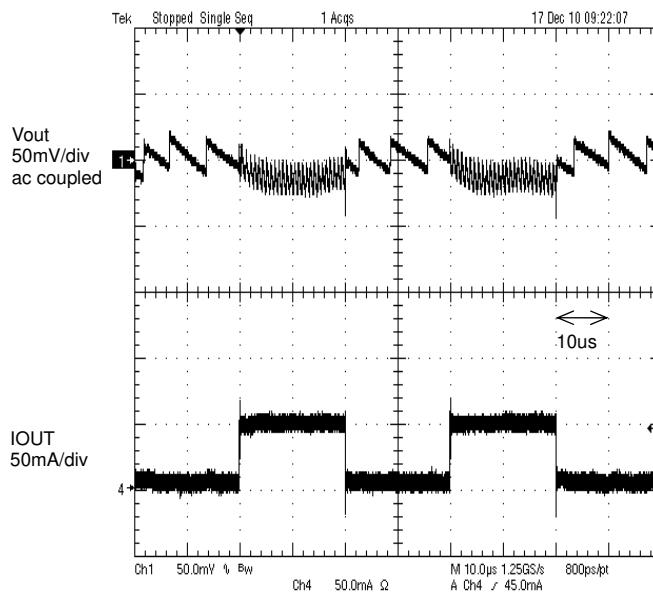


Figure 7. Load transient response 5mA to 50mA
tr=tf=100ns, MODE : Low

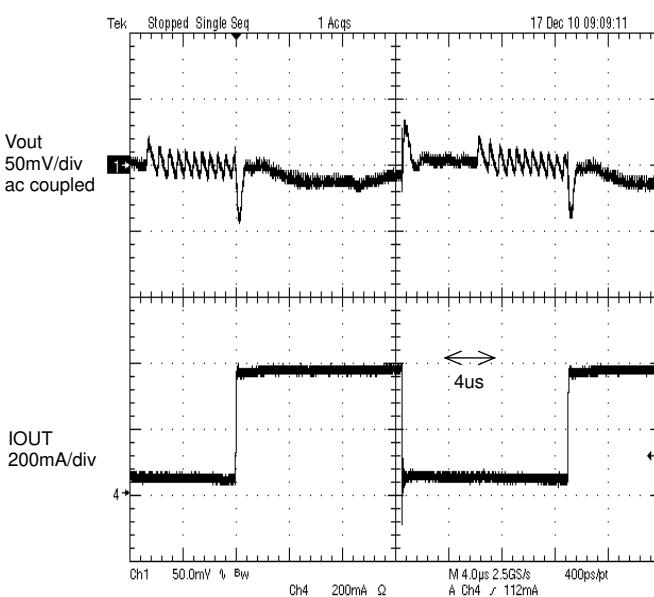


Figure 8. Load transient response 50mA to 350mA
tr=tf=100ns, MODE : Low

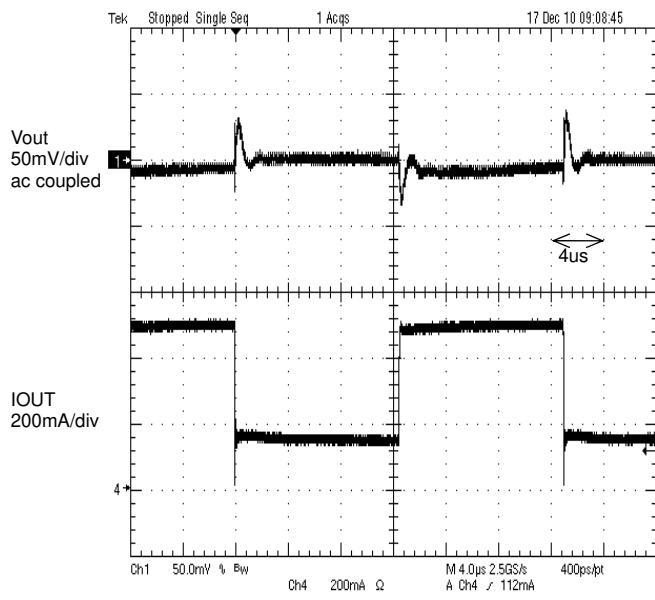


Figure 9. Load transient response 150mA to 500mA
tr=tf=100ns, MODE : High

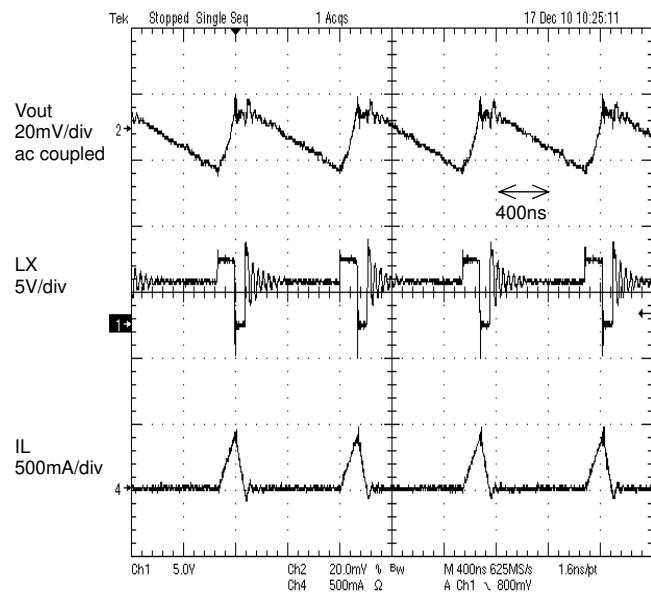


Figure 10. PFM mode Operation
Iout=40mA

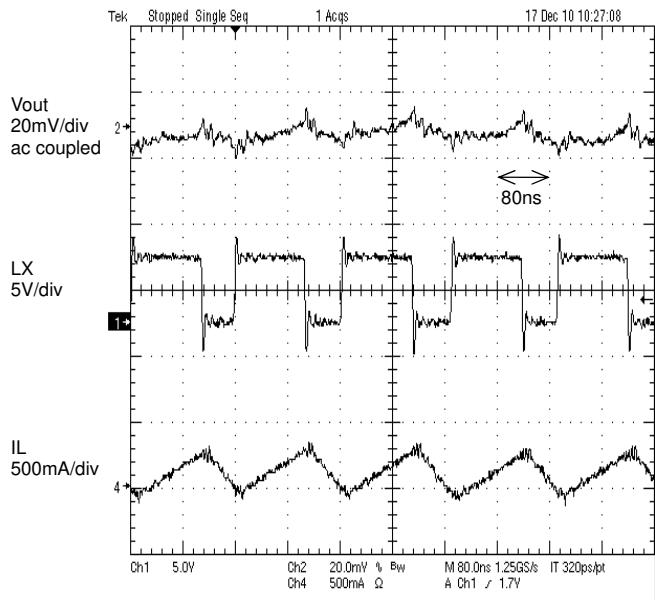


Figure 11. PWM mode Operation
Iout=100mA

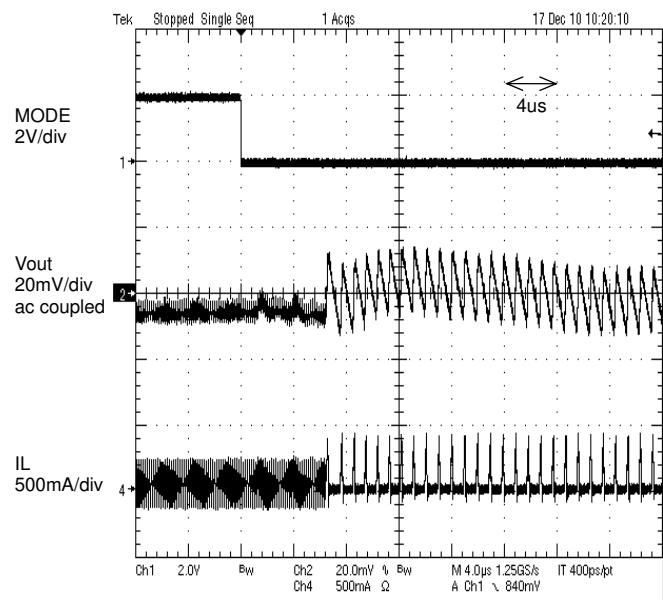


Figure 12. Mode Change Response
MODE : High to Low

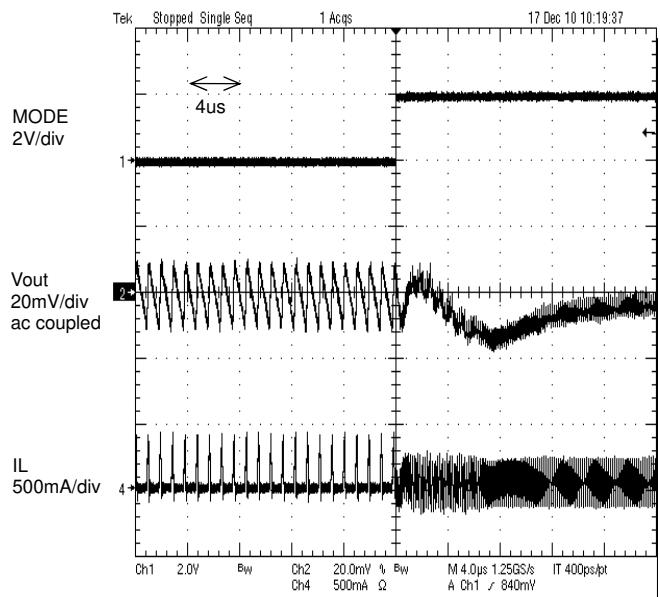


Figure 13. Mode Change Response
 MODE : Low to High

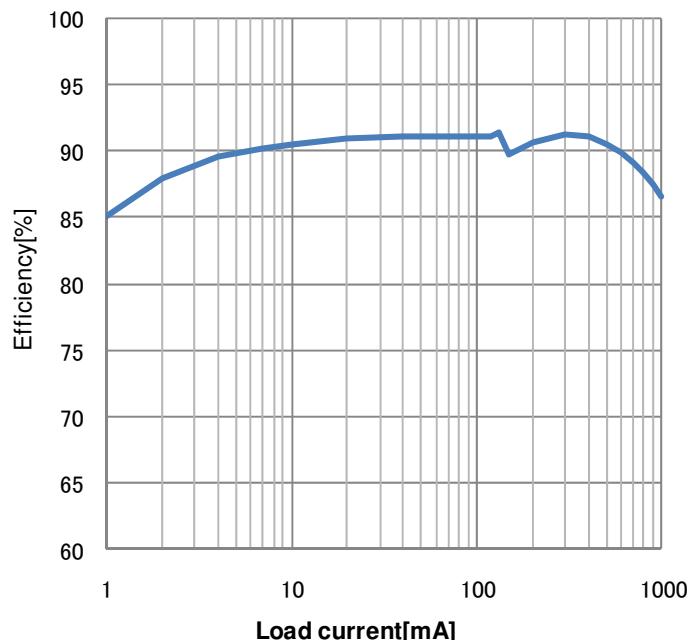


Figure 14. Efficiency vs Load current
 VIN=5V PWM/PFM Auto mode

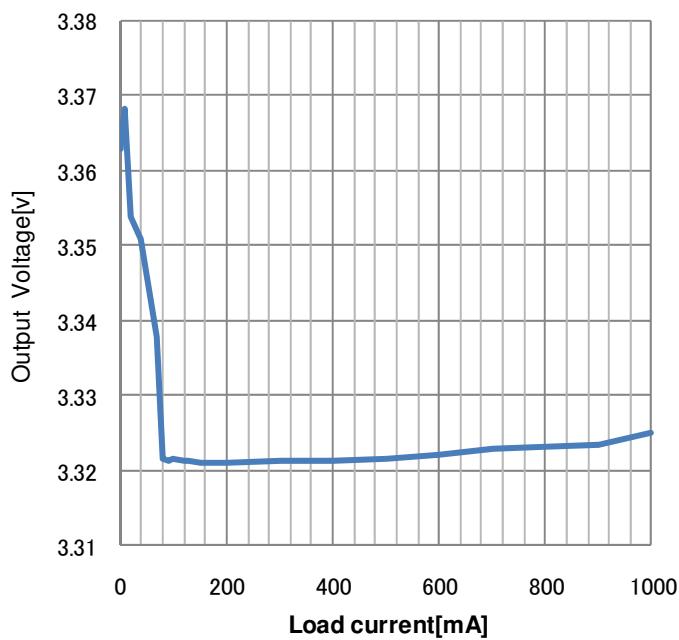


Figure 15. Load regulation
 VIN=5V PWM/PFM Auto mode

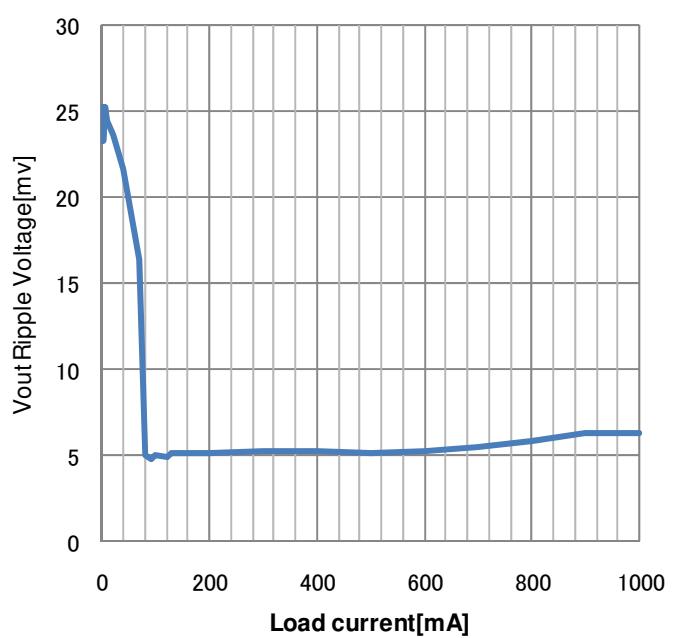


Figure 16. Vout Ripple Voltage
 VIN=5V PWM/PFM Auto mode

● Electrical characteristic curves (Reference data)
BU90003GWZ (1.2V OUTPUT)

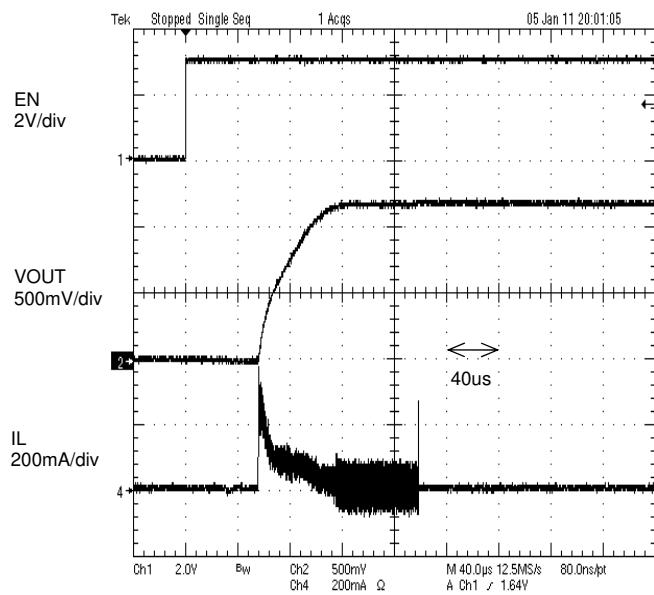


Figure 17. Start up

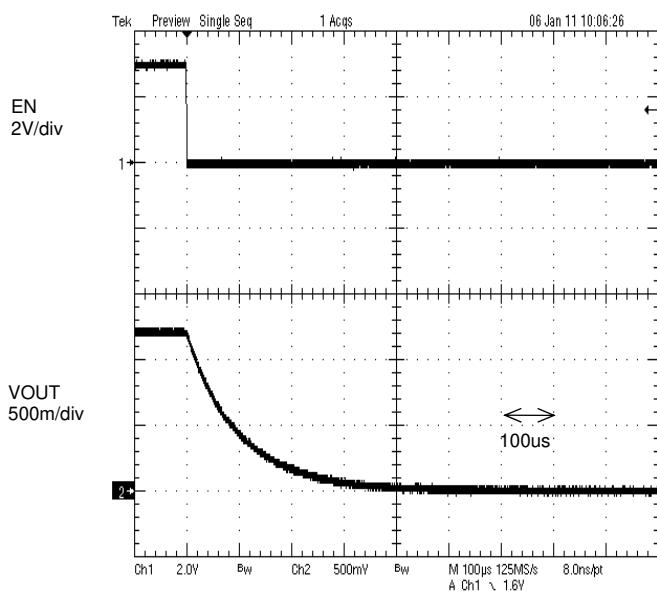
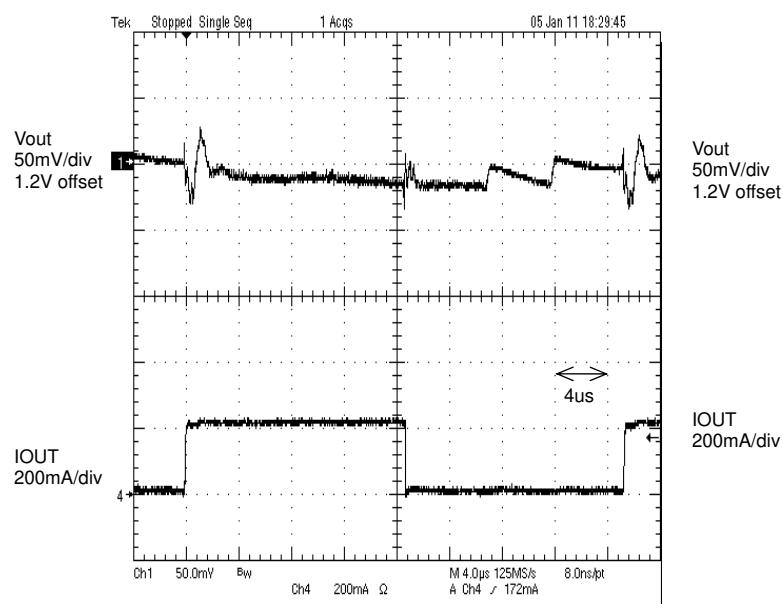
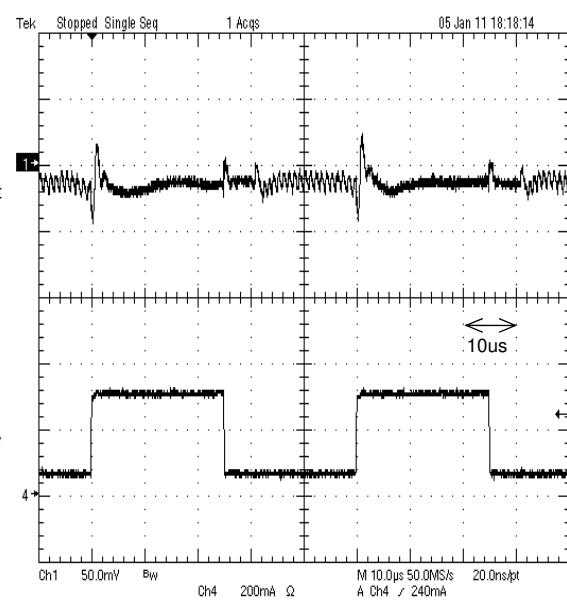


Figure 18. Shut down

Figure 19. Load transient response 5mA to 200mA
tr=tf=100ns, MODE : LowFigure 20. Load transient response 50mA to 350mA
tr=tf=100ns, MODE : Low

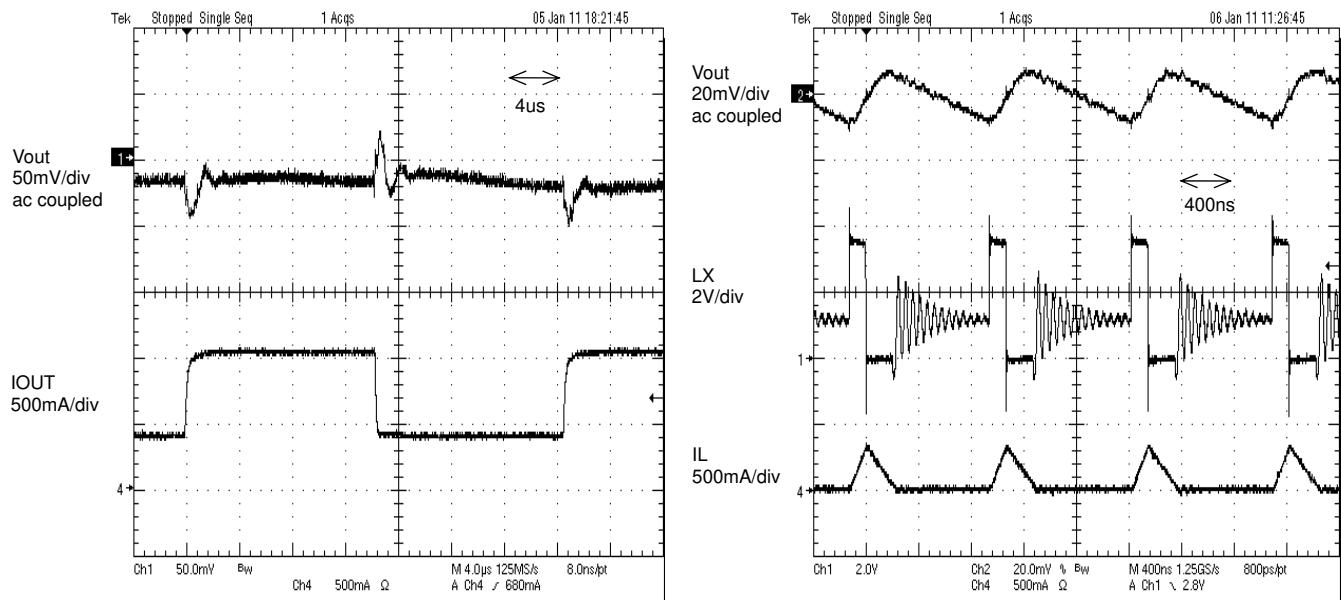


Figure 21. Load transient response 400mA to 1000mA
tr=tf=100ns, MODE : Low

Figure 22. PFM mode Operation Iout=50mA

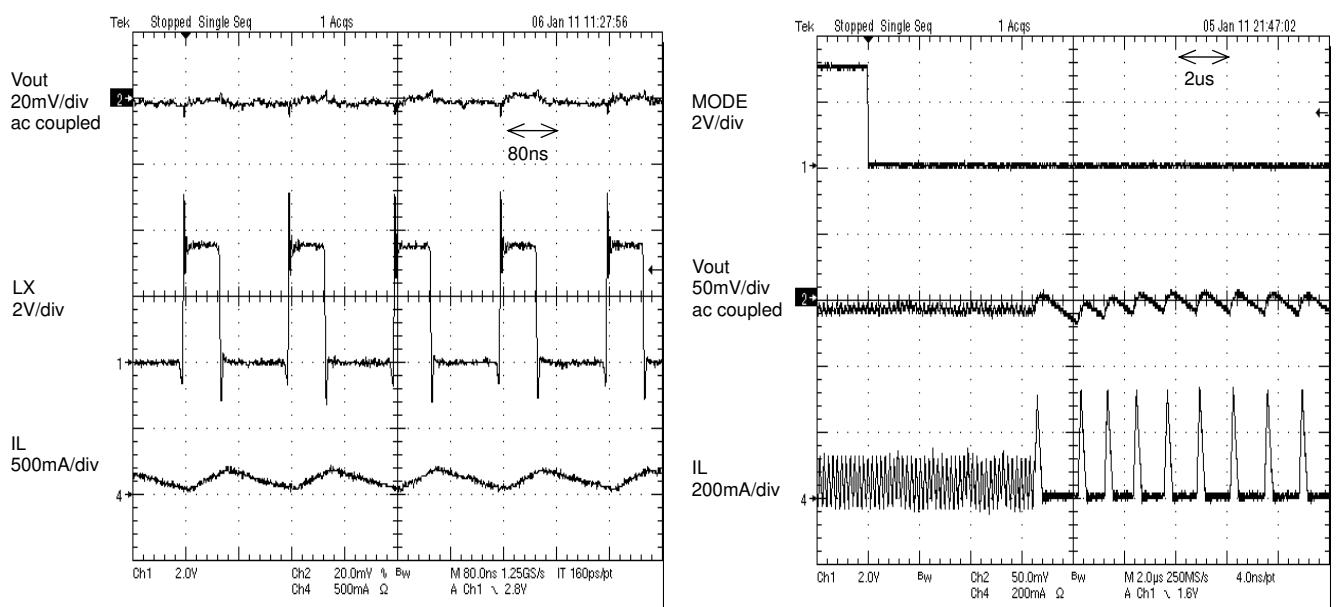


Figure 23. Fig.23 PWM mode Operation Iout=100mA

Figure 24. Mode Change Response
MODE : High to Low

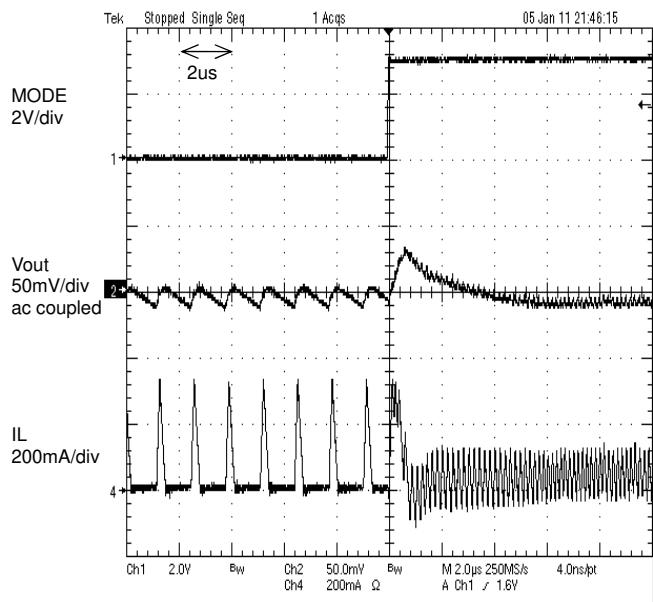


Figure 25. Mode Change Response
MODE : Low to High

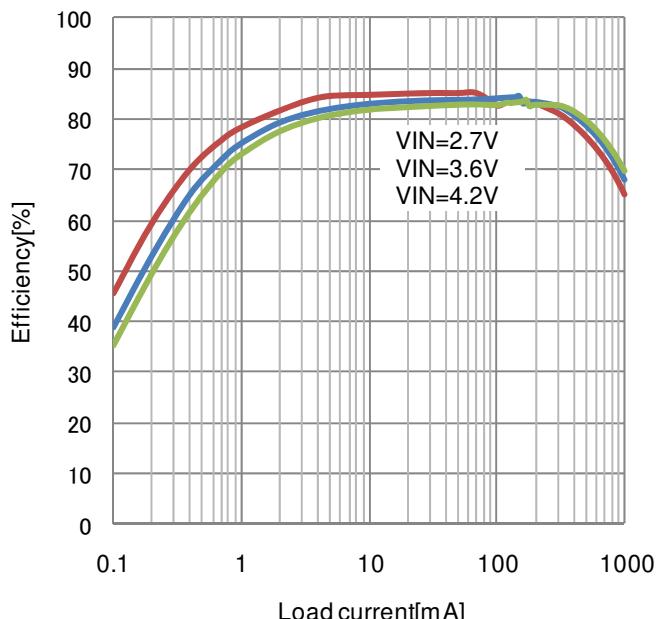


Figure 26. Efficiency vs Load current
PWM/PFM Auto mode

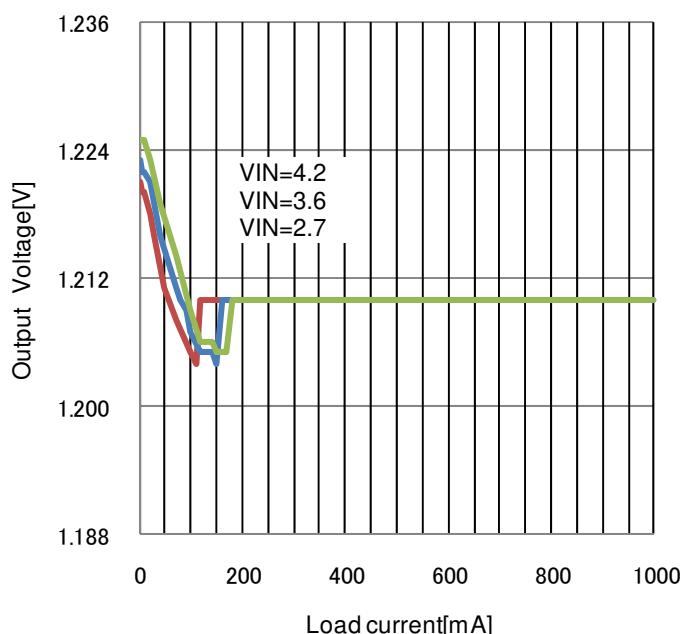


Figure 27. Load regulation
PWM/PFM Auto mode

● Electrical characteristic curves (Reference data)
BU90004GWZ (1.80V OUTPUT)

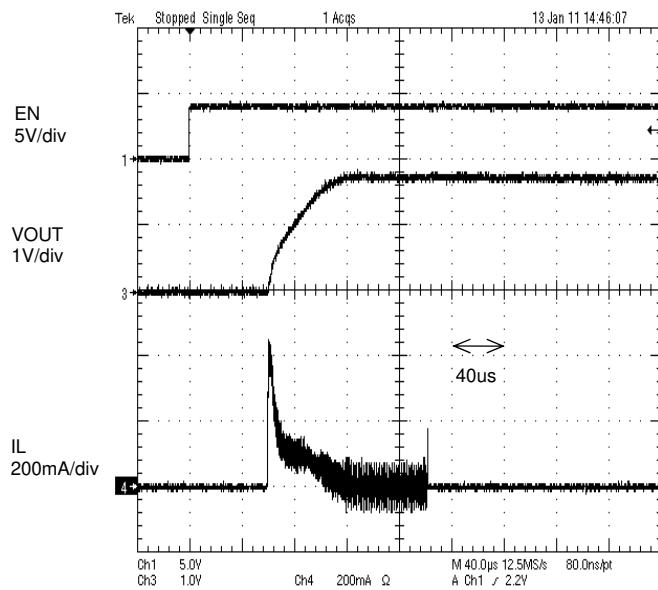


Figure 28. Start up

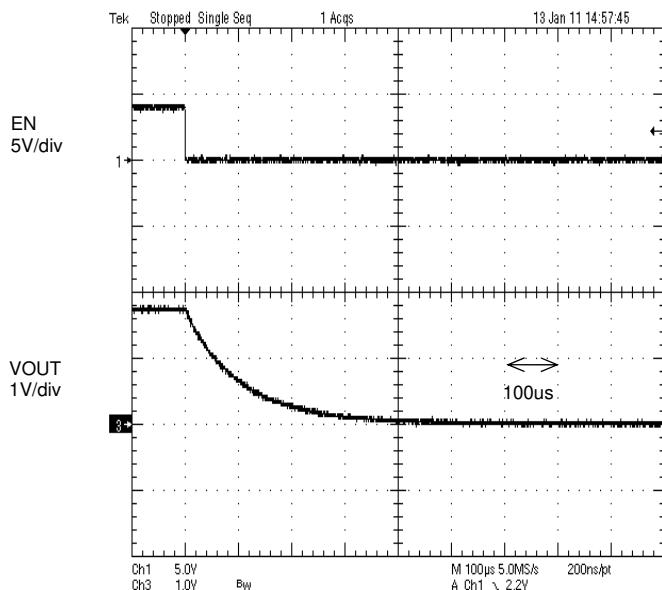
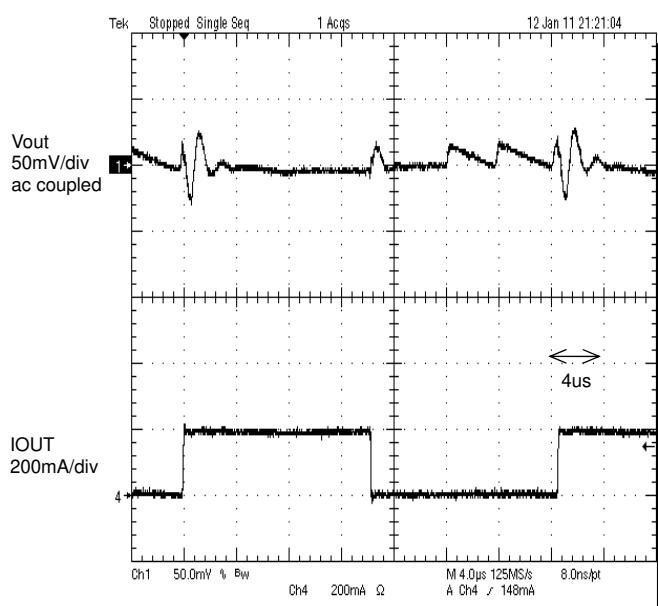
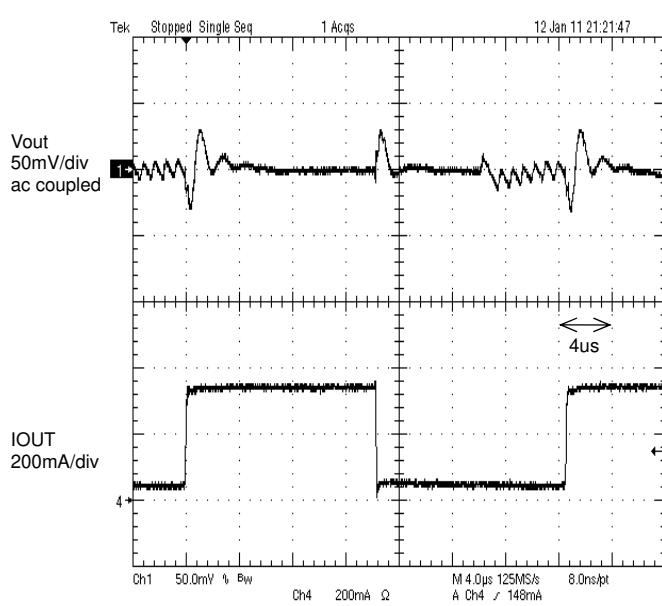


Figure 29. Shut down

Figure 30. Load transient response 5mA to 200mA
tr=tf=100ns, Mode : LowFigure 31. Load transient response 50mA to 350mA
tr=tf=100ns, Mode : Low

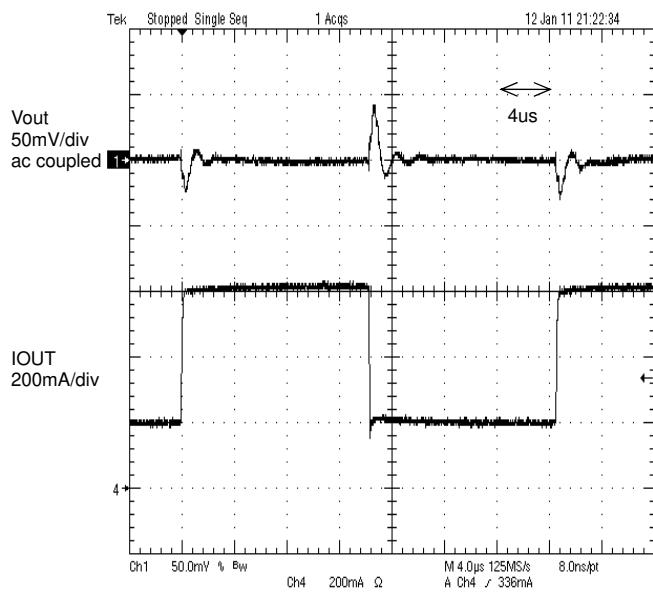


Figure 32. Load transient response 200mA to 600mA
 $t_r=t_f=100\text{ns}$, MODE : Low

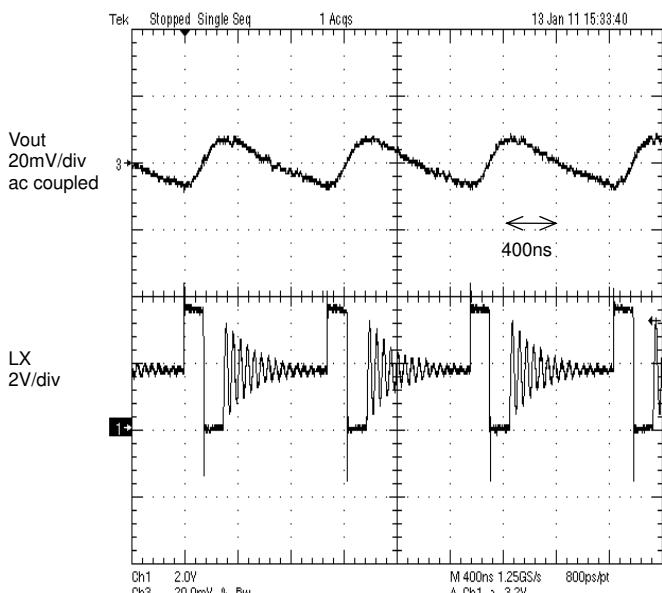


Figure 33. PFM mode Operation $I_{out}=50\text{mA}$

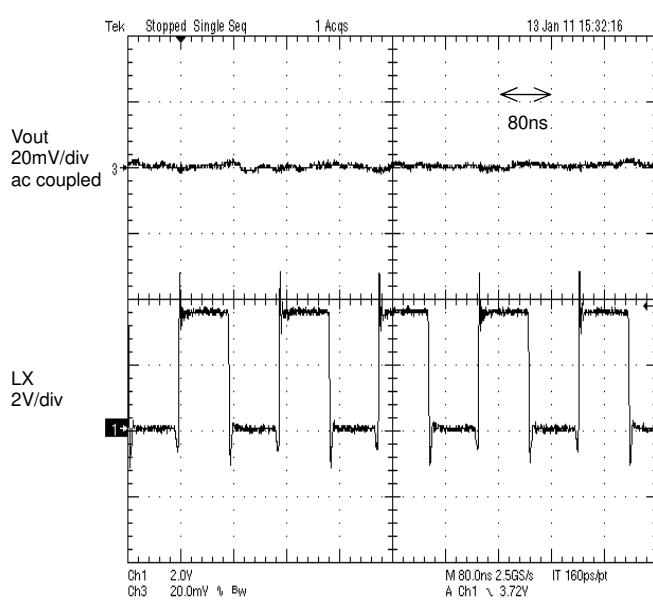


Figure 34. PWM mode Operation $I_{out}=100\text{mA}$

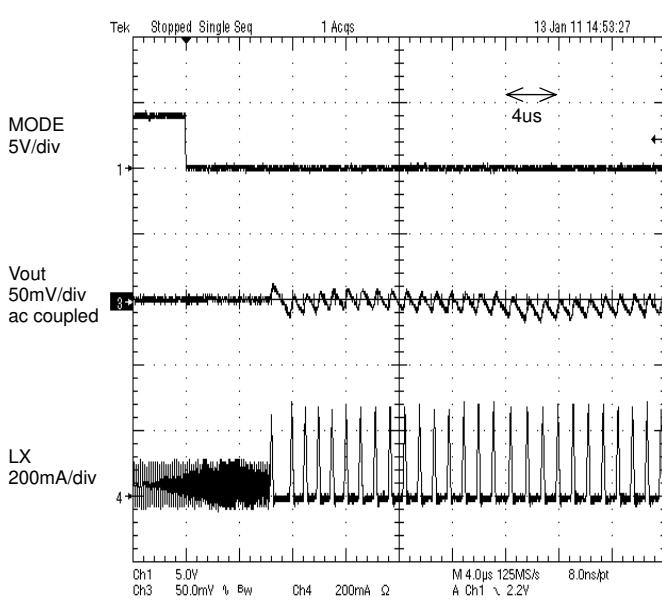


Figure 35. Mode Change Response
 MODE : High to Low

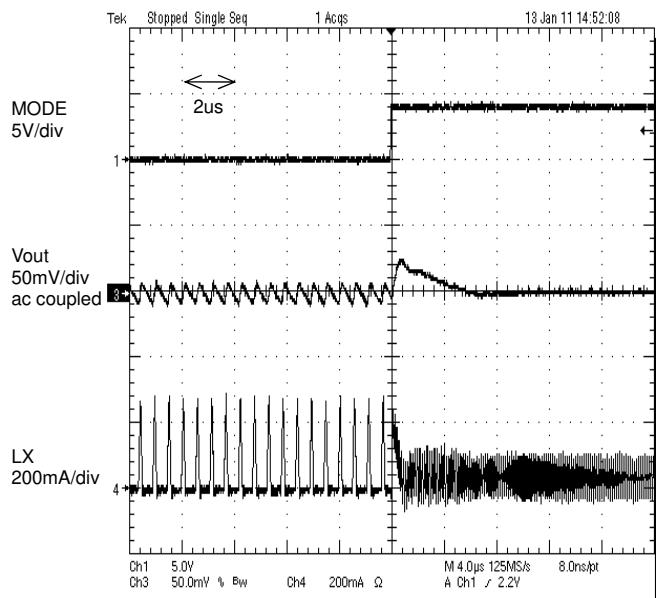


Figure 36. Mode Change Response
MODE : Low to High

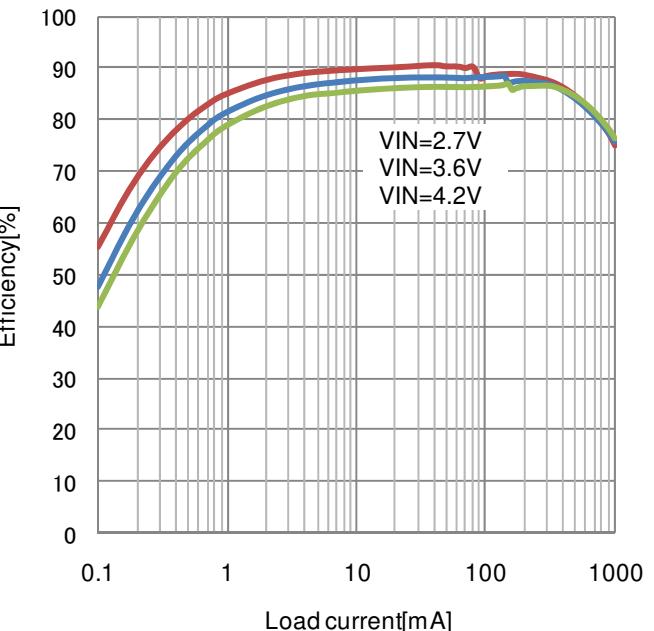


Figure 37. Efficiency vs Load current
PWM/PFM Auto mode

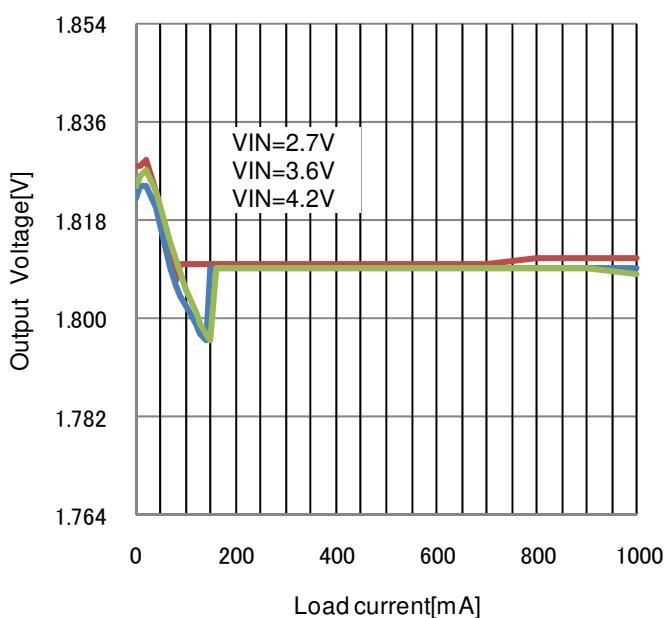


Figure 38. Load regulation
PWM/PFM Auto mode

● Electrical characteristic curves (Reference data)
BU90005GWZ (2.50V OUTPUT)

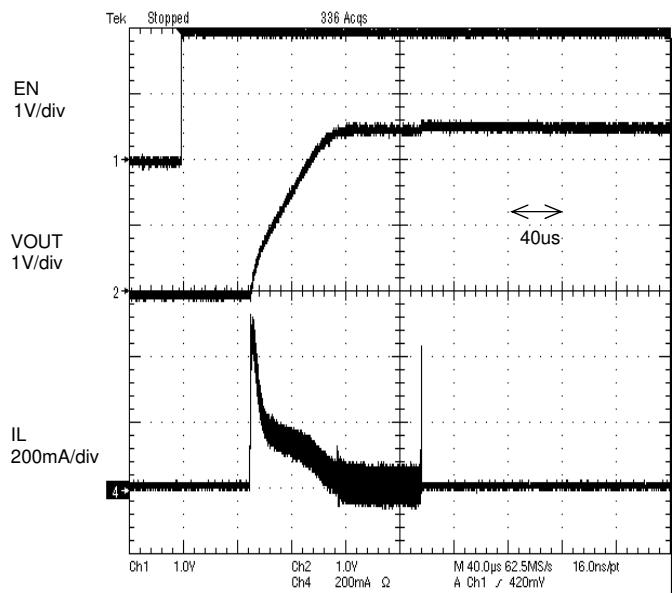


Figure 39. Start up

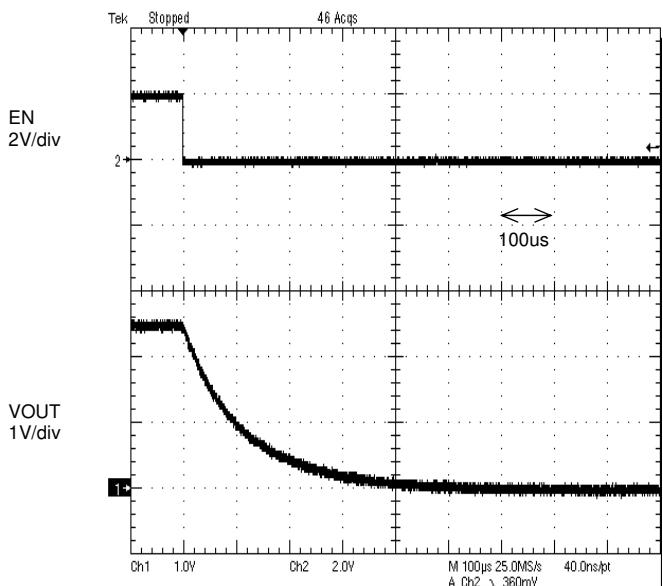
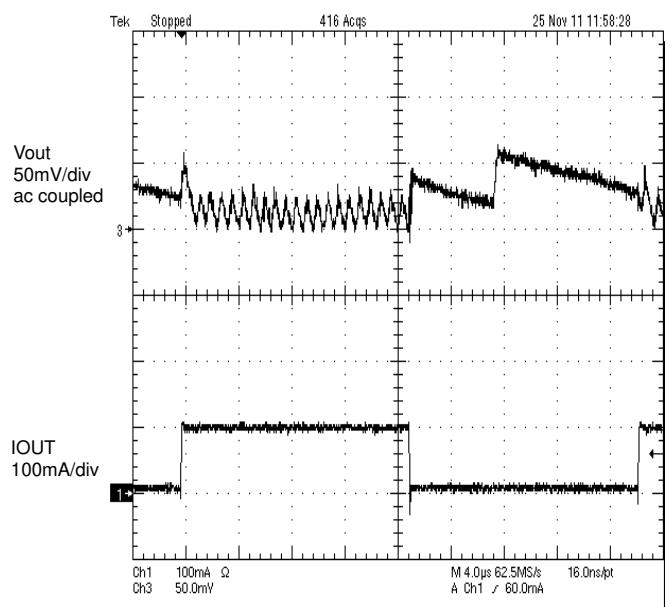
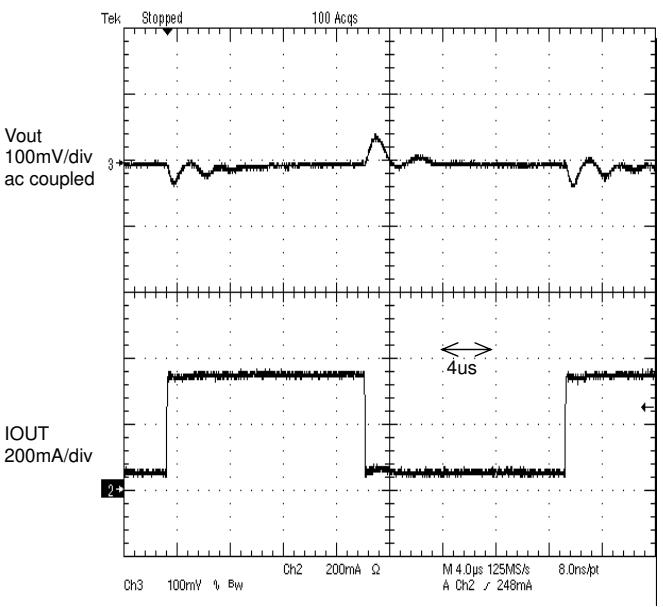


Figure 40. Shut down

Figure 41. Load transient response 5mA to 100mA
 $t_r=t_f=100\text{ns}$, MODE : LowFigure 42. Load transient response 50mA to 350mA
 $t_r=t_f=100\text{ns}$, MODE : High

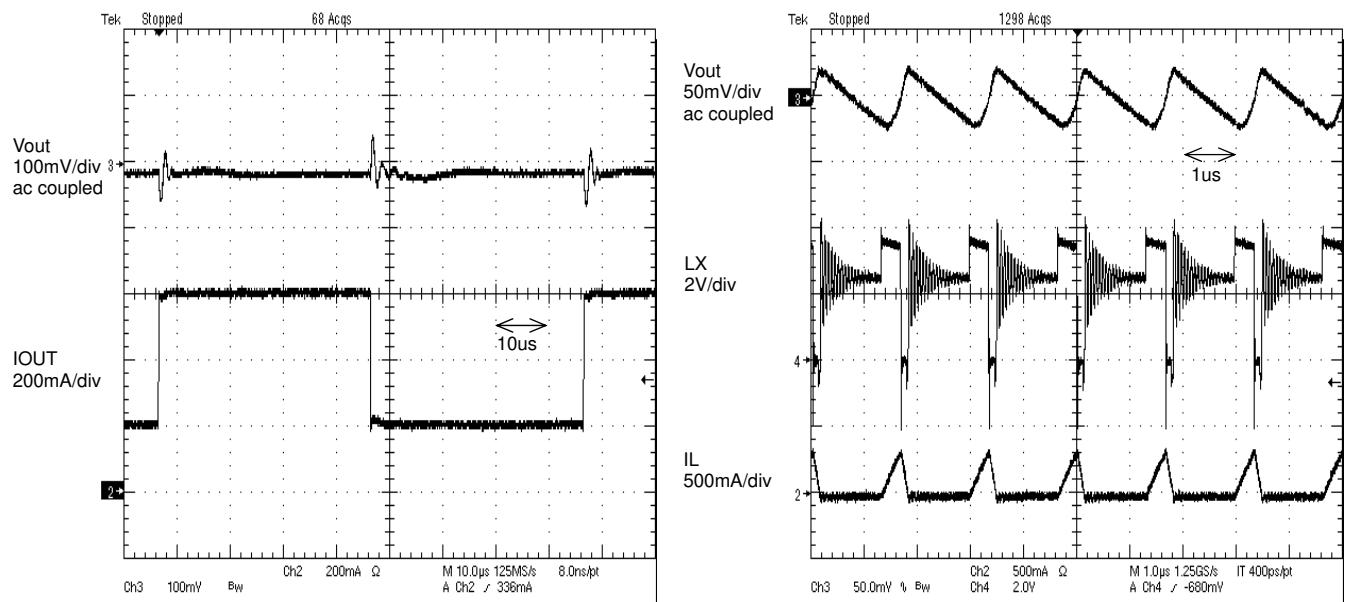


Figure 43. Load transient response 200mA to 600mA
tr=tf=100ns, MODE : High

Figure 44. PFM mode Operation lout=50mA

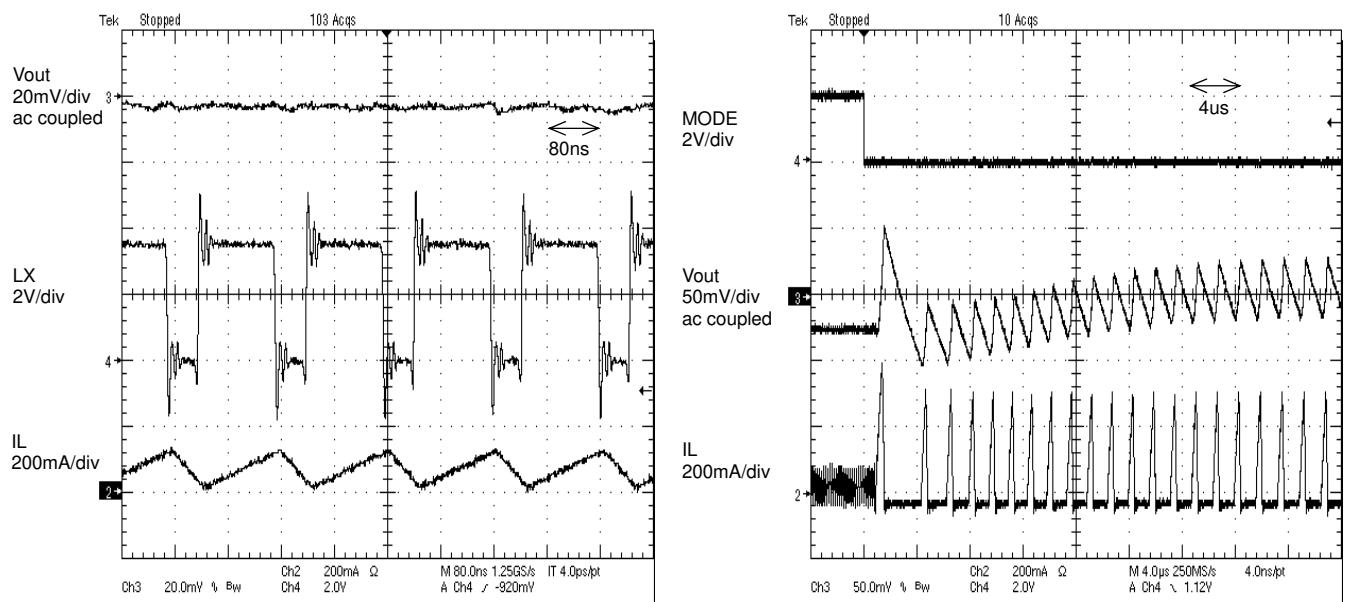


Figure 45. PWM mode Operation lout=100mA

Figure 46. Mode Change Response
MODE : High to Low

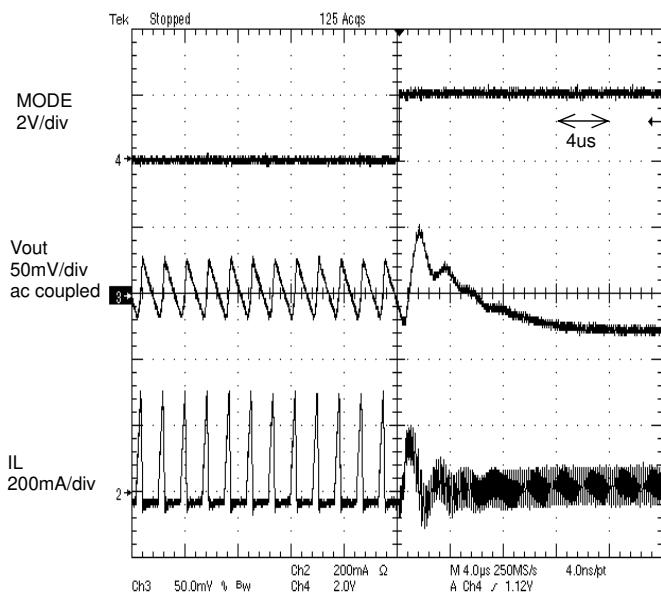


Figure 47. Mode Change Response
MODE : Low to High

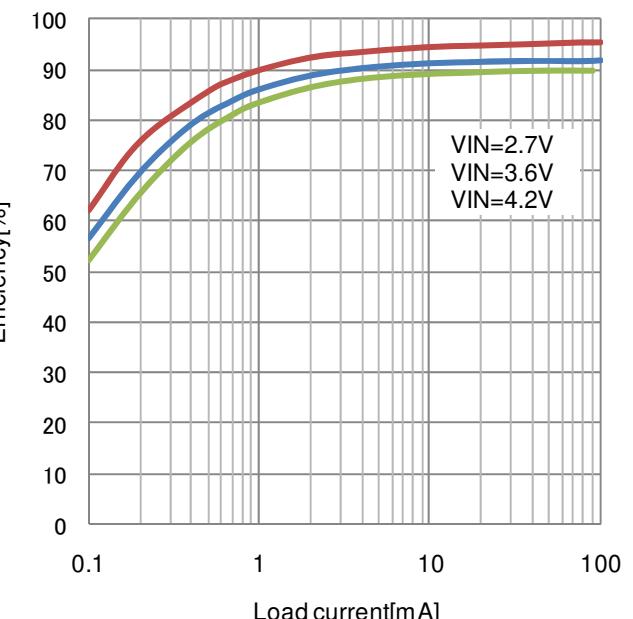


Figure 48. Efficiency vs Load current
PFM mode

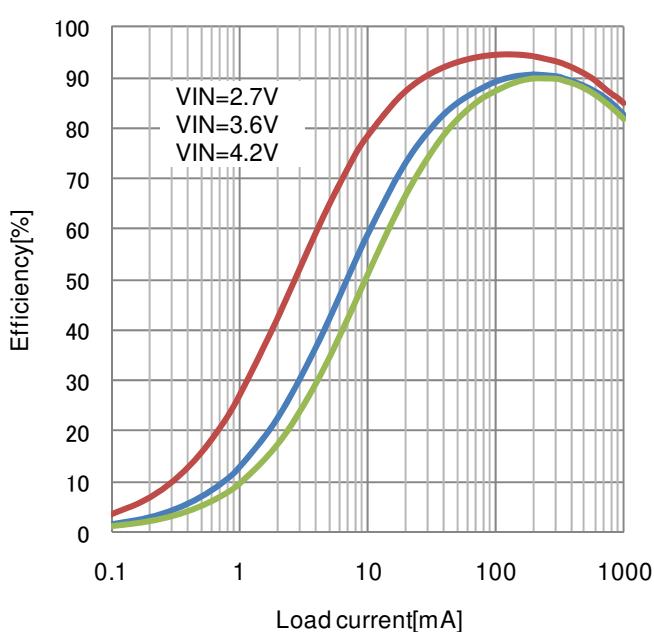


Figure 49. Efficiency vs Load current
PWM mode

● Electrical characteristic curves (Reference data)
BU90008GWZ (1.000V OUTPUT)

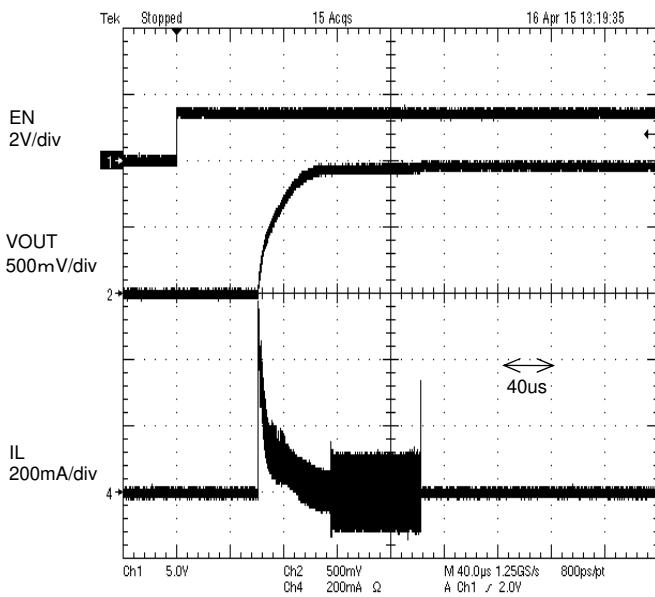


Figure 50. Start up

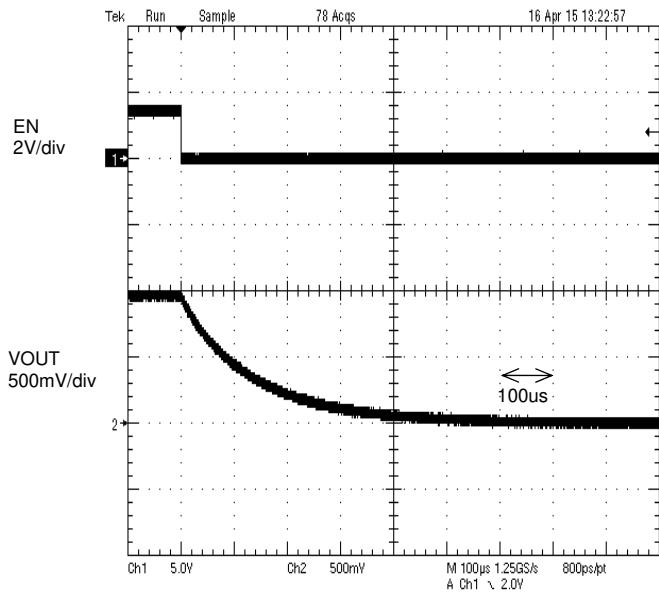
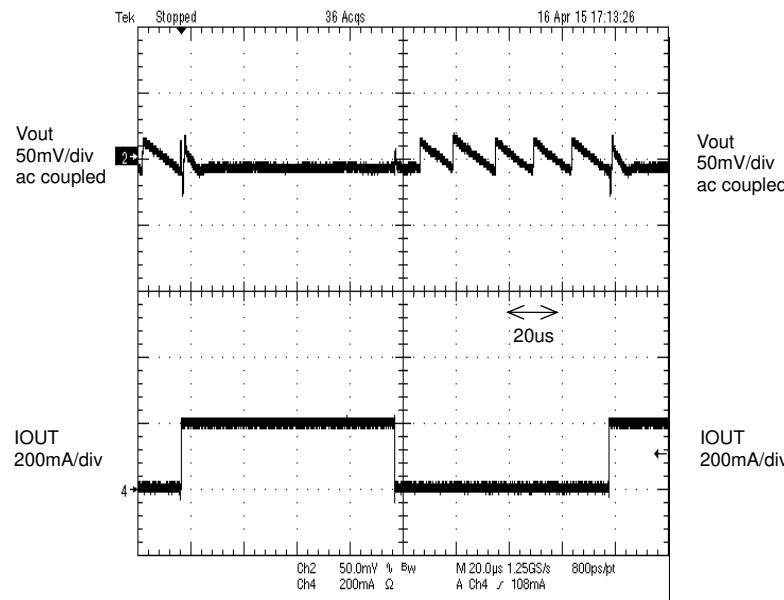
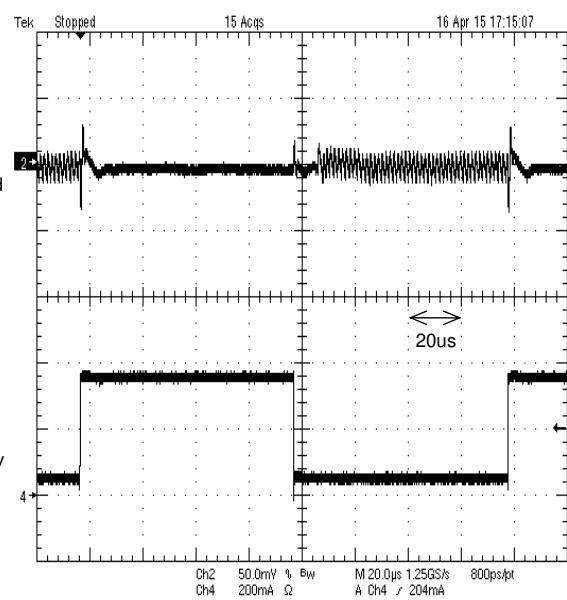


Figure 51. Shut down

Figure 52. Load transient response 5mA to 100mA
tr=tf=100ns, MODE : LowFigure 53. Load transient response 50mA to 350mA
tr=tf=100ns, MODE : High

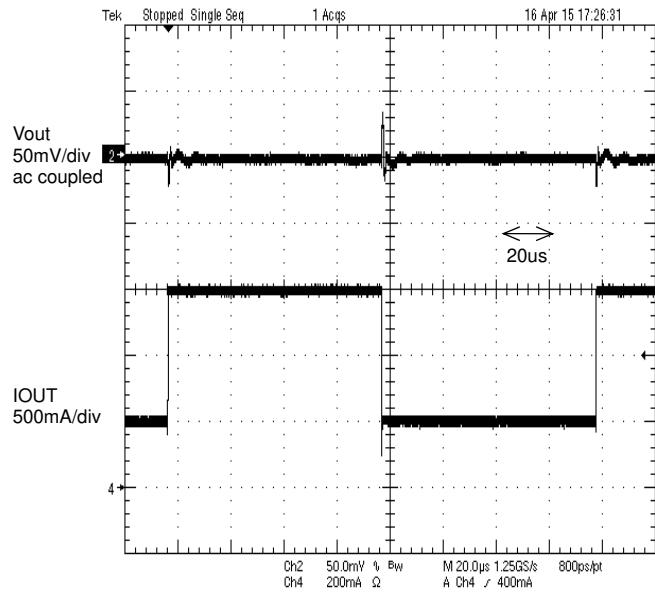


Figure 54. Load transient response 200mA to 600mA
tr=tf=100ns, MODE : High

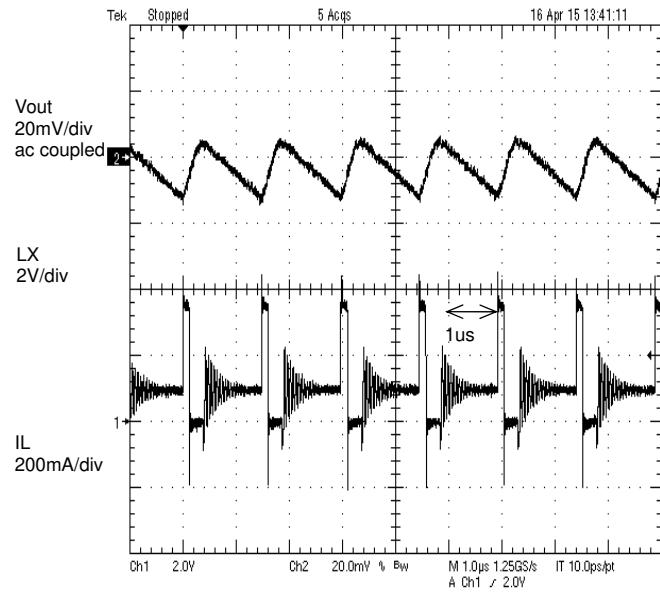


Figure 55. PFM mode Operation lout=50mA

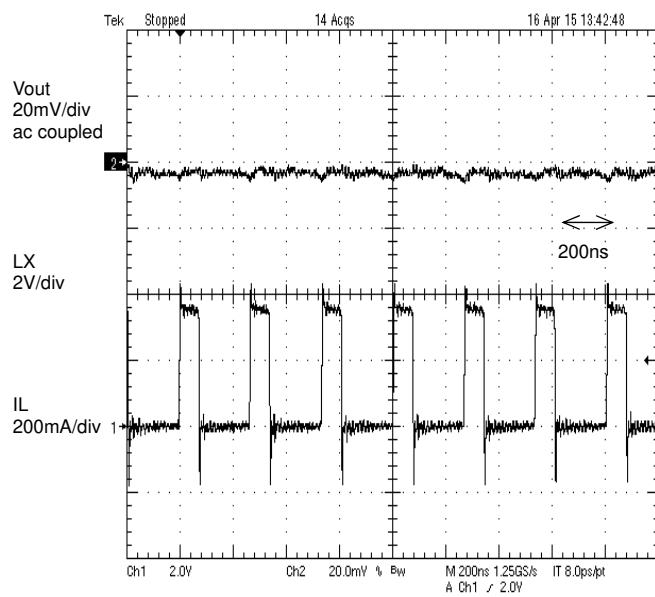


Figure 56. PWM mode Operation lout=100mA

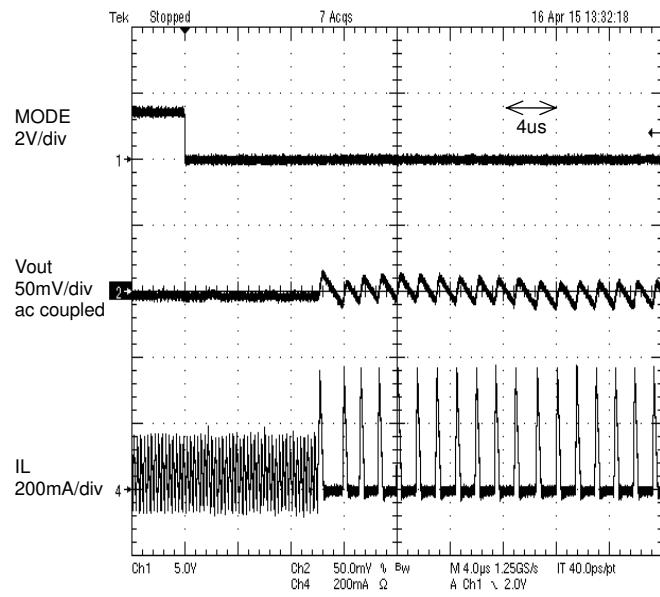


Figure 57. Mode Change Response
MODE : High to Low

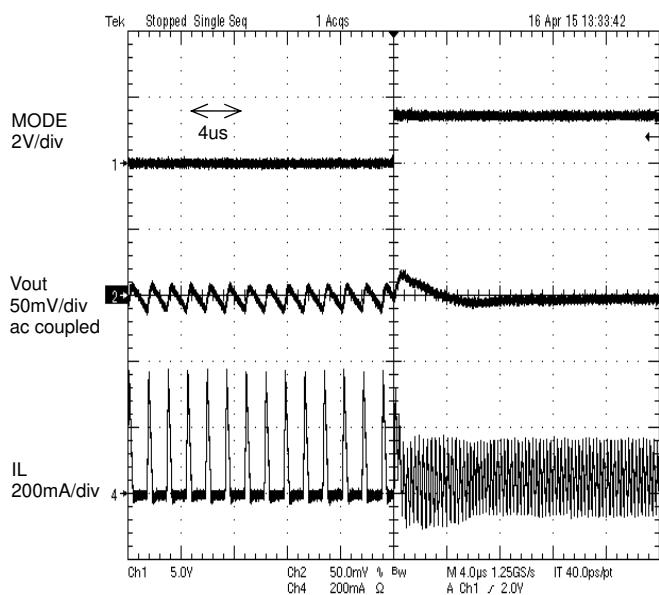


Figure 58. Mode Change Response
MODE : Low to High

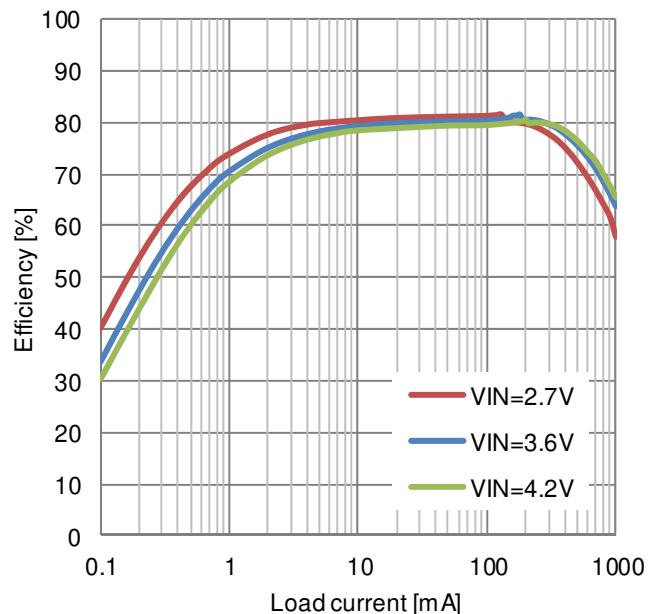


Figure 59. Efficiency vs Load current
PFM mode

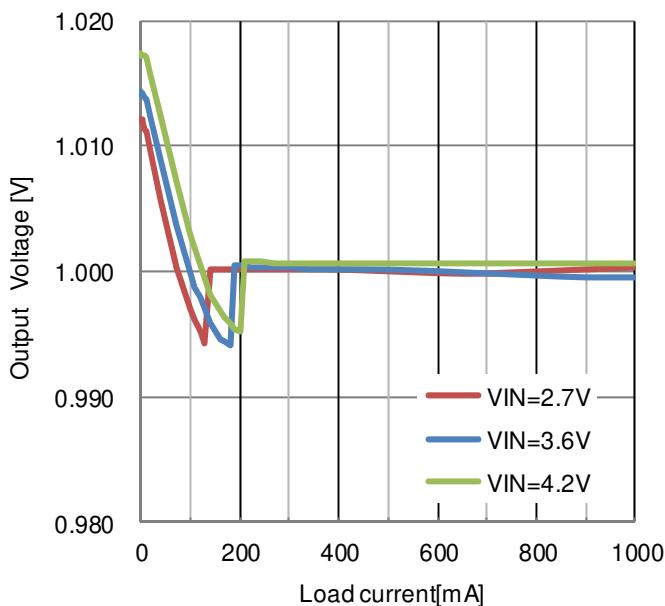


Figure 60. Efficiency vs Load current
PWM mode

● Electrical characteristic curves (Reference data)
BU90009GWZ (1.300V OUTPUT)

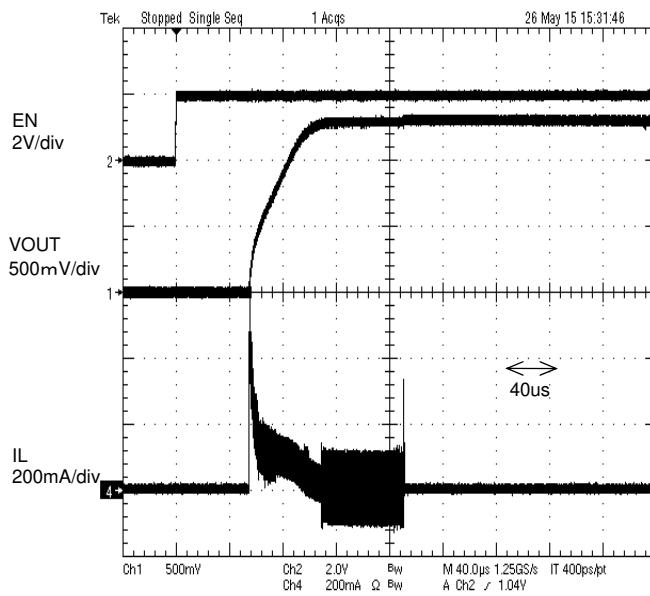


Figure 61. Start up

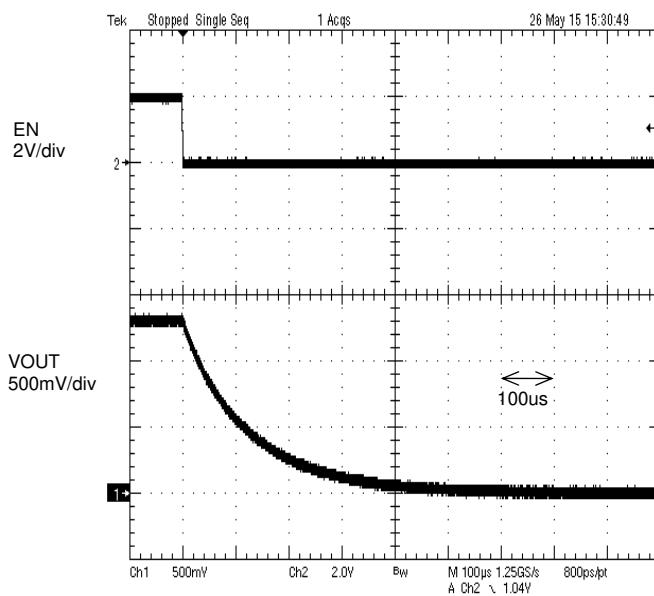
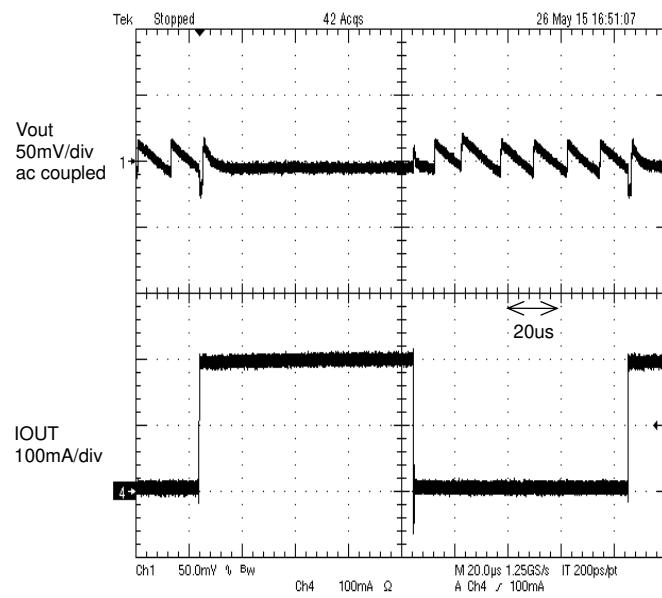
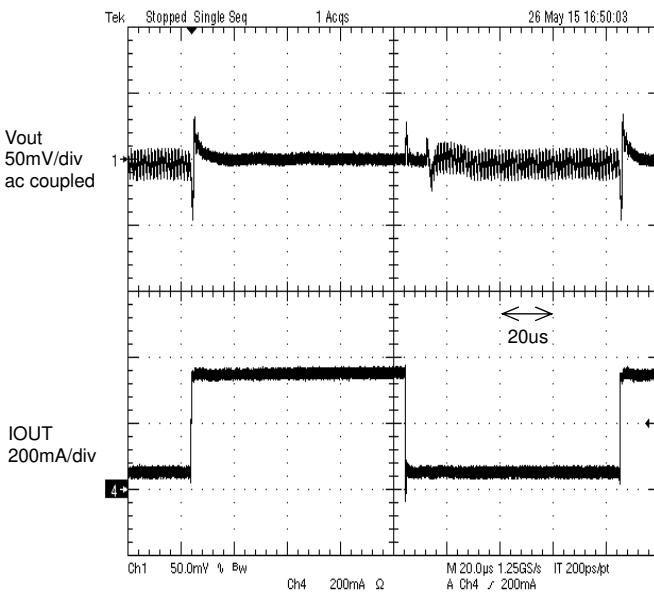


Figure 62. Shut down

Figure 63. Load transient response 5mA to 50mA
 $t_r=t_f=100\text{ns}$, MODE : LowFigure 64. Load transient response 50mA to 350mA
 $t_r=t_f=100\text{ns}$, MODE : Low

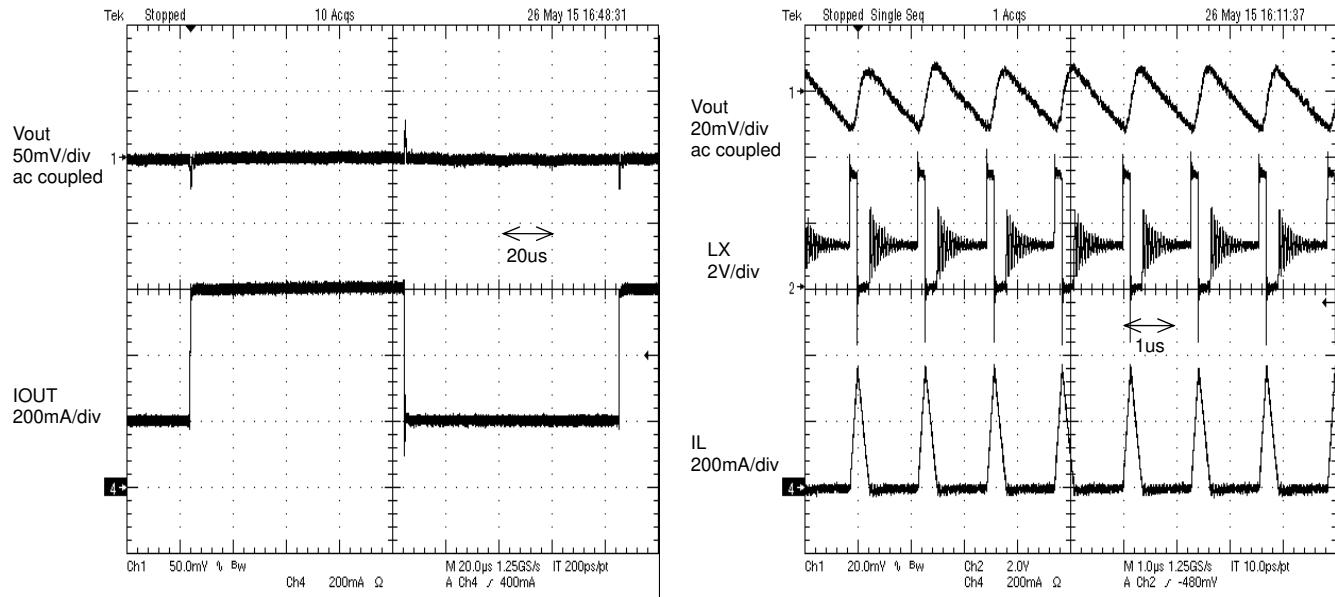


Figure 65. Load transient response 150mA to 500mA
tr=tf=100ns, MODE : High

Figure 66. PFM mode Operation
Iout=50mA

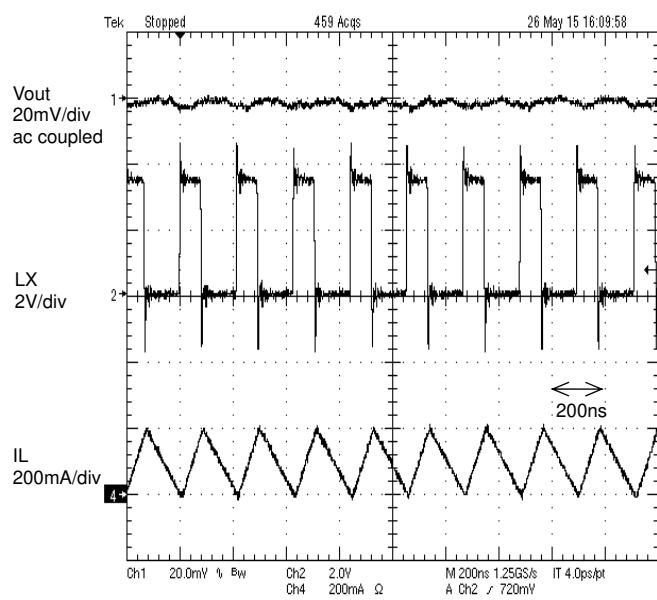


Figure 67. PWM mode Operation Iout=100mA

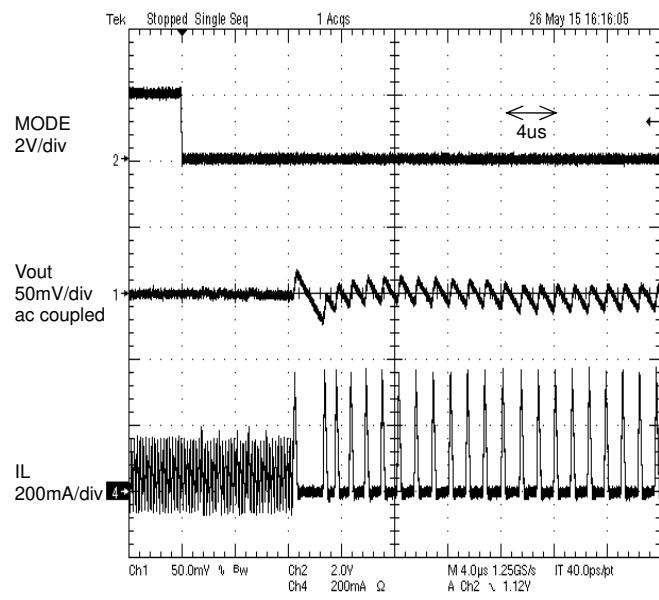


Figure 68. Mode Change Response
MODE : High to Low

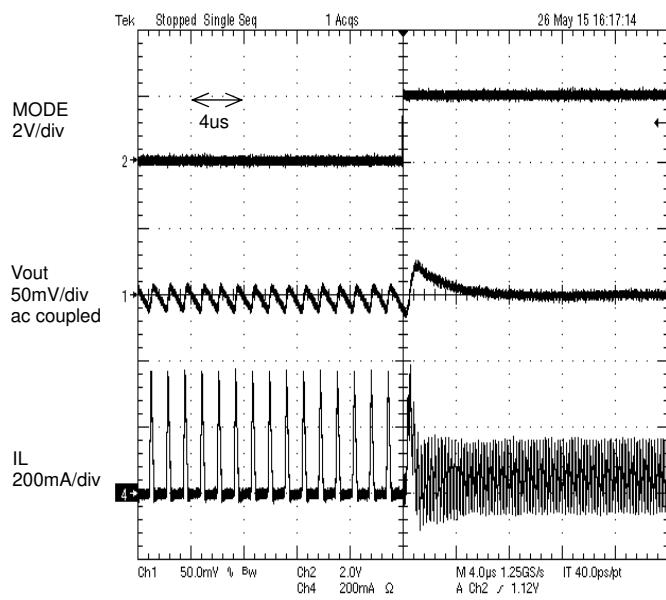


Figure 69. Mode Change Response
MODE : Low to High

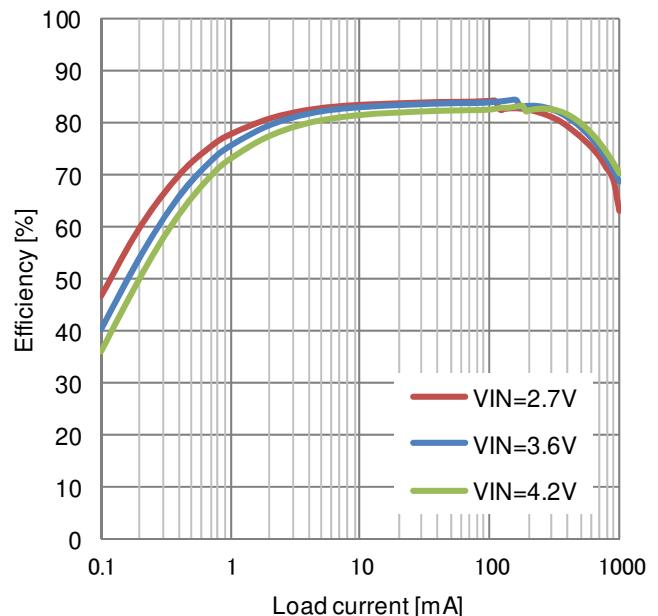


Figure 70. Efficiency vs Load current
PWM/PFM Auto mode

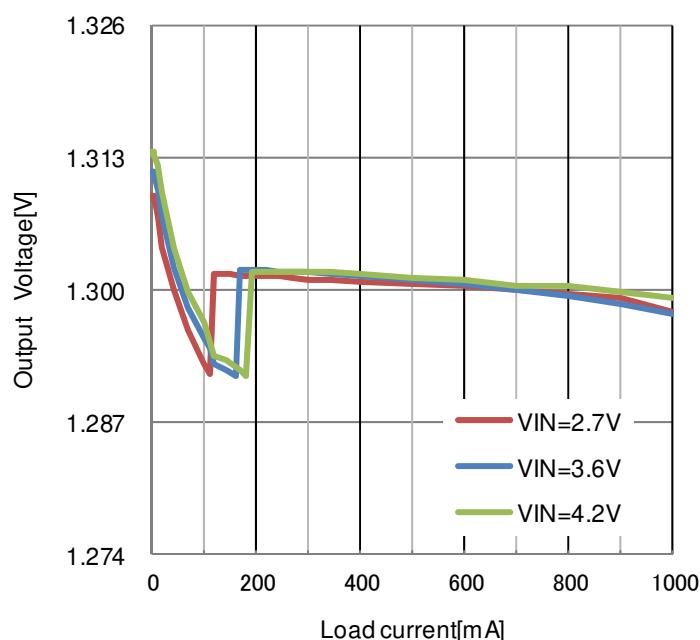


Figure 71. Load regulation
PWM/PFM Auto mode

●PC Board layout

The suggested PCB layout for the BU9000xGWZ are shown in Figure. The following guidelines should be used to ensure a proper layout.

- 1) The input capacitor CIN should be connect as closely possible to VIN pin and GND pin.
- 2) From the output voltage to the FB pin line should be as separate as possible.
- 3) COUT and L should be connected as closely as possible. The connection of L to the LX pin should be as short as possible.

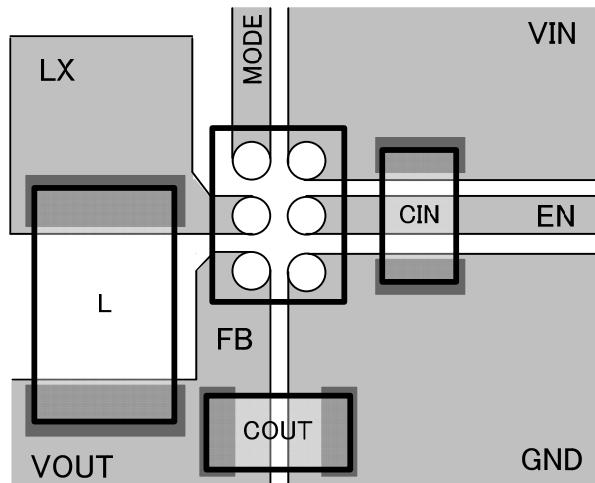


Figure 72. PCB layout

●External parts selection

Inductor selection

The inductance significantly depends on output ripple current. As shown by following equation, the ripple current decreases as the inductor and/or switching frequency increase.

$$\Delta I_L = \frac{(V_{IN}-V_{OUT}) \times V_{OUT}}{L \times V_{IN} \times f}$$

f: switching frequency L: inductance ΔI_L : inductor current ripple

As a minimum requirement, the DC current rating of the inductor should be equal to the maximum load current plus half of the inductor current ripple as shown by the following equation.

$$I_{LPEAK} = I_{OUTMAX} + \frac{\Delta I_L}{2}$$

1) Recommended inductor selection

- $I_{out} \leq 1A$

LQM2MPN1R0NG0 (2.0mm×1.6mm×1.0mm Murata)
MIPSZ2016D1R0FH (2.0mm×1.6mm×1.0mm FDK)
DFE252012C1R0 (2.5mm×2.0mm×1.2mm TOKO)

- $I_{out} \leq 0.6A$

LQM21PN1R0NGC (2.0mm×1.2mm×1.0mm Murata)
MIPSZ2012D1R0 (2.0mm×1.2mm×1.0mm FDK)
MIPSTZ1608D1R0 (1.6mm × 0.8mm × 0.8mm FDK)
MLP2012H1R0M (2.0mm×1.2mm×1.0mm TDK)
CKP2012N1R0N (2.0mm×1.2mm×1.0mm Taiyo Yuden)

2) Recommended input capacitor(CIN) selection

GRM155R60J225M(1.0mm × 0.5mm × 0.5mm Murata)
GRM155R60J475M(1.0mm × 0.5mm × 0.5mm Murata)
GRM155R60G106M(1.0mm × 0.5mm × 0.5mm Murata)

3) Recommended output capacitor(COUT) selection

GRM155R60J475M(1.0mm × 0.5mm × 0.5mm Murata)
GRM155R60G106M(1.0mm × 0.5mm × 0.5mm Murata)

○Cautions on the output capacitor selection

The BU9000xGWZ is designed to fixed soft-start time and operate with a maximum output capacitance of 10uF.
If the capacitance connected to the output is larger than 10uF, an overshoot of the output voltage will be caused.
It is possible to cause damage on the connected device.

●I/O equivalence circuit(s)