



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Title	<i>Engineering Prototype Report for EP48 – 1.4 W Non-Isolated Buck Converter Using LNK304P (LinkSwitch® -TN)</i>
Specification	85–265 VAC Input, 12 V, 120 mA, 1.44 W Output
Applications	Room Air Conditioners, White Goods, LED Lighting, and Other Applications Requiring a Non-Isolated Supply
Author	Power Integrations Applications Department
Document Number	EPR-48
Date	02-May-2005
Revision	1.1

Summary and Features

- Low cost, low component count solution (only 16 components)
- No optocoupler required
- Much higher output current than “reactive dropper” type power supplies
- High efficiency (>69% over full input voltage range)
- Less than 1 W input power with 0.5 W load
- Low no-load consumption (<0.2 W at 265 VAC)
- Fully protected against open-loop faults, output overload, short circuit and thermal overload
- Low-cost input stage meets EMI and surge requirements

The products and applications illustrated herein (including circuits external to the products and transformer construction) may be covered by one or more U.S. and foreign patents or potentially by pending U.S. and foreign patent applications assigned to Power Integrations. A complete list of Power Integrations' patents may be found at www.powerint.com.

Table Of Contents

1	Introduction	3
2	Power Supply Specification	4
3	Schematic	5
4	Circuit Description	5
4.1	Input Stage and EMI Filtering	5
4.2	<i>LinkSwitch-TN</i>	5
4.3	Output Rectification	6
4.4	Output Feedback	6
4.5	Operation Below Minimum Drain Voltage Specification	7
5	PCB Layout	7
6	Bill Of Materials	8
7	Performance Data	9
7.1	Efficiency	9
7.2	No-load Input Power	9
7.3	Regulation	10
7.3.1	Load	10
7.3.2	Line	10
8	Thermal Performance	11
9	Waveforms	12
9.1	Drain Voltage and Current, Normal Operation	12
9.2	Drain Voltage and Current Start-up Profile	12
9.3	Output Voltage Start-up Profile	13
9.4	Load Transient Response (75% to 100% Load Step)	13
9.5	Output Ripple Measurements	14
9.5.1	Ripple Measurement Technique	14
9.5.2	Measurement Results	15
10	Conducted EMI	16
11	Revision History	18

Important Note:

Although this board is designed to satisfy safety requirements, the engineering prototype has not been agency approved. In addition, as the output is not electrically isolated from the input, all testing should be performed using an isolation transformer to provide the AC line input to the prototype board.

1 Introduction

This document is an engineering report describing a non-isolated 12 V, 120 mA power supply utilizing a LNK304. This power supply is intended as a general purpose evaluation platform for *LinkSwitch-TN* in a buck converter configuration.

The document contains the power supply specification, schematic, bill of materials, printed circuit layout, and performance data.

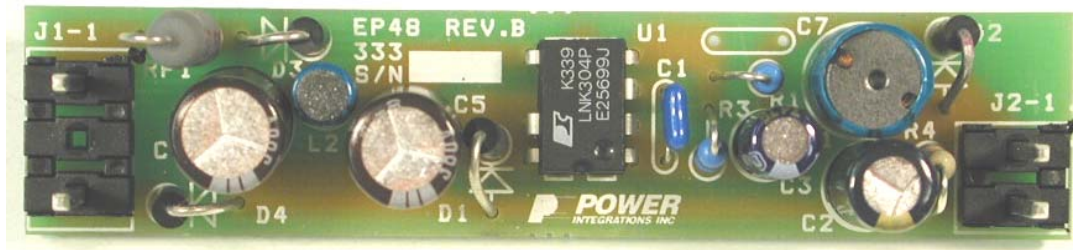


Figure 1 – EP48 Populated Circuit Board Photograph.

2 Power Supply Specification

Description	Symbol	Min	Typ	Max	Units	Comment
Input						
Voltage	V_{IN}	85		265	VAC	2 Wire – No Protective Earth
Frequency	f_{LINE}	47	50/60	64	Hz	
No-load Input Power (230 VAC)				0.3	W	
Output						
Output Voltage 1	V_{OUT}	10.8	12.0	13.2	V	±10% 20 MHz Bandwidth 3.5 mA pre-load fitted on board
Output Ripple Voltage 1	$V_{RIPPLE1}$			120	mV	
Output Current 1	I_{OUT}	0		120	mA	
Total Output Power						
Continuous Output Power	P_{OUT}		1.44		W	0.5 W output load
Standby Input Power	$P_{IN(S/B)}$			1	W	
Efficiency	η	70			%	Measured at 85 VAC, 25 °C
Environmental						
Conducted EMI		Meets CISPR22B / EN55022B				> 6 dB Margin
Surge		4			kV	1.2/50 μ s surge, IEC 1000-4-5, Series Impedance: Differential Mode 2 Ω Common Mode: 12 Ω
Ambient Temperature	T_{AMB}	-20		50/85	°C	Free convection, sea level. For operation at >70 °C substitute D1 for a diode with $t_{rr} \leq 35$ ns

Table 1 - EP48 Specifications

3 Schematic

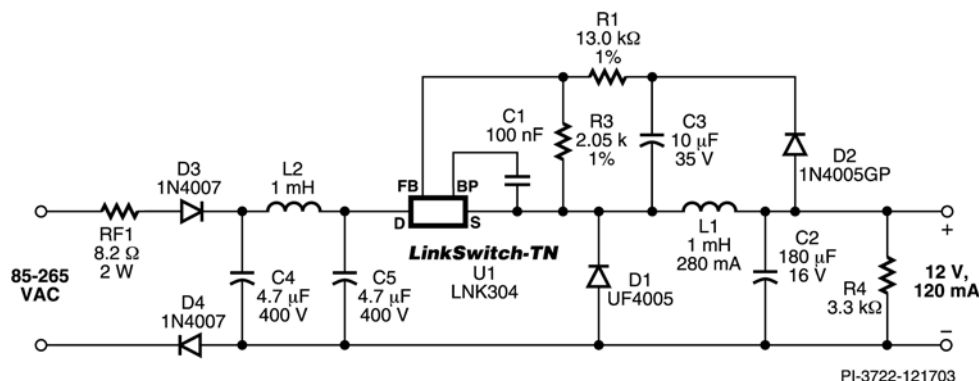


Figure 2 – EP48 Schematic.

4 Circuit Description

4.1 Input Stage and EMI Filtering

The input stage is comprised of fusible resistor RF1, diodes D3 and D4, capacitors C4 and C5, and inductor L2. Two diodes are used to both increase the surge withstand to 2 kV and provide EMI gating (noise current only flows when the diodes conduct). Placing D3 and D4 directly in series would meet the surge requirements, but without EMI gating, conducted EMI on the neutral line would be higher.

Resistor RF1 is a flameproof, fusible, wire wound resistor. It accomplishes several functions: (a) limits inrush current to safe levels for rectifiers D3 and D4, (b) provides differential mode noise attenuation and (c) acts as an input fuse in the event any other component fails short circuit. As this component is used as a fuse, it should fail safely open circuit without emitting smoke, fire or incandescent material to meet typical safety requirements. To withstand the instantaneous inrush power dissipation, wire wound types are recommended. Metal film resistors are not recommended.

4.2 LinkSwitch-TN

LinkSwitch-TN integrates a 700 V power MOSFET and control circuitry into a single low cost IC. The internal fixed switching frequency of 66 kHz was selected to allow up to 120 mA of output current using a standard 1 mH inductor. Lower frequencies require higher value, more costly inductors while higher frequencies increase EMI and cause undesirable high di/dt values as the inductor value reduces.

The device is completely self-powered from the DRAIN pin with local supply decoupling provided by a small 100 nF capacitor connected to the BYPASS pin.

Here, the device is configured in a buck converter. The supply is designed to operate in mostly discontinuous conduction mode (MDCM), with the peak L1 inductor current set by the LNK304P internal current limit. The control scheme used is similar to the ON/OFF control used in *TinySwitch*[®]. The on-time for each switching cycle is set by the inductance value of L1, *LinkSwitch-TN* current limit and the high voltage DC input bus across C5.

Output regulation is accomplished by skipping switching cycles in response to an ON/OFF feedback signal applied to the FEEDBACK (FB) pin. This differs significantly from traditional PWM schemes that control the duty factor (duty cycle) of each switching cycle.

Unlike *TinySwitch*, the logic of the FB pin has been inverted in *LinkSwitch-TN*. This allows a very simple feedback scheme to be used when the device is used in the buck converter configuration. Current into the FB pin greater than 49 μ A will inhibit the switching of the internal MOSFET, while current below this allows switching cycles to occur.

In the event of a fault condition such as output overload, output short circuit, or an open loop condition, *LinkSwitch-TN* enters into auto-restart operation. If no feedback is received for >50 ms, the internal MOSFET is disabled for 800 ms and auto-restart alternately enables and disables the switching of the power MOSFET until the fault condition is removed and feedback is received.

4.3 Output Rectification

During the ON time of U1, current ramps in L1 and is simultaneously delivered to the load. During the OFF time the inductor current ramps down via free-wheeling diode D1 into C2 and is delivered to the load. Diode D1 should be selected as an ultra-fast diode ($t_{rr} \leq 50$ ns) with a voltage rating greater than the maximum DC voltage across C5, 600 V in this case. In designs that operate in continuous conduction mode, t_{rr} of ≤ 35 ns is recommended. Capacitor C2 should be selected to have an adequate ripple current rating (low ESR type).

4.4 Output Feedback

The voltage across L1 is rectified and smoothed by D1 and C2 during the off-time of U1. To a first order, the forward voltage drops of D1 and D2 are identical and therefore, the voltage across C3 tracks the output voltage. To provide a feedback signal, the voltage developed across C3 is divided by R1 and R3 and connected to U1's FB pin. The values of R1 and R3 are selected such that at the nominal output voltage, the voltage on the FB pin is 1.65 V. This voltage is specified for U1 at an FB current of 49 μ A with a tolerance of +/-7% over a temperature range of -40 to 125 °C. This allows this simple feedback to meet the required overall output tolerance of +/-10% at rated output current.

Operation down to 0 mA output current can be accomplished while still meeting +/-10% by increasing the size of the preload from 3.5 mA to 5 mA.

4.5 Operation Below Minimum Drain Voltage Specification

In certain abnormal conditions, the drain voltage can drop below the minimum drain voltage specification of 50 V. If these conditions exist in combination with very light output loading (<5 mA), it is possible for the output voltage to go out of regulation.

These abnormal conditions can exist, for example, during a brownout condition when the input voltage can drop to <30 VAC. To avoid the output voltage exceeding acceptable levels under these conditions, the output of the power supply has to either be pre-loaded with 5 mA or the output has to be clamped with an appropriate Zener diode (e.g. 15 V, 1.3 W device).

5 PCB Layout

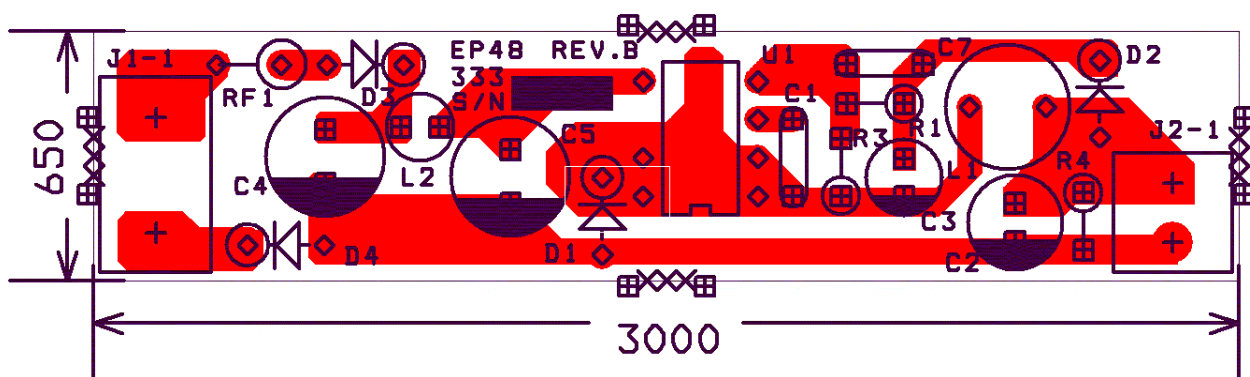


Figure 3 – EP48 Printed Circuit Layout (Dimension 0.001 Inches).

6 Bill Of Materials

Item	Qty	Reference	Description	P/N	Manufacturer
1	2	C4, C5	4.7 μ F, 400 V, 8mm x 11 mm	380VB4R7M8X11LL	UCC
2	1	C1	0.1 μ F, 50 V, ceramic	ECU-S1H104KBB	Panasonic
3	1	C3	10 μ F, 35 V general purpose	ECA-1VM100	Panasonic
4	1	C2	180 μ F, 16 V, low ESR 250 m Ω , 400 mA	EEU-FC1C181	Panasonic
5	2	D3, D4	1 A, 1000 V, plastic rectifier	1N4007	Diodes Inc (or Generic)
6	1	D1	1 A, 600 V, Ultra Fast ($t_{rr} \leq 50$ ns)	UF4005	General Semiconductor (or Generic)
7	1	D2	1A, 600 V, glass passivated rectifier ($t_{rr} = 2$ μ s)	1N4005GP	General Semiconductor (or Generic)
8	1	L1	1 mH inductor 0.28 A	SBC3-102-281	Tokin
9	1	L2	1 mH inductor 0.21 A	SBC1-102-211	Tokin
10	1	R3	2.05 k Ω , 0.25 W, 1%	MFR-25FBBF-2K05	Yageo (or generic)
11	1	R1	13.0 k Ω , 0.25 W, 1%	MFR-25FBBF-13K	Yageo (or generic)
12	1	R4	3.3 k Ω , 0.25 W, 5%	CFR-25JB-3K3	Yageo (or generic)
13	1	RF1	8.2 Ω wire wound fusible, 2 W	CRF0414-253-4 8R2	VTM
14	1	U1	<i>LinkSwitch-TN</i>	LNK304P	Power Integrations
15	1	J1	3-pin connector (center pin removed)	26-48-1031	Molex
16	1	J2	2-pin connector	26-48-1021	Molex

7 Performance Data

All measurements performed at room temperature, 60 Hz input frequency.

7.1 Efficiency

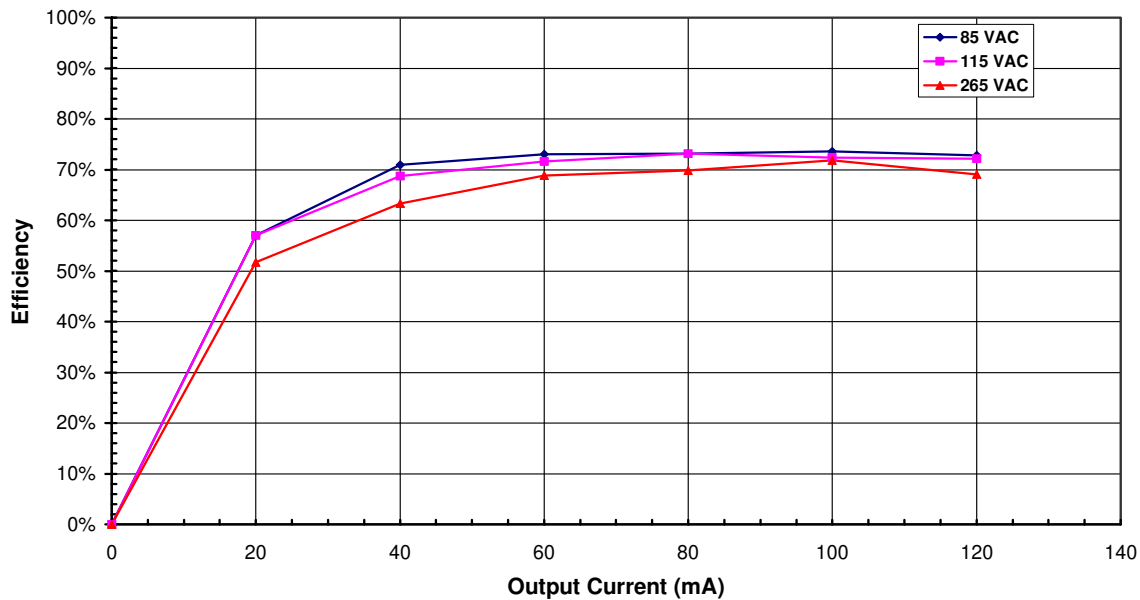


Figure 4 - Efficiency vs. Output Current, Room Temperature, 60 Hz.

7.2 No-load Input Power

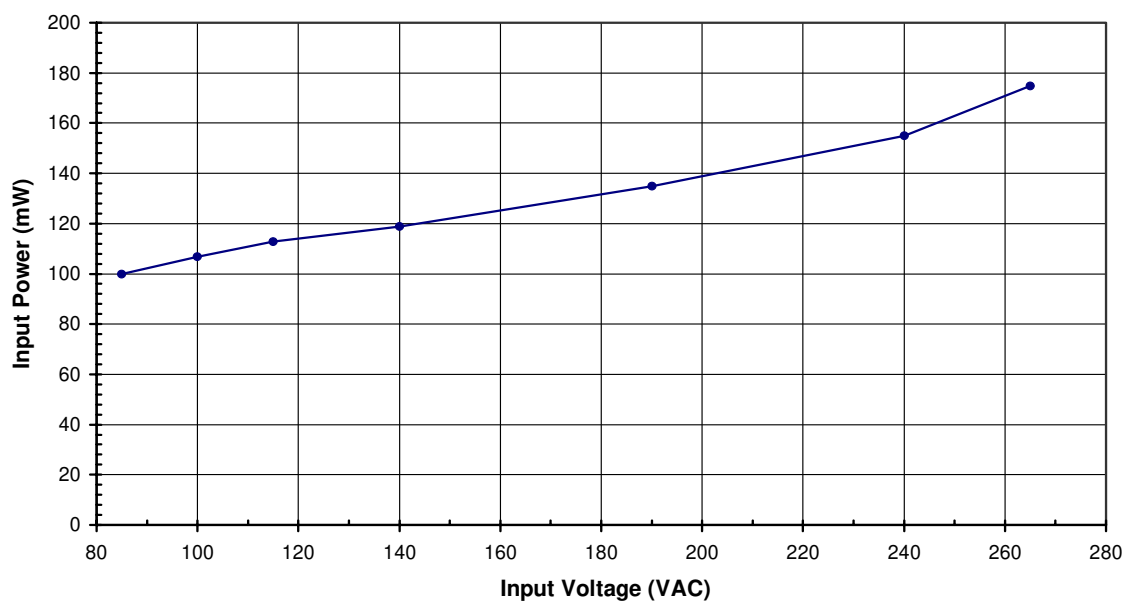


Figure 5 - Zero Load Input Power vs. Input Line Voltage, Room Temperature, 60 Hz.

7.3 Regulation

7.3.1 Load

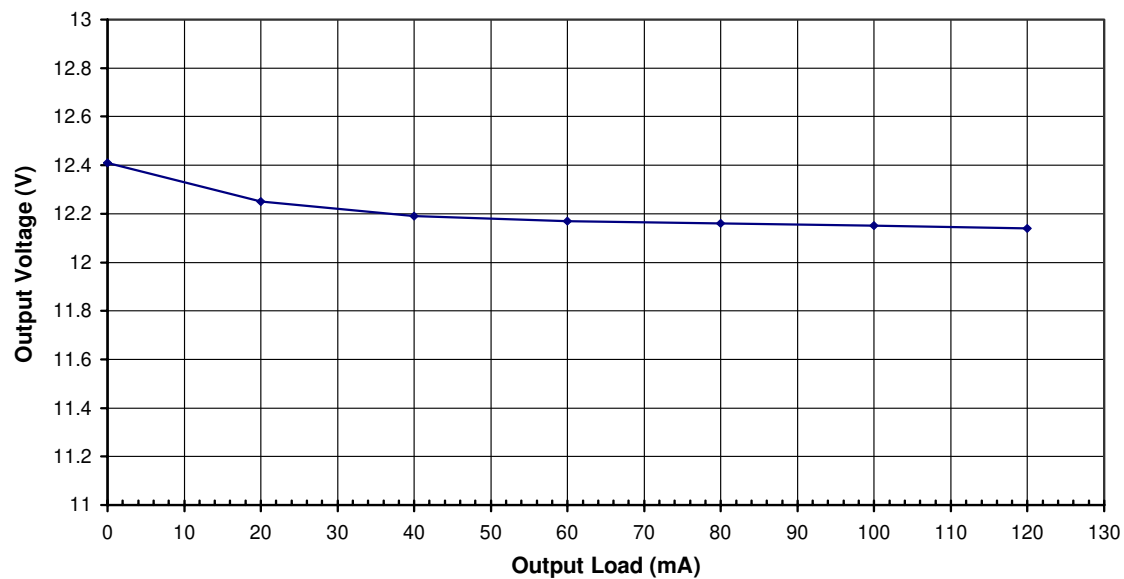


Figure 6 - Load Regulation, Room Temperature.

7.3.2 Line

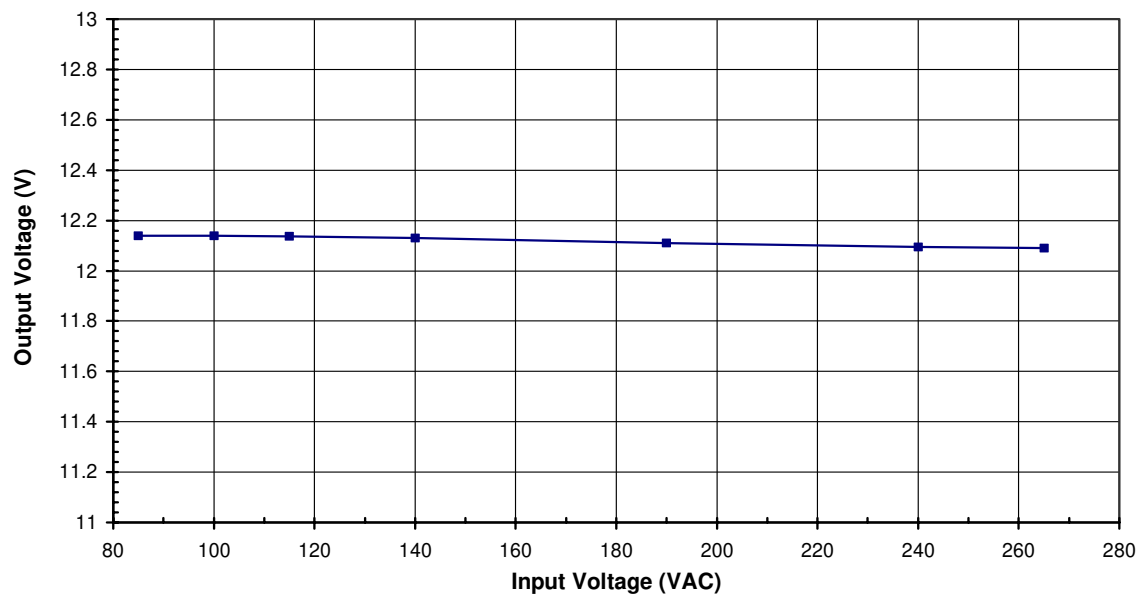


Figure 7 - Line Regulation, Room Temperature, Full Load.

7.4 Thermal Performance

To verify acceptable thermal performance, thermocouples were placed on key components on the board and the unit was placed into a thermal chamber. The ambient was raised to 85 °C with no air flow over the board. The unit was fully loaded and allowed to stabilize at three different line voltages, at which point temperature measurements were recorded.

In addition, a thermal image was taken of a unit painted matte black, operating at full load, 85 VAC and an ambient temperature of 23 °C.

These results show very acceptable temperature rise figures and show that the unit can operate in a very high ambient with sufficient margin to thermal shutdown.

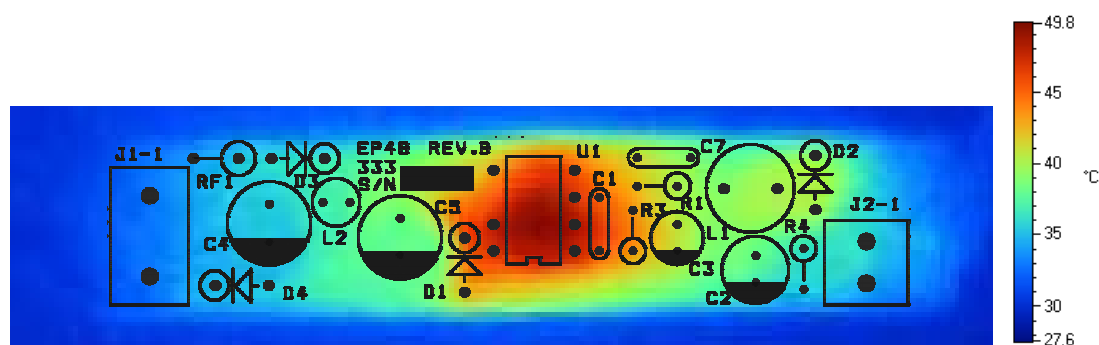


Figure 8 – Infrared Thermograph of EP48, 85 VAC Input, Full Load and 23 °C Ambient.

Temperature (°C)			
Item	90 VAC	115 VAC	240 VAC
Ambient	85	85	85
<i>LinkSwitch-TN</i> (U1)	112	112	106
Output Inductor (L1)	102	103	105
Freewheeling Diode (D1)	103	103	107
Input Capacitor (C5)	95	92	90
Output Capacitor (C2)	90	90	91

Table 2 - Temperature of Key Components, 85 VAC, Full Load, 85 °C Ambient.

8 Waveforms

8.1 Source Voltage and Current, Normal Operation

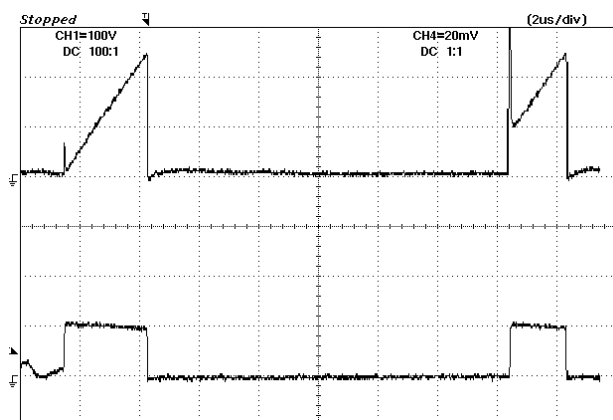


Figure 9 - 85 VAC, Full Load.
Upper: I_{DRAIN} , 0.1 A / div
Lower: V_{SOURCE} , 100 V, 2 μ s / div

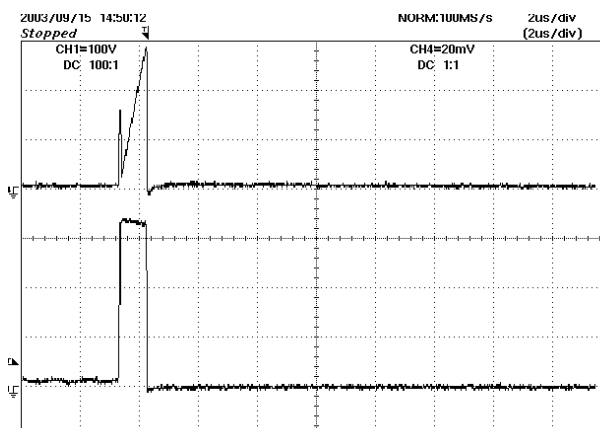


Figure 10 - 265 VAC, Full Load.
Upper: I_{DRAIN} , 0.1 A / div
Lower: V_{SOURCE} , 100 V / div

8.2 Source Voltage and Current Start-up Profile

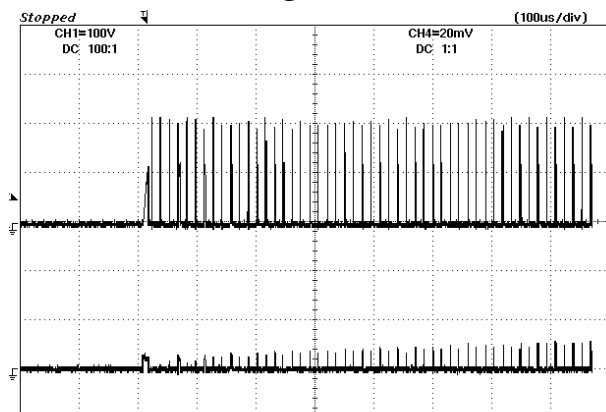


Figure 11 - 85 VAC Input and Maximum Load.
Upper: I_{DRAIN} , 0.1 A / div
Lower: V_{SOURCE} , 100 V & 1 ms / div

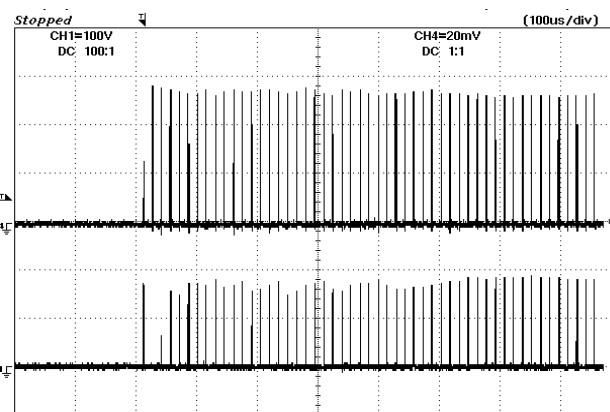


Figure 12 - 265 VAC Input and Maximum Load.
Upper: I_{DRAIN} , 0.1 A / div
Lower: V_{SOURCE} , 100 V & 1 ms / div

8.3 Output Voltage Start-up Profile

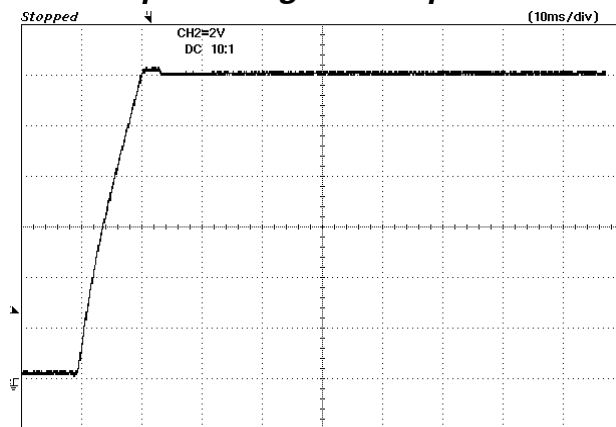


Figure 13 - 85 VAC Input and Maximum Load.
2 V / div, 10 ms

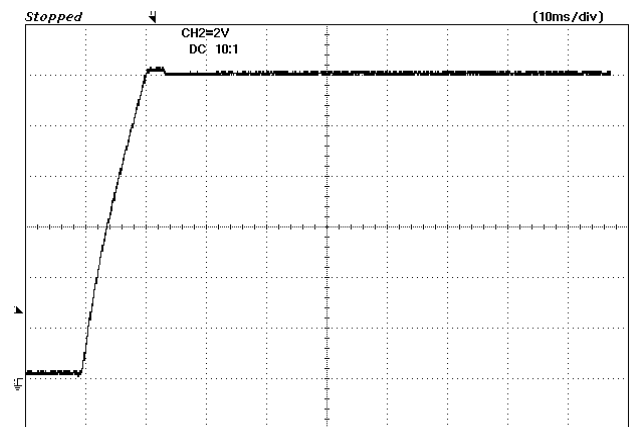


Figure 14 - 265 VAC Input and Maximum Load.
2 V / div, 10 ms

8.4 Load Transient Response (75% to 100% Load Step)

The oscilloscope was triggered using the load current step as a trigger source.

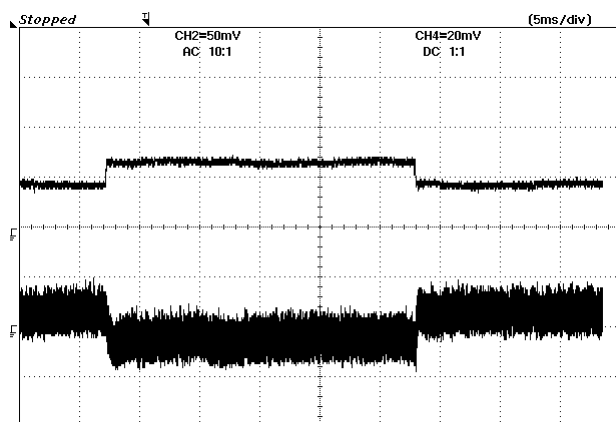


Figure 15 - 85 VAC Input and Maximum Load.
Upper: 100 mA / div
Lower: 50 mV / div, 5 ms / div

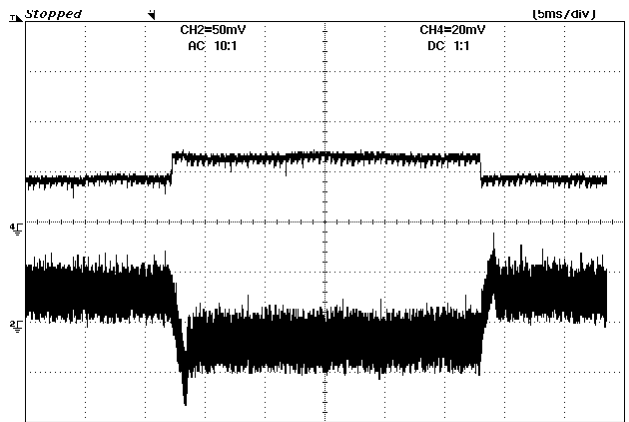


Figure 16 - 265 VAC Input and Maximum Load.
Upper: 100 mA / div
Lower: 50 mV / div, 5 ms / div

8.5 Output Ripple Measurements

8.5.1 Ripple Measurement Technique

For DC output ripple measurements, a modified oscilloscope test probe must be utilized in order to reduce spurious signals due to pickup. Details of the probe modification are provided in Figure 17 and Figure 18.

The 5125BA probe adapter is affixed with two capacitors tied in parallel across the probe tip. The capacitors include one (1) 0.1 μF /50 V ceramic type and one (1) 1.0 μF /50 V aluminum electrolytic. ***The aluminum electrolytic type capacitor is polarized, so proper polarity across DC outputs must be maintained (see below).***

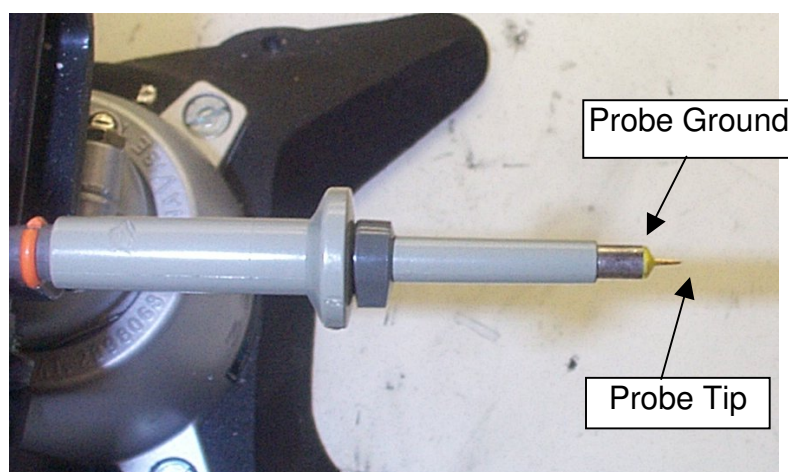


Figure 17 - Oscilloscope Probe Prepared for Ripple Measurement. (End Cap and Ground Lead Removed).



Figure 18 - Oscilloscope Probe with Probe Master 5125BA BNC Adapter (Modified with Wires for Probe Ground for Ripple Measurement and Two Parallel Decoupling Capacitors Added).

8.5.2 Measurement Results

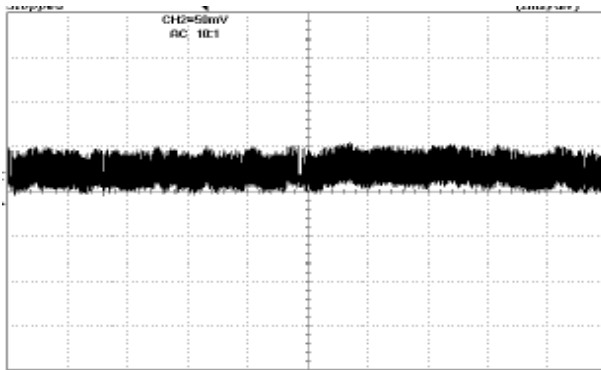


Figure 19 - Ripple, 85 VAC, Full Load.
2 ms, 50 mV / div

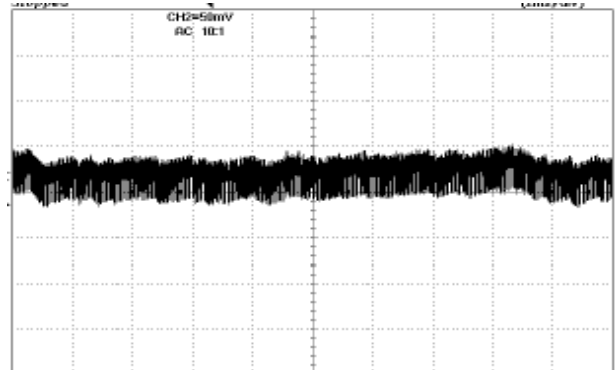


Figure 20 - 5 V Ripple, 115 VAC, Full Load.
2 ms, 50 mV / div

9 Conducted EMI

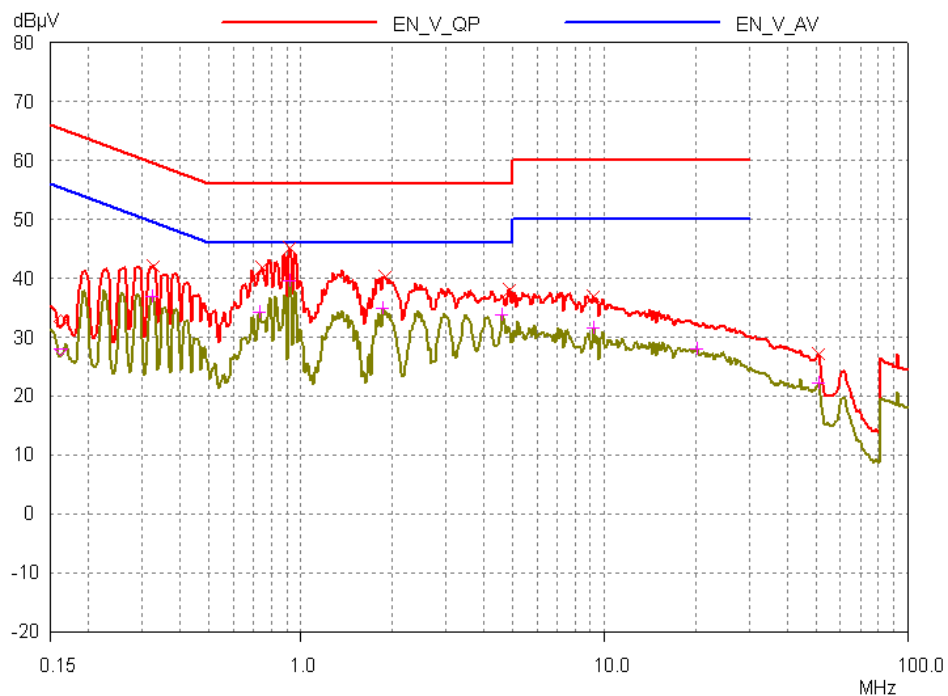


Figure 21 - Conducted EMI, 12 V Out, 120 mA, 115 VAC, 60 Hz, EN55022 B Limits, Neutral.

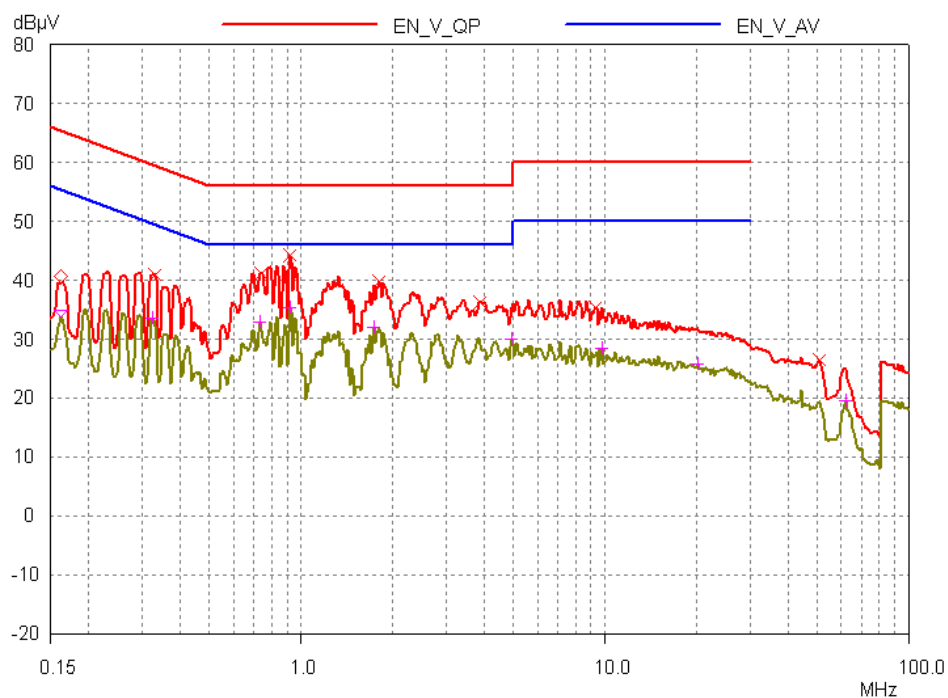


Figure 22 - Conducted EMI, 12 V Out, 120 mA, 115 VAC, 60 Hz, EN55022 B Limits, Line.

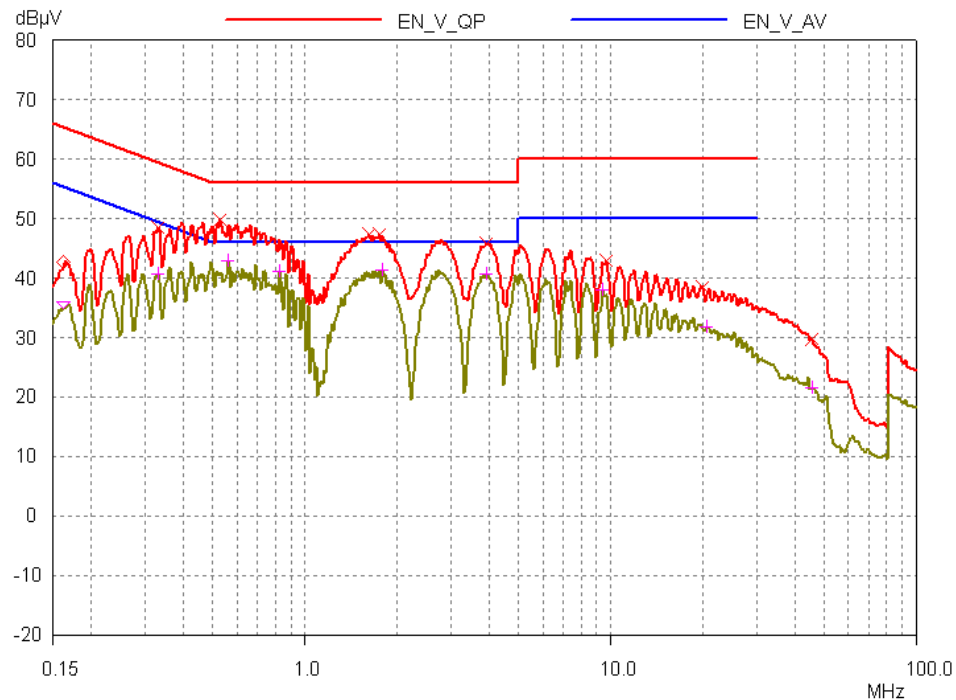


Figure 23 - Conducted EMI, 12 V Out, 120 mA, 230 VAC, 60 Hz, EN55022 B Limits, Neutral.

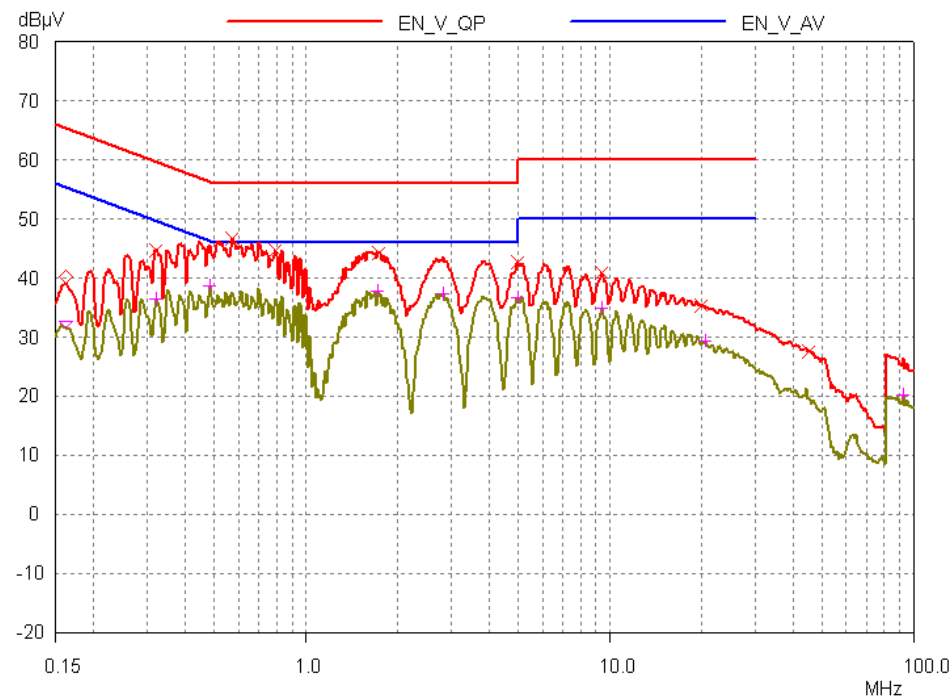


Figure 24 - Conducted EMI, 12 V Out, 120 mA, 230 VAC, 60 Hz, EN55022 B Limits, Line.

10 Revision History

Date	Author	Revision	Description & changes
16-Sept-03	AO	0.1	First Draft
17-Sept-03	PV	0.2	2 nd Draft
22-Sept-03	PV	0.3	3 rd Draft
20-Nov-03	AO	0.4	4 th Draft
22-Dec-03	PV	1.0	5 th Draft
02-May-05	SK	1.1	Corrected scales in Figures 10 and 12

NOTES

For the latest updates, visit our website: www.powerint.com

Power Integrations may make changes to its products at any time. Power Integrations has no liability arising from your use of any information, device or circuit described herein nor does it convey any license under its patent rights or the rights of others. POWER INTEGRATIONS MAKES NO WARRANTIES HEREIN AND SPECIFICALLY DISCLAIMS ALL WARRANTIES INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY RIGHTS.

PATENT INFORMATION

The products and applications illustrated herein (including circuits external to the products and transformer construction) may be covered by one or more U.S. and foreign patents or potentially by pending U.S. and foreign patent applications assigned to Power Integrations. A complete list of Power Integrations' patents may be found at www.powerint.com.

The PI Logo, **TOPSwitch**, **TinySwitch**, **LinkSwitch**, **DPA-Switch** and **EcoSmart** are registered trademarks of Power Integrations. **PI Expert** and **PI FACTS** are trademarks of Power Integrations. © Copyright 2005 Power Integrations.

Power Integrations Worldwide Sales Support Locations

WORLD HEADQUARTERS

5245 Hellyer Avenue,
San Jose, CA 95138, USA
Main: +1-408-414-9200
Customer Service:
Phone: +1-408-414-9665
Fax: +1-408-414-9765
e-mail: usasales@powerint.com

GERMANY

Rueckerstrasse 3
D-80336, Muenchen
Germany
Phone: +49-895-527-3910
Fax: +49-895-527-3920
e-mail: eurosales@powerint.com

JAPAN

1st Bldg Shin-Yokohama,
2-12-20 Kohoku-ku,
Yokohama-shi, Kanagawa
ken, Japan 222-0033
Phone: +81-45-471-1021
Fax: +81-45-471-3717
e-mail:
japansales@powerint.com

TAIWAN

5F-1, No. 316, Nei Hu Rd., Sec. 1
Nei Hu Dist.
Taipei, Taiwan 114, R.O.C.
Phone: +886-2-2659-4570
Fax: +886-2-2659-4550
e-mail:
taiwansales@powerint.com

CHINA (SHANGHAI)

Rm 807-808A, Pacheer
Commercial Centre,
555 Nanjing West Rd.
Shanghai, P.R.C. 200041
Phone: +86-21-6215-5548
Fax: +86-21-6215-2468
e-mail: chinasales@powerint.com

INDIA (TECHNICAL SUPPORT)

261/A, Ground Floor
7th Main, 17th Cross,
Sadashivanagar
Bangalore, India 560080
Phone: +91-80-5113-8020
Fax: +91-80-5113-8023
e-mail: indiasales@powerint.com

KOREA

RM 602, 6FL
Korea City Air Terminal B/D,
159-6
Samsung-Dong, Kangnam-Gu,
Seoul, 135-728, Korea
Phone: +82-2-2016-6610
Fax: +82-2-2016-6630
e-mail:
koreasales@powerint.com

UK (EUROPE & AFRICA HEADQUARTERS)

1st Floor, St. James's House
East Street, Fernham
Surrey, GU9 7TJ
United Kingdom
Phone: +44 (0) 1252-730-140
Fax: +44 (0) 1252-727-689
e-mail: eurosales@powerint.com

CHINA (SHENZHEN)

Room 2206-2207, Block A,
Elec. Sci. Tech. Bldg
2070 Shennan Zhong Rd
Shenzhen, Guangdong,
China, 518031
Phone: +86-755-8379-3243
Fax: +86-755-8379-5828
e-mail: chinasales@powerint.com

ITALY

Via Vittorio Veneto 12
20091 Bresso MI
Italy
Phone: +39-028-928-6000
Fax: +39-028-928-6009
e-mail: eurosales@powerint.com

SINGAPORE

51 Newton Road,
#15-08/10 Goldhill Plaza,
Singapore, 308900
Phone: +65-6358-2160
Fax: +65-6358-2015
e-mail:
singaporesales@powerint.com

APPLICATIONS HOTLINE

World Wide +1-408-414-9660

APPLICATIONS FAX

World Wide +1-408-414-9760



Power Integrations

Tel: +1 408 414 9200 Fax: +1 408 414 9201
www.powerint.com