



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**LT6350CMS8**

 Low Noise Single-Ended to Differential Amplifier  
 SAR ADC Driver

**DESCRIPTION**

Demonstration Circuit 1538A supports the LT6350, a Low Noise Single Ended to Differential Amplifier / SAR ADC Driver. The LT6350 contains an un-dedicated open-loop “Opamp1”, and a dedicated inverting “Opamp2” in a gain of -1. Opamp1 has Rail to Rail inputs and output. Opamp2 has a Rail to Rail output. See Figure 1.


**Design files for this circuit board are available. Call the LTC factory.**

LT, are registered trademarks of Linear Technology Corporation. Other product names may be trademarks of the companies that manufacture the products.

**PERFORMANCE SUMMARY** Specifications are typical at  $T_A = 25^\circ\text{C}$ ,  $V_S = \pm 5\text{V}$ 

SYMBOL	PARAMETER	CONDITIONS, COMMENTS	TYP	UNITS
$V_S$	Supply Voltage Range	Single Supply	2.7V to 12V	V
		Split Supply	+/-1.35V to +/-6V	V
$V_{cm}$	Input Voltage Range	Op Amp 1	Rail to Rail	V
		Op Amp 2	$V_{S-} + 1.5\text{V}$ to $V_{S+} - 0.1\text{V}$	V
BW	-3dB Bandwidth	Small signal, differential output	33	MHz
$V_{out}$	Output Voltage Swing	Each output, to either rail, no load	55	mV
$I_{CC}$	Supply Current	$V_S = \pm 5\text{V}$	4.8	mA

Figure 1. LT6350 Block Diagram . Opamp1 is an undedicated low noise opamp. Opamp2 is a dedicated inverter.

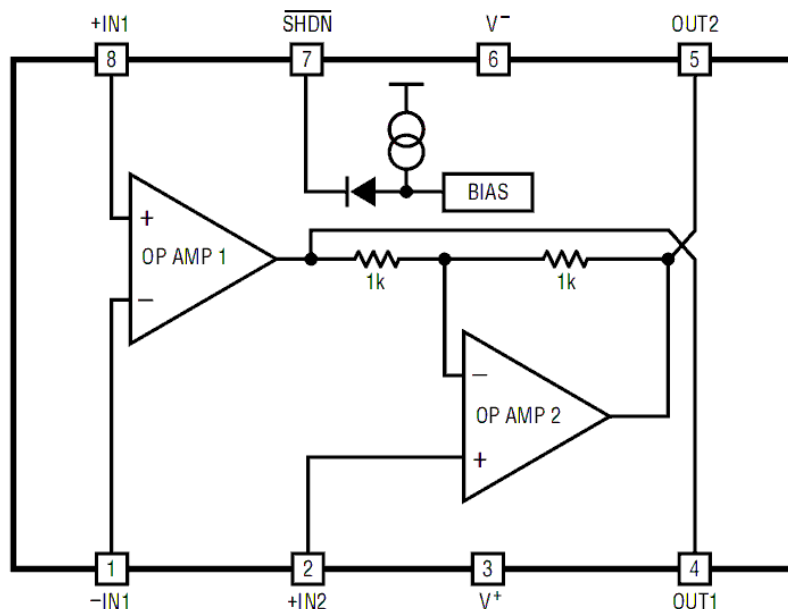

## OPERATING PRINCIPLES

Conversion of single ended signals to differential is a basic function. It may be desired for improved transmission characteristics over twisted pair, or for driving SAR ADCs which prefer differential inputs. The LT6350 makes the single-ended to conversion easy by providing

an already connected internal inverter, Opamp2. In the simplest configuration, with Opamp1 in a gain of 1, the conversion to differential causes an effective gain of 2 overall.

## QUICK START PROCEDURE

Demonstration circuit 1538 is shipped with the jumpers set for Single Supply, DC coupled operation, with Opamp1 configured in a gain of 1 (OUT1 shorted to -IN1). As the intended application is for single ended inputs, only one input BNC connector is installed (J1) and this is the excitation path for Opamp1's non-inverting input +IN1. To support Opamp1 in inverting or other applications, a footprint for another BNC was included (J3) for user installation.

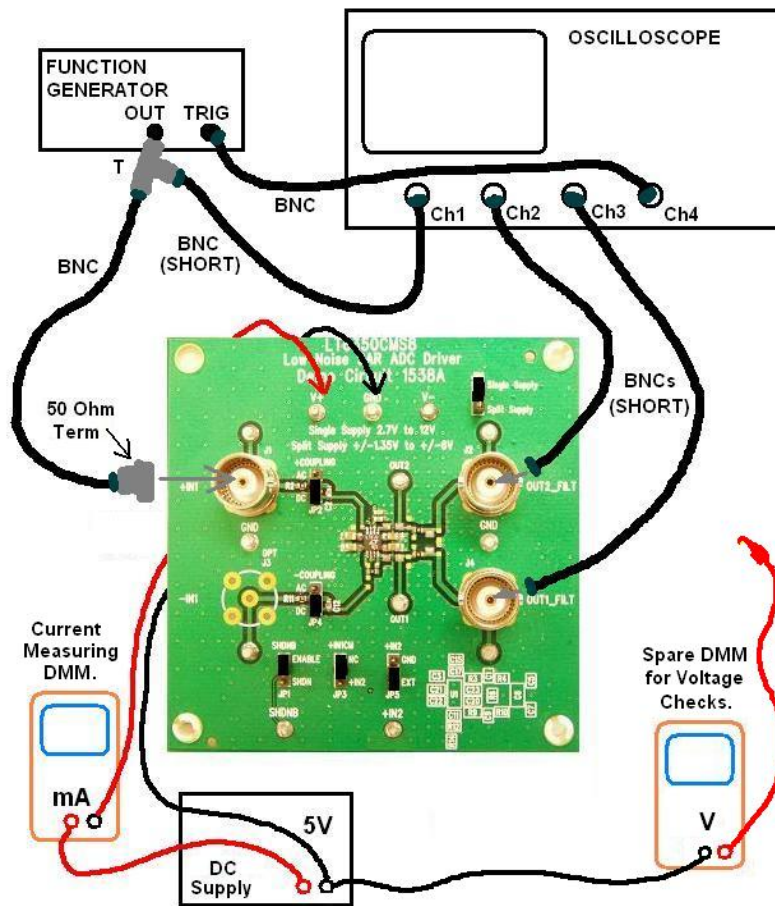


Figure 2. Proper Connections for Single Supply Operation (DMMs optional). The function generator should be set up to operate around a positive 2V DC offset. For split supply operation, set JP6 to "Split Supply" and connect a negative supply to the V- turret.

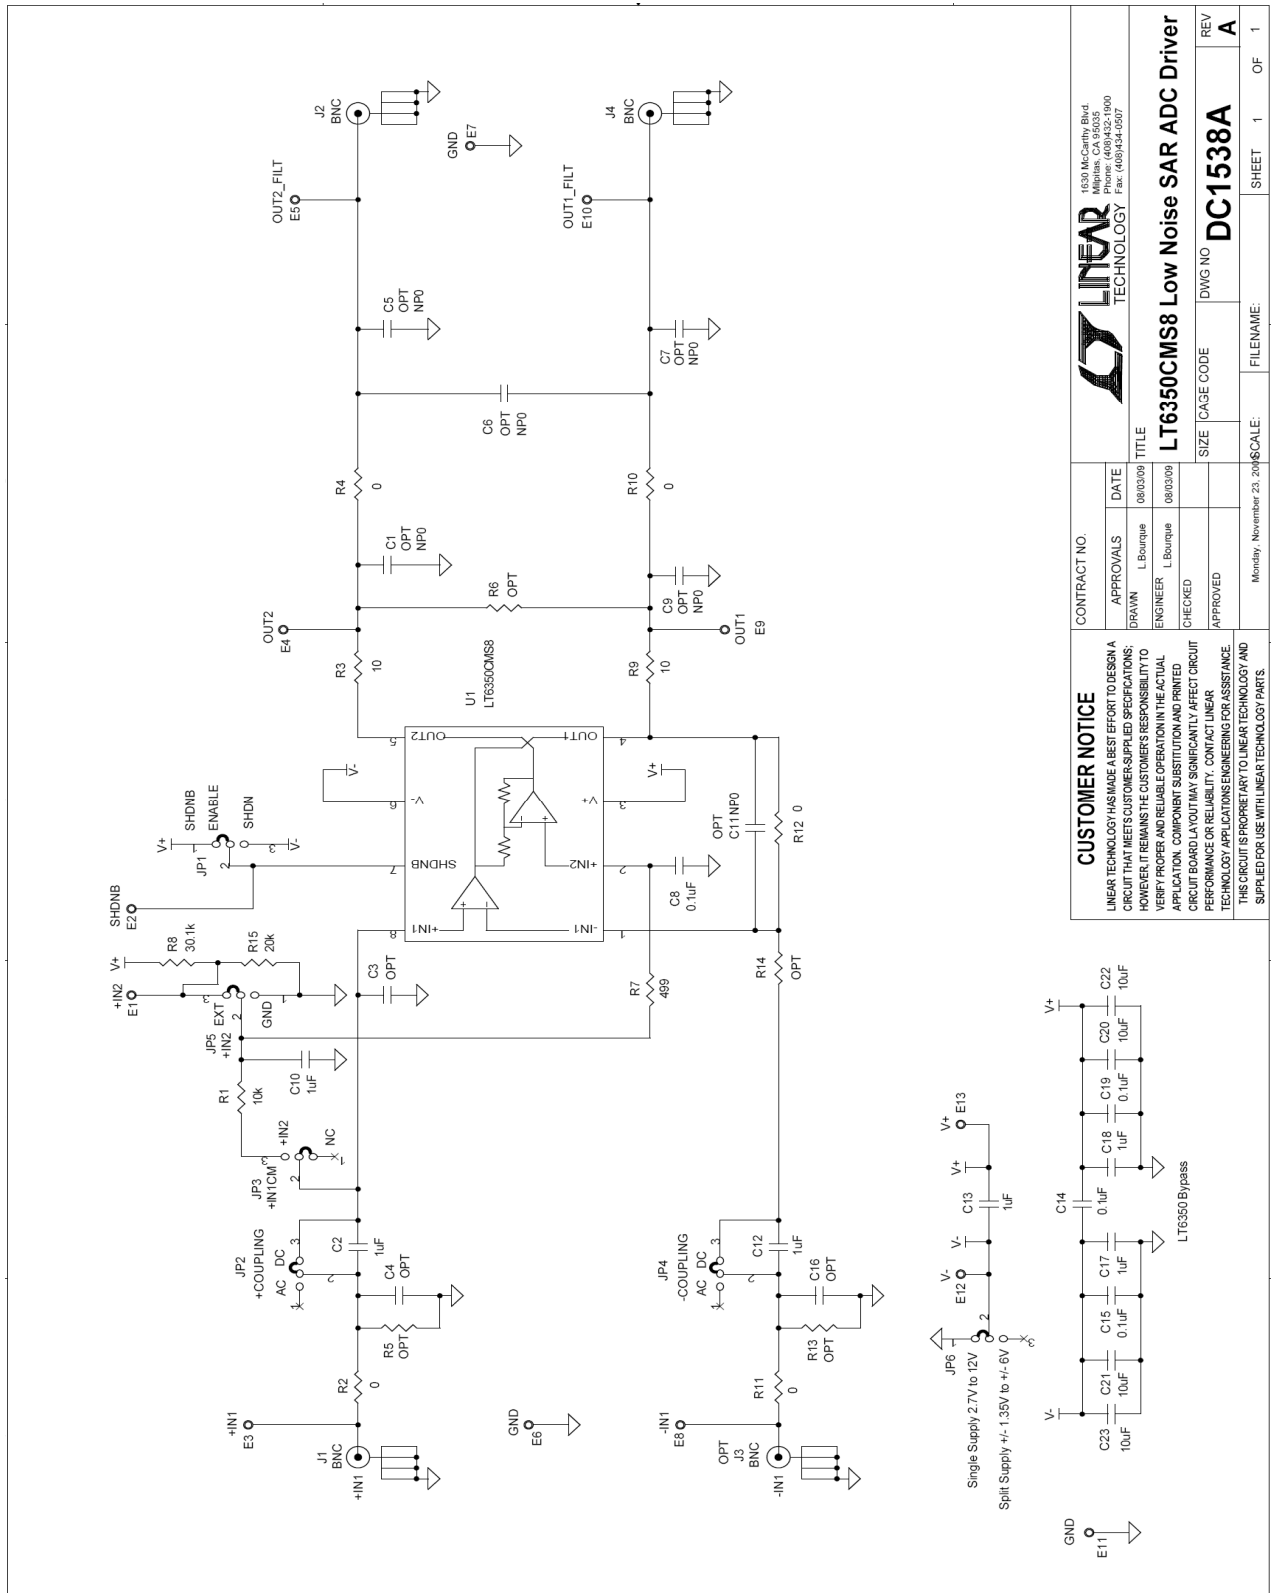


Figure 3. Circuit Schematic

Item	Qty	Ref - Des	Part Description	Manufacturer, Part #
<b>REQUIRED CIRCUIT COMPONENTS:</b>				
1	6	C2,C10,C12,C13,C17,C18	CAP., X7R, 1uF, 16V, 10% 0603	AVX, 0603YC105KAT2A
2	4	C8,C14,C15,C19	CAP., X7R, 0.1uF, 25V, 10% 0603	AVX, 06033C104KAT2A
3	4	C20,C21,C22,C23	CAP., X5R,10uF, 16V, 10% 0805	MURATA,GRM21BR61C106KE15L
4	1	R1	RES., CHIP, 10K, 1/10W, 1% 0603	VISHAY, CRCW060310K0FKEA
5	5	R2,R4,R10,R11,R12	RES., CHIP, 0, 1/10W, 0603	VISHAY, CRCW06030000Z0EA
6	2	R3,R9	RES., CHIP, 10, 1/10W, 1% 0603	VISHAY, CRCW060310R0FKEA
7	1	R7	RES., CHIP, 499, 1/10W, 1% 0603	VISHAY, CRCW0603499RFKEA
8	1	R8	RES., CHIP, 30.1K, 1/10W, 1% 0603	VISHAY, CRCW060330K1FKEA
9	1	R15	RES., CHIP, 20K, 1/10W, 1% 0603	VISHAY, CRCW060320K0FKEA
10	1	U1	Low Noise SAR ADC Driver	Linear Tech., LT6350CMS8#TRPBF
<b>ADDITIONAL DEMO BOARD CIRCUIT COMPONENTS:</b>				
1	5	C1,C5,C7,C9,C11 (opt.)	CAP., 0603, NP0	
2	1	C3 (opt.)	CAP., 0603	
3	3	C4,C6,C16 (opt.)	CAP., 1206, NP0	
4	2	R5,R13 (opt.)	RES., 1206	
5	2	R6,R14 (opt.)	RES., 0603	
<b>HARDWARE</b>				
1	13	E1-E13	TESTPOINT, TURRET, .065" pbf	MILL-MAX, 2308-2-00-80-00-00-07-0
2	4	J1,J2,J3,J4	CONN, BNC, 5 PINS	CONNEX, 112404
3	6	JP1,JP2,JP3,JP4,JP5,JP6	HEADER, 3PINS, 2mm	SAMTEC, TMM-103-02-L-S
4	6	JP1,JP2,JP3,JP4,JP5,JP6	SHUNT, 2MM CENTER	SAMTEC, 2SN-BK-G
5	4	MH1,MH2,MH3,MH4	STAND-OFF, NYLON 0.25"	KEYSTONE, 8831(SNAP ON)

Figure 4. Bill of Materials