



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





ADKeyboard Module (SKU: DFR0075)



ADKeyboard Module (SKU: DFR0075)

Contents

- [1 Introduction](#)
- [2 Specifications](#)
- [3 Pin out Diagram](#)
- [4 Wiring Diagram](#)
- [5 Sample Code](#)


Introduction

This keyboard uses an analog input to read the five key state which saves IO resource for the Arduino. It can be used together with our IO Expansion Shield_For Arduino(V5)_ (SKU:_DFR0088) to make amazing interactive project.


Specifications

- Supply voltage: 5V
- Interface: Analog
- Size: 40x33mm

Pin out Diagram

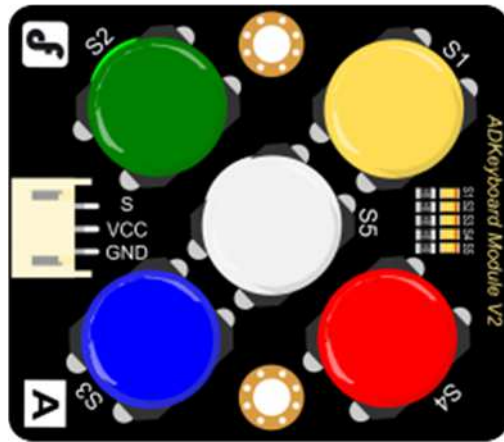

Wiring Diagram

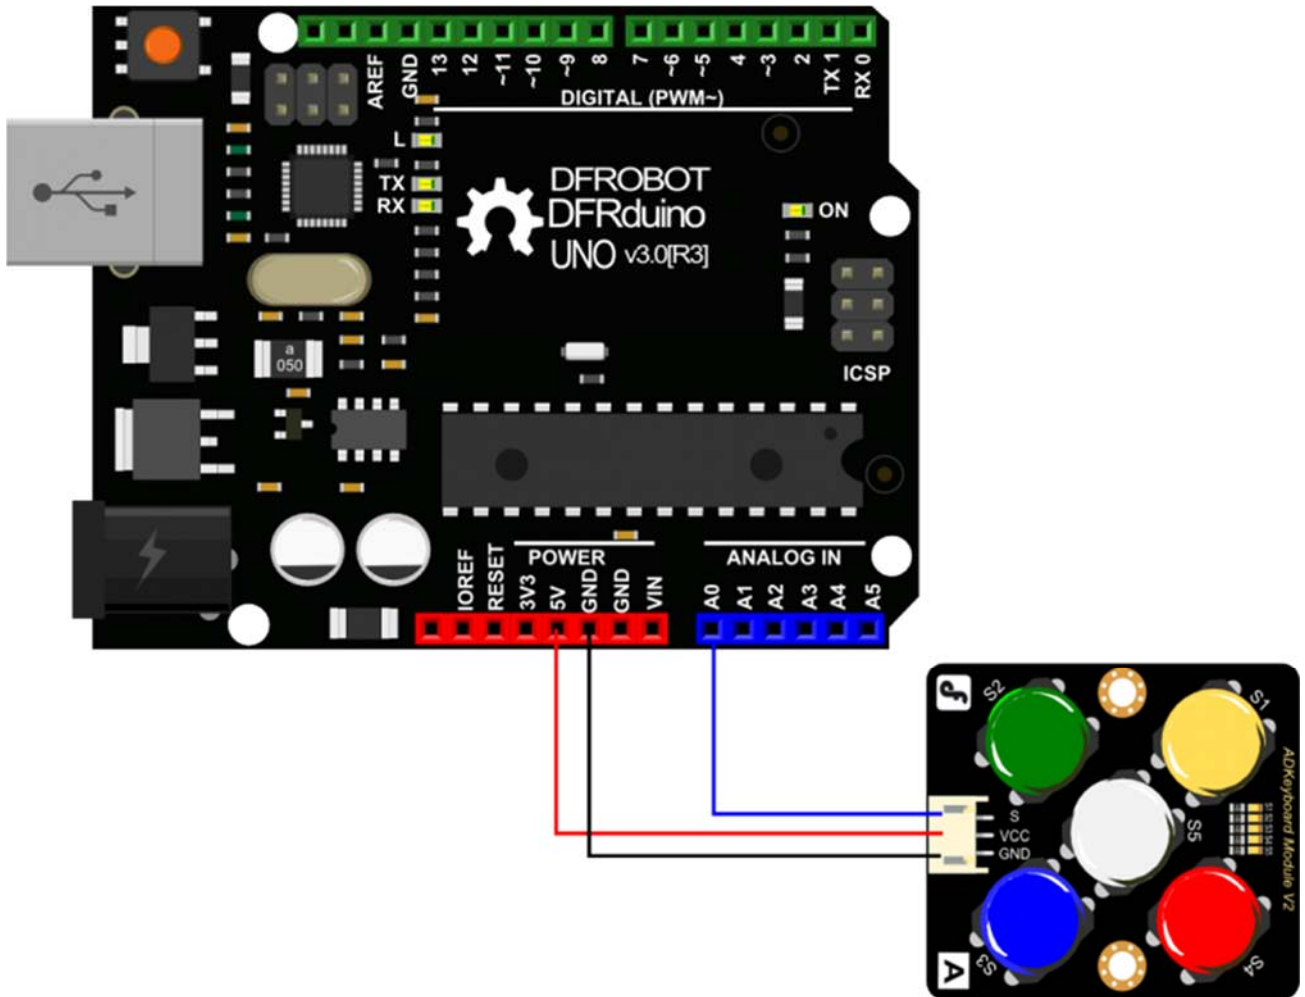

Sample Code

```
//ADKeyboard Module
//Developed by DFRobot.com
//Last modified 30/11/2011
//Version 1.0
int adc_key_val[5] = {600, 650, 700, 800, 900 };
int NUM_KEYS = 5;
int adc_key_in;
int key=-1;
int oldkey=-1;
void setup()
{
  pinMode(13, OUTPUT); //we'll use the debug LED to output a heartbeat
  Serial.begin(9600); // 9600 bps
}

void loop()
{
  adc_key_in = analogRead(0); // read the value from the sensor
  digitalWrite(13, LOW);
  key = get_key(adc_key_in); // convert into key press

  if (key != oldkey) // if keypress is detected
  {
    delay(50); // wait for debounce time
    adc_key_in = analogRead(0); // read the value from the sensor
    key = get_key(adc_key_in); // convert into key press
    if (key != oldkey)
    {
      oldkey = key;
      if (key >=0) {
        digitalWrite(13, HIGH);
        switch(key)
        {

```

```

        case 0:Serial.println("S1 OK");
            break;
        case 1:Serial.println("S2 OK");
            break;
        case 2:Serial.println("S3 OK");
            break;
        case 3:Serial.println("S4 OK");
            break;
        case 4:Serial.println("S5 OK");
            break;
    }
}
}
}
delay(100);
}
// Convert ADC value to key number
int get_key(unsigned int input)
{
    int k;
    for (k = 0; k < NUM_KEYS; k++)
    {
        if (input < adc_key_val[k])
        {
            return k;
        }
    }
    if (k >= NUM_KEYS)k = -1; // No valid key pressed
    return k;
}
}

```