



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Self-Locking Switch SKU: DFR0423

From Robot Wiki

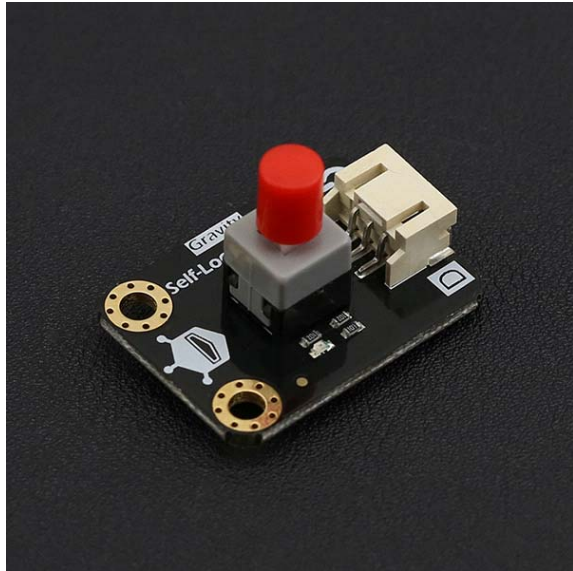

Contents

- 1 Introduction
- 2 Specification
- 3 Pinouts
- 4 Tutorial
 - 4.1 Requirements
 - 4.2 Wiring Diagram
 - 4.3 Sample Code:
 - 4.4 Results


Introduction

This module is a self locking switch. Press the button to turn it to the "on" state. Press it again to turn it to the "off" state. The board has immersion gold plating and is compatible with the "gravity" 3 pin interface, making it easy to connect to an Arduino I/O expansion shield.

Specification

- Operating Voltage: +3.3-5V
- Output Type: Digital
- Interface Mode: PH2.0-3P
- Dimension: 30*22mm/1.18*0.86 inches

Pinouts

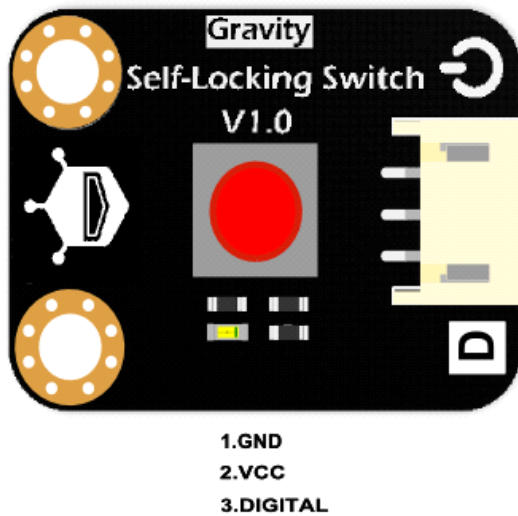


Tutorial

This is a simple test code that will test if the button is pressed or not.

Requirements

- **Hardware**
 - UNO x1
 - Self-Locking Switch x1
 - Jumper Wires
- **Software**
 - Arduino IDE V1.6.8 Click to Download Arduino IDE from Arduino® <https://www.arduino.cc/en/Main/Software>

Wiring Diagram

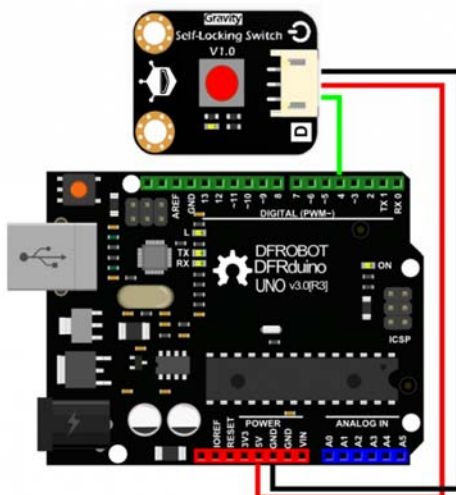

Sample Code:

```
1  /*****
2  * Self-Locking Switch
3  * *****/
4  * This example lights the LED when the button is pressed
5
6  * @author linfeng(490289303@qq.com)
7  * @version V1.0
8  * @date 2016-1-25
9
10 * GNU Lesser General Public License.
11 * See <http://www.gnu.org/licenses/> for details.
12 * All above must be included in any redistribution
13 * *****/
14
15
16 int ledPin = 13;
17 int inputPin = 4;
18
19 void setup() {
20   pinMode(ledPin, OUTPUT);
21   pinMode(inputPin, INPUT);
22 }
23
24 void loop(){
25   int val = digitalRead(inputPin);
26   if (val == HIGH) {
27     digitalWrite(ledPin, HIGH);
28   } else {
29     digitalWrite(ledPin, LOW);
30   }
31 }
```


Results

When you press the button, the LED connected to pin 13 of the micro controller will turn on; press the button again and the LED will turn off.

For any questions/advice/cool ideas to share, please visit [DFRobot Forum](#).