

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









Panasonic

Explanation of Part Numbers



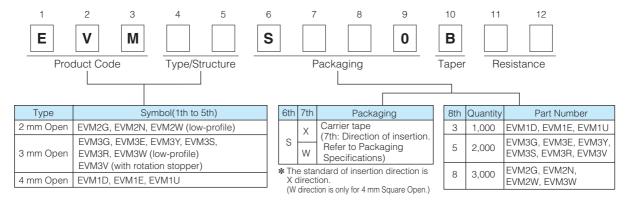

Ceramic Trimmer Potentiometers



Type	Symbol		Symbol	Packaging		
6 mm Square Dustproo	E\/\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\		SA00	Radial taping height 20 mm		
Radial Taping	EVIVIAA, EVIVIAE		SA01	Radial taping height 21 mm		
C C D	EVMAA, EVMAE		GA00	Bulk Standa	ard	
6 mm Square Dustprod Bulk	EVMAH, EVMAJ EVMAS					

Symbol	Resistance	EVM2N EVM3S EVM1U EVM2W EVM3W EVMAA EVM3G EVM3V EVMAH EVM3E EVM1D EVMAJ EVM3Y EVM1E EVMAS	EVM3R	EVMAE	EVM2G
11	10 Ω	_	_	0	_
21	20 Ω	_	_	0	_
51	50 Ω	_	_	0	_
12	100 Ω	0	_	0	0
C2	150 Ω	0	_	_	0
22	200 Ω	0	_	0	_
E2	220 Ω	0	_	_	0
32	300 Ω	0	_	_	_
Y2	330 Ω	0	_	_	0
Q2	470 Ω	0	_	_	0
52	500 Ω	0	0	0	_
S2	680 Ω	0	0	_	0
13	1 kΩ	0	0	_	0
СЗ	1.5 kΩ	0	0	_	0
23	2 kΩ	0	0	_	_
E3	2.2 kΩ	0	0	_	0
33	3 kΩ	0	0	_	_
Y3	$3.3\mathrm{k}\Omega$	0	0	_	0
Q3	4.7 kΩ	0	0	_	0
53	5 kΩ	0	0	_	_
S3	6.8 kΩ	0	0	_	0
14	10 kΩ	0	0	_	0
C4	15 kΩ	0	0	_	0
24	20 kΩ	0	0	_	_
E4	22 kΩ	0	0	_	0
34	30 kΩ	0	0	_	_
Y4	33 kΩ	0	0	_	0
Q4	47 kΩ	0	0	_	0
54	50 kΩ	0	0	_	_
S4	68 kΩ	0	0	_	0
15	100 kΩ	0	0	_	0
C5	150 kΩ	0	0	_	0
25	200 kΩ	0	0	_	_
E5	220 kΩ	0	0	_	0
35	300 kΩ	0	0	_	_
Y5	330 kΩ	0	0	_	0
Q5	470 kΩ	0	0	_	0
55	500 kΩ	0	0	_	_
S5	680 kΩ	0	0	_	0
16	1 ΜΩ	0	0	_	0

11th	12th	11th	Significant number	
		С	1.5	
		Е	2.2	
		Υ	3.3	
Significant Number	Number of zero	Q	4.7	
of resistance	Trainibol of 2010	S	6.8	
When significant numl	per is odd, letters are as	signed as	shown above	