



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



FAM1

Flexible Absorbent Material



Features

- Provide effective EMI suppression over a wide frequency range (10MHz to 18GHz)
- Ultra thin and extremely flexible, can be easily fitted to a wide range of form-factors
- UL approved non-conductive adhesive backing available as an option
- Highly effective in preventing resonance and suppressing coupling
- High surface resistance (10^8 - 10^9 ohms)
- Manufacturing friendly solution
- Can be cut to any shape

Applications

- Notebooks, PCs, workstations
- LNBS for satellite systems
- Mobile communications equipment
- Base stations for mobile phones and handsets
- Peripheral devices for computers
- Wireless equipment
- Mobile phones
- High speed clocks and timing devices
- RFID (Radio Frequency Identification) systems
- NFC (Near field communication) systems
- Wireless chargers

RFID Applications


Besides the suppression and control of EMI issues, FAM can be a solution for RFID devices as well.

FAM is highly suitable for LF(125KHz) and HF(13.56MHz) bands. FAM can deal with complex issues such as when the RFID Reader/Writer or RFID tag is attached to a metal surface. When used in this way FAM can reduce design complexity and significantly lower the total cost of ownership.


Material List

Property	Unit	FAM1	Test Method
Operating Temperature	°C	-20 to 80	-
Applicable Frequency	GHz	0.01 to 8	-
Thickness Range	mm	0.20 to 2.50	-
Max. Dimension	mm	400 x 400	-
Surface Resistance	ohm	10^6	ASTM D257
Hardness	Shore A	90	ASTM D2240
Specific Gravity	g/cm ³	3.6	ASTM D792
Elongation	%	10.4	ASTM D412
Tensile Strength	Kgf/cm ²	25	ASTM D412
Thermal Conductivity	W/mK	1.2	ASTM D5470
RoHS Compliance 2002/95/EC -	-	Yes	-
Halogen-Free	-	No	-
Flame Retardant	-	UL94V-0	-

Sheet Shape Examples




Cable wrap




Flat cables



IC covers



IC interface



Interface between
case and board

Item		0.9 GHz	1.8 GHz	2.4 GHz	Application Examples
FAM1	0.20mm	-0.22dB (4.9%)	-0.35dB (7.7%)	-0.50dB (10.9%)	[Shielding Box] [Power Supply] [Mobile Phone] [GPS] [Battery] [IC] [NB] [NFC] [RFID tag/reader] [Wireless Charger]
	0.25mm	-0.40dB (8.8%)	-0.63dB (13.5%)	-0.84dB (17.6%)	
	0.33mm	-0.90dB (18.7%)	-1.25dB (25.0%)	-1.56dB (30.2%)	
	0.60mm	-1.32dB (26.2%)	-1.49dB (28.9%)	-1.75dB (33.2%)	
	1.0mm	-1.70dB (32.7%)	-2.35dB (41.8%)	-3.04dB (50.3%)	
	1.5mm	-2.51dB (43.9%)	-3.32dB (53.4%)	-3.85dB (58.8%)	
	2.0mm	-3.31dB (53.3%)	-4.21dB (62.1%)	-4.66dB (65.8%)	
	2.5mm	-4.46dB (64.2%)	-5.79dB (73.6%)	-5.64dB (73.4%)	

*Test results may vary from application to application





Tube Shape

Item	FT0302	FT0504	FT0705	FT0906	FT1107	FT1309	FT1510
OD (mm)	3.0	5.0	7.0	9.0	11.0	13.0	15.0
ID (mm)	2.0	4.0	5.0	6.0	7.0	9.0	10.0




Return Loss – Frequency:


Return Loss (dB)	0.5	1	2	3	4	5	6	7	8	9	10	20	30
Absorb Rate (%)	11	21	37	50	60	69	75	80	86	89	90	99	99.9

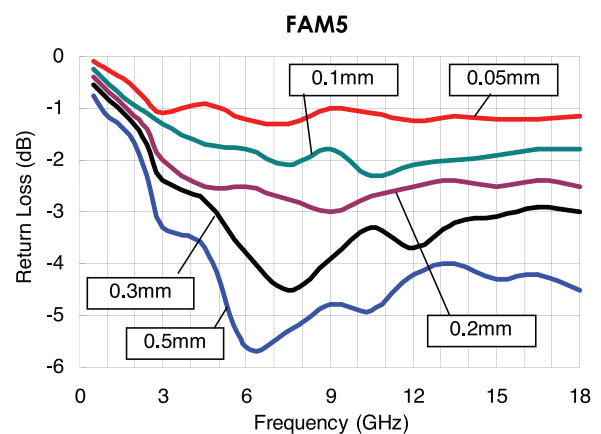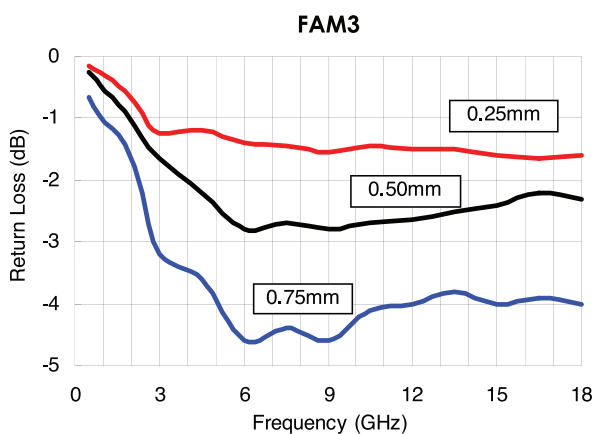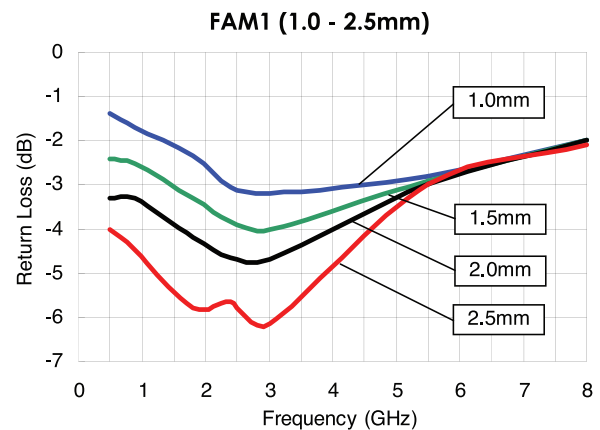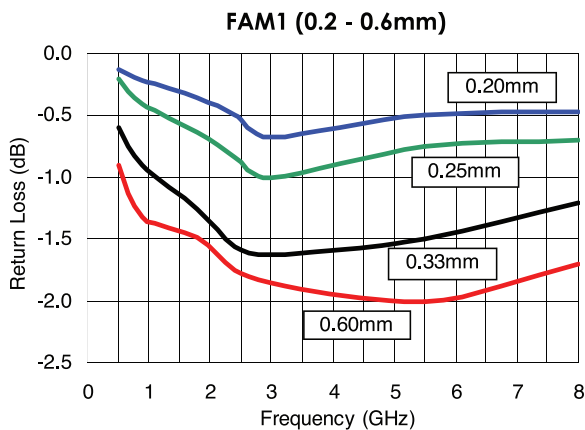

Horizontal (before)

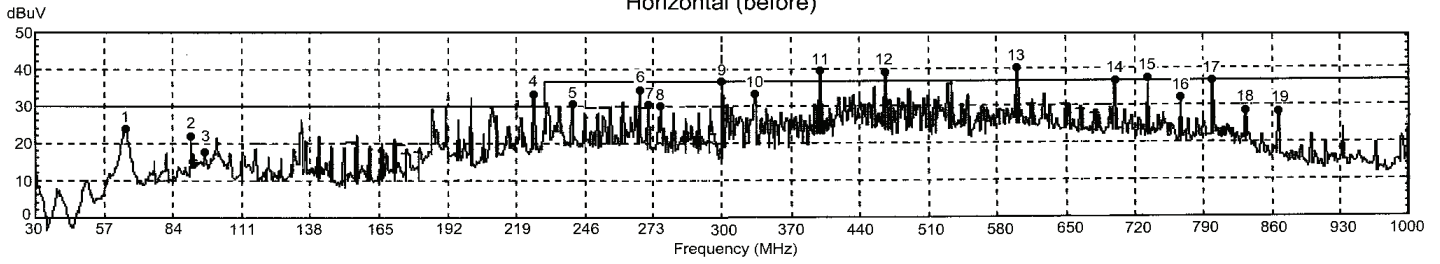


Horizontal (after)

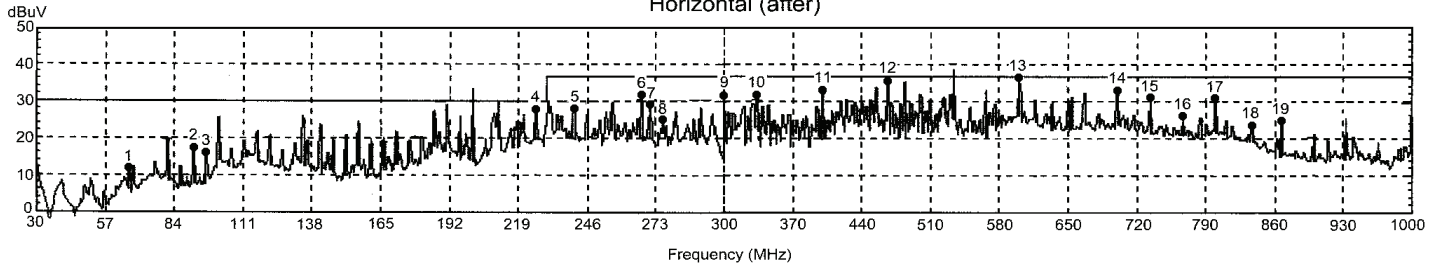


Horizontal	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
Frequency(MHz)	65.1	91.7	96.3	225.6	241.0	267.2	270.7	275.7	300.0	334.0	399.0	466.0	600.0	700.0	733.0	767.0	800.0	833.0	867.0
Before (dBuV)	23.8	21.6	18.9	32.7	30.1	33.5	30.2	29.7	36.4	34.3	39.9	38.9	40.2	36.8	37.0	31.6	35.6	27.9	27.6
After (dBuV)	12.0	16.9	15.4	27.1	28.0	31.2	27.5	24.7	31.1	31.2	32.9	36.9	36.6	32.7	30.5	25.9	30.7	23.0	24.6
Attenuation (dBuV)	11.8	4.7	3.5	5.6	2.1	2.3	2.7	5.0	5.3	3.1	7.0	2.0	3.6	4.1	6.5	5.7	4.9	4.9	3.0

Vertical (before)

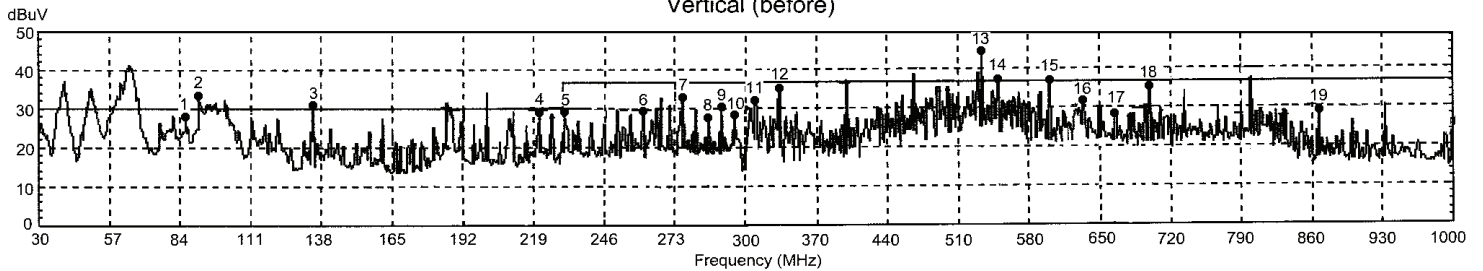

Vertical (after)

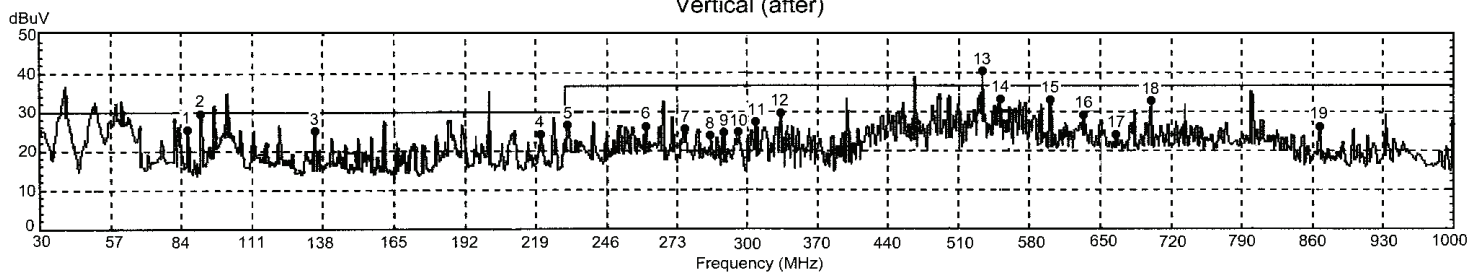

Vertical	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
Frequency(MHz)	86.1	91.3	134.5	221.3	230.6	261.0	275.3	285.7	290.7	295.4	309.0	333.0	534.0	550.0	633.0	665.0	701.0	709.0	866.0
Before (dBuV)	28.0	33.1	30.4	28.2	28.8	28.8	32.3	27.3	30.2	28.4	31.7	24.5	43.8	36.7	36.3	30.9	28.0	34.9	38.7
After (dBuV)	25.1	29.0	24.9	22.8	26.2	25.8	25.3	23.9	25.8	24.7	26.8	29.6	40.6	33.3	32.7	27.8	24.1	32.4	25.9
Attenuation (dBuV)	2.9	4.1	5.5	5.4	2.6	3.0	7.0	3.4	4.4	3.7	4.9	4.9	3.2	3.4	3.6	3.1	3.9	2.5	2.8

LF/HF RFID on metal application:

When a RFID tag or RFID reader/writer is attached to a metal surface, the read distance will become much shorter than expected. The traditional solution is to increase the space between the RFID antenna and the metal but this can be detrimental when a thin device is desired. FAM can be an excellent solution to improve the read distance for both LF (125/134.2KHz) and HF (13.56MHz) bands. FAM is inserted between the RFID antenna and the metal surface to give an improvement of read distance of up to 80%. This can significantly improve the device footprint and overall efficiency.

Frequently Asked Questions:

How to use FAM with an RFID tag?

Place the cut FAM pad into the cavity and ensure good adhesion. When attaching to a metal surface FAM should not be attached to the antenna side

How to use FAM for RFID reader/writer applications?

Insert the pre-cut FAM pad between the antenna and PCB. The antenna side should not be attached to the metal surface directly.

Can I use FAM for UHF RFID applications?

FAM works well in LF/HF RFID applications but is not suitable for UHF RFID (Electric-field) applications

How do I select the correct FAM thickness?

FAM is available in a number of standard thicknesses. T-Global engineers can offer application advice for design and engineering applications

What FAM dimension should I use?

The FAM pad should cover the entire RFID antenna area for optimum performance

Are the faces of FAM the same?

Unless an adhesive is applied there is no need to mount the FAM pad in a specific orientation.

Read Distance (Reference):

ISO Card	No Metal	On Metal	FAM1								FAM3			FAM5				
			0.2 mm	0.25 mm	0.33 mm	0.6 mm	1.0 mm	1.5 mm	2.0 mm	2.5 mm	0.25 mm	0.50 mm	0.75 mm	0.05 mm	0.1 mm	0.2 mm	0.3 mm	0.5 mm
Icode2	11	0	5.5	6.5	6.5	8	7.5	7	7	7	6	6.5	7	4.5	8	7	6.5	6
TI 2048	14	0	4	5	5.5	9	7	7	6	6	4.5	8.5	9	5.5	7	7	5.5	5
EM4100	19	4.5	8	9	9.5	12	7.5	5	4	4	9.5	12	9	11	12	4	4	3

- The read distance unit is CM
- Different reader will cause different read distance