imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor dates sheds, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor dates sheds and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use on similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor and its officers, employees, subsidiaries, affliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or i, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconduc



April 2015

FAN53202 5 A, 2.4 MHz, Digitally Programmable TinyBuck® Regulator

Features

- Up to 91% Efficiency
- Quiescent Current in PFM Mode: 60 µA (Typical)
- Digitally Programmable Output Voltage:
 0.6-1.3875 V in 12.5 mV Steps
- Best-in-Class Load Transient
- Continuous Output Current Capability: 5 A
- 2.5 V to 5.5 V Input Voltage Range
- Programmable Slew Rate for Voltage Transitions
- Fixed-Frequency Operation: 2.4 MHz
- I²C-Compatible Interface Up to 3.4 Mbps
- Internal Soft-Start
- Input Under-Voltage Lockout (UVLO)
- Thermal Shutdown and Overload Protection
- 20-Bump Wafer-Level Chip Scale Package (WLCSP)

Applications


- Application, Graphic, and DSP Processors
- ARM™, Krait™, OMAP™, NovaThor™, ARMADA™
- Hard Disk Drives
- Tablets, Netbooks, Ultra-Mobile PCs
- Smart Phones
- Gaming Devices

Description

The FAN53202 is a step-down switching voltage regulator that delivers a digitally programmable output from an input voltage supply of 2.5 V to 5.5 V. The output voltage is programmed through an I^2C interface capable of operating up to 3.4 MHz.

Using a proprietary architecture with synchronous rectification, the FAN53202 is capable of delivering 5 A continuous at over 80% efficiency, while maintaining over 80% efficiency at load currents as low as 10 mA. The device can also support a 7 A 500 ms pulse. The regulator operates at a nominal fixed frequency of 2.4 MHz, which reduces the value of the external components to 330 nH for the inductor and as low as 22 μ F for the output capacitor. Additional output capacitance can be added to improve regulation during load transients without affecting stability. Inductance up to 1.2 μ H may be used with additional output capacitance.

At moderate and light loads, Pulse Frequency Modulation (PFM) is used to operate in Power-Save Mode with a typical quiescent current of 60 μ A. Even with such a low quiescent current, the part exhibits excellent transient response during large load swings. At higher loads, the system automatically switches to fixed-frequency control, operating at 2.4 MHz. In Shutdown Mode, the supply current drops below 1 μ A, reducing power consumption. PFM Mode can be disabled if constant frequency is desired. The FAN53202 is available in a 20-bump, 1.6 x 2 mm, WLCSP.




All trademarks are the property of their respective owners.

FAN53202 -
l ហ
Þ
N
4
MHz,
D
git
all
Y P
rogrammat
ole TinyBuck®
Regulator

Ordering Information

Part Number	Power-Up Defaults		I2C Slave Max Address Pulse		Temperature Bange	Package	Packing	Device
	VSEL0	VSEL1		Current (500ms)	Range	Jer and State	Method	Marking
FAN53202UC23X	1.15 V	1.15 V	C0	7.0 A	-40 to 85°C	WLCSP- 20	Tape & Reel	СК

Pin Configuration



Pin Definitions

Pin #	Name	Description					
A1	VSEL	Voltage Select . When this pin is LOW, V_{OUT} is set by the VSEL0 register. When this pin is HIGH, V_{OUT} is set by the VSEL1 register.					
A2	EN	able. The device is in Shutdown Mode when this pin is LOW. All register values are kept ing shutdown. All registers go to default values when EN pin is LOW.					
A3	SCL	I ² C Serial Clock					
A4	VOUT	VOUT. Sense pin for VOUT. Connect to COUT.					
B1	SDA	I ² C Serial Data					
B2, B3, C1 – C4	GND	Ground . Low-side MOSFET is referenced to this pin. C_{IN} and C_{OUT} should be returned with a minimal path to these pins.					
B4	AGND	Analog Ground . All signals are referenced to this pin. Avoid routing high dV/dt AC currents through this pin.					
D1, D2, E1, E2	VIN	Power Input Voltage . Connect to the input power source. Connect to C_{IN} with minimal path.					
D3, D4, E3, E4	SW	Switching Node. Connect to the inductor.					

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol		Min.	Max.	Unit	
	Valtage on SM/ VIN Dine	-0.3	7.0	v	
V _{IN}	Voltage on SW, VIN Pins	IC Switching	-0.3	6.5	v
	Voltage on All Other Pins	IC Not Switching	-0.3	V _{IN} ⁽¹⁾	V
V _{OUT}	Voltage on VOUT Pin	-0.3	3.0	V	
$V_{\text{INOV}_\text{SLEW}}$	Maximum Slew Rate of VIN	ximum Slew Rate of $V_{IN} > 6.5 V$, PWM Switching			
ESD	Electrostatic Discharge	2500		v	
	Protection Level	1	500		
TJ	Junction Temperature		-40	+150	°C
T _{STG}	Storage Temperature		-65	+150	°C
TL	Lead Soldering Temperatur	re, 10 Seconds		+260	°C

Note:

1. Lesser of 7 V or V_{IN} +0.3 V.

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to Absolute Maximum Ratings.

Symbol	Parameter	Min.	Тур.	Max.	Unit
V _{IN}	Supply Voltage Range	2.5		5.5	V
I _{OUT}	Output Current	0		5	Α
L	Inductor		0.33		μH
CIN	Input Capacitor		10		μF
COUT	Output Capacitor		44		μF
T _A	Operating Ambient Temperature	-40		+85	°C
TJ	Operating Junction Temperature	-40		+125	°C

Thermal Properties

Symbol	Parameter	Min.	Тур.	Max.	Unit
θ_{JA}	Junction-to-Ambient Thermal Resistance ⁽²⁾		38		°C/W

Note:

2. See Thermal Considerations in the Application Information section.

Electrical Characteristics

Minimum and maximum values are at $V_{IN} = 2.5$ V to 5.5 V, $T_A = -40$ °C to +85°C, unless otherwise noted. Typical values are at $T_A = 25$ °C, $V_{IN} = 5$ V and EN=HIGH.

Symbol	Parameter	Condition	Min.	Тур.	Max.	Unit
Power Su	pplies				1	1
l _Q	Quiescent Current	I _{LOAD} =0		60	100	μA
	H/W Shutdown Supply Current	EN=GND		0.1	5.0	μA
I _{SD}	S/W Shutdown Supply Current	EN= V _{IN} , BUCK_ENx=0		41	75	μA
V _{UVLO}	Under-Voltage Lockout Threshold	V _{IN} Rising		2.35	2.45	V
VUVHYST	Under-Voltage Lockout Hysteresis			350		mV
EN, VSEL	, SDA, SCL			•	•	•
V _{IH}	HIGH-Level Input Voltage		1.1			V
V _{IL}	LOW-Level Input Voltage				0.4	V
VLHYST	Logic Input Hysteresis Voltage			160		mV
I _{IN}	Input Bias Current for Logic Pin	Input Tied to GND or 1.8V		0.01	1.00	μA
PGOOD				•		•
IOUTL	PGOOD Pull-Down Current				1	mA
I _{OUTH}	PGOOD HIGH Leakage Current			0.01	1.00	μA
V _{OUT} Regu	llation			•		
V _{REG}	V _{OUT} DC Accuracy	$I_{OUT(DC)}=0$ to 5A, Auto Mode, 2.5 V \leq V _{IN} \leq 4.5 V	-2.0		4.0	%
Power Sw	vitch and Protection					
ILIMPK	P-MOS Peak Current Limit	Open Loop	8.5	10.0	11.5	Α
M	have the OV/D Object shares	Rising Threshold		6.15		V
V _{SDWN}	Input OVP Shutdown	Falling Threshold	5.50	5.85		V
Frequenc	y Control					
f _{SW}	Oscillator Frequency (FPWM)		2.05	2.40	2.75	MHz
R _{OFF}	VOUT Pull-Down Resistance, Disabled	EN=0 or V _{IN} <v<sub>UVLO</v<sub>		160		Ω

Note:

3. Monotonicity assured by design.


System Characteristics

The following table is verified by design and verified while using the following external components: L = 0.33 μ H, DFE252012F (TOKO), CIN = C2012X5R1A106M (TDK), C_{OUT} = 2 x C2012X5R0J226M (TDK) These parameters are not verified in production. Minimum and maximum values are at V_{IN} = 2.5 V to 5.5 V, V_{EN} = 1.8 V, T_A = -40°C to +85°C; circuit of Figure 1, unless otherwise noted. Typical values are at T_A = 25°C, V_{IN} = 3.6V, V_{EN} = 1.8 V.

Symbol	Parameter		Min.	Тур.	Max.	Unit
A)/	Land Damidation	$I_{OUT} = 0$ A to 2.5 A, $V_{IN} = 3.8$ V (Auto)		0.3		%/A
ΔV_{OUT1}	Load Regulation	$I_{OUT} = 1 \text{ A to 5 A}, V_{IN} = 3.8 \text{ V}$ (PWM)		0.1		70/A
ΔV_{OUT2}	Line Regulation	$3.6 \text{ V} \le \text{V}_{\text{IN}} \le 4.0 \text{ V}, \text{ I}_{\text{OUT}} = 3 \text{ A}$		0.03		%/V
V	Pipple Veltege	$V_{IN} = 3.8 \text{ V}, I_{OUT} = 100 \text{ mA},$ PFM Mode		15		mV
V _{OUT_RIPPLE}	Ripple Voltage	V_{IN} = 3.8 V, I_{OUT} = 2000 mA, PWM Mode		5		III V
		$P_{VIN} = 3.6 V, V_{OUT} = 1.15 V,$ $I_{OUT} = 100 mA$		87		
η	Efficiency	$\label{eq:PVIN} \begin{array}{l} {\sf P}_{{\sf VIN}} = 3.6 \ {\sf V}, \ {\sf V}_{{\sf OUT}} = 1.15 \ {\sf V}, \\ {\sf I}_{{\sf OUT}} = 500 \ {\sf mA} \end{array}$		89		%
		$\label{eq:PVIN} \begin{array}{l} {\sf P}_{{\sf VIN}} = 3.6 \ {\sf V}, \ {\sf V}_{{\sf OUT}} = 1.15 \ {\sf V}, \\ {\sf I}_{{\sf OUT}} = 2 \ {\sf A} \end{array}$		89		
T _{SS}	Soft-Start	EN High to 95% of Target_ V_{OUT.} (1.15 V), R_{LOAD} = 50 Ω		340		μs
ΔV_{OUT_LOAD}	Load Transient	$\begin{split} I_{OUT} &= 0.1 \text{ A} \Leftrightarrow 1.2 \text{ A}, \\ T_{R} &= T_{F} = 100 \text{ ns} \end{split}$		±40		mV
$\Delta V_{\text{OUT_LINE}}$	Line Transient	$\label{eq:VIN} \begin{array}{l} V_{\text{IN}} = 3.0 \ \text{V} \Leftrightarrow 3.6 \ \text{V}, \\ T_{\text{R}} = T_{\text{F}} = 10 \ \mu\text{s}, \ \text{I}_{\text{OUT}} = 500 \ \text{mA} \end{array}$		±25		mV
T _{LIMIT}	Thermal Shutdown			150		°C

Typical Characteristics

Unless otherwise specified, V_{IN} = 3.6 V, V_{OUT} = 1.15 V, V_{EN} = 1.8 V, T_A = 25°C; circuit and components according to Figure 1.








Figure 5. Output Regulation vs. Load Current and Input Voltage, V_{OUT}=0.85 V




Figure 7. PFM Entry / Exit Level vs. Input Voltage, V_{OUT}=0.85 V

Figure 6. Output Regulation vs. Load Current and Input Voltage, V_{out}=1.15 V

Output Current (mA)

3000

4000

5000




Figure 8. PFM Entry / Exit Level vs. Input Voltage, V_{OUT}=1.15 V

1.145

0

1000






Figure 4. Efficiency vs. Load Current and Temperature




2000

Typical Characteristics (Continued)

Unless otherwise specified, V_{IN} = 3.6 V, V_{OUT} = 1.15 V, V_{EN} = 1.8 V, T_A = 25°C; circuit and components according to Figure 1.

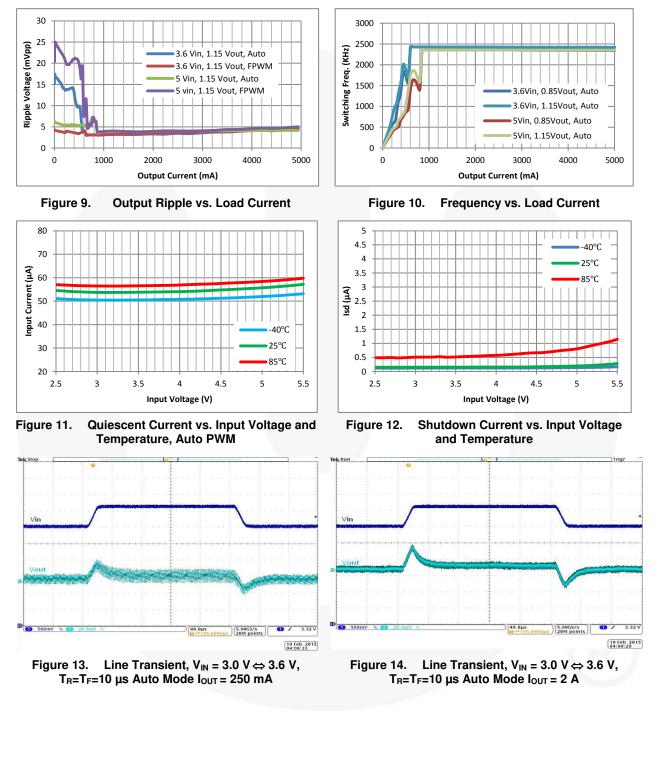

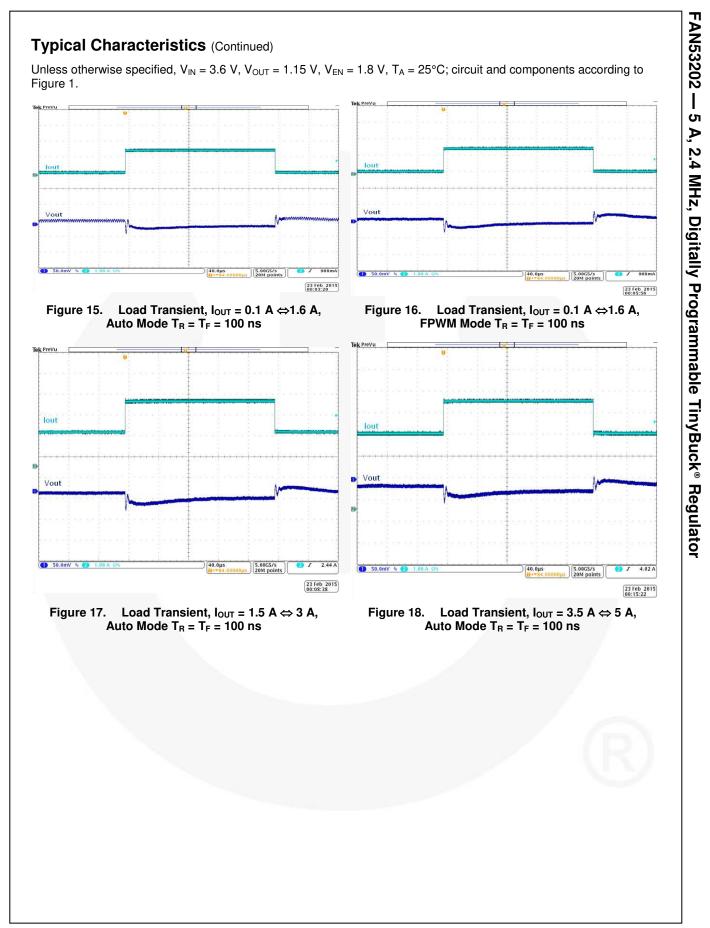

Operation Description

The FAN53202 is a step-down switching voltage regulator that delivers a programmable output voltage from an input voltage supply of 2.5 V to 5.5 V. Using a proprietary architecture with synchronous rectification, the FAN53202 is capable of delivering 5 A at over 80% efficiency. The regulator operates at a nominal frequency of 2.4 MHz at full load, which reduces the value of the external components to 330 nH for the output inductor and 22 μ F for the output capacitor. High efficiency is maintained at light load with single-pulse PFM.

The FAN53202 integrates an I^2C -compatible interface, allowing transfers up to 3.4 Mbps. This communication interface can be used to:

- Dynamically re-program the output voltage in 12.5 mV
- Reprogram the mode to enable or disable PFM;
- Control voltage transition slew rate; or
- Enable / disable the regulator.

Control Scheme

The FAN53202 uses a proprietary non-linear, fixedfrequency PWM modulator to deliver a fast load transient response, while maintaining a constant switching frequency over a wide range of operating conditions. The regulator performance is independent of the output capacitor ESR, allowing for the use of ceramic output capacitors. Although this type of operation normally results in a switching frequency that varies with input voltage and load current, an internal frequency loop holds the switching frequency constant over a large range of input voltages and load currents.

For very light loads, the FAN53202 operates in Discontinuous Current Diode (DCM) single-pulse PFM, which produces low output ripple compared with other PFM architectures. Transition between PWM and PFM is relatively seamless, providing a smooth transition between DCM and CCM Modes.

PFM can be disabled by programming the MODE bit HIGH in the VSEL registers.

Enable and Soft-Start

When the EN pin is LOW; the IC is shutdown, all internal circuits are off, and the part draws very little current. In this state, l^2C cannot be written to or read from. All registers are reset to default values when EN pin is LOW.

When the OUTPUT_DISCHARGE bit in the CONTROL register is enabled (logic HIGH) and the EN pin is LOW or the BUCK_ENx bit is LOW, a load is connected from VOUT to GND to discharge the output capacitors.

Raising EN while the BUCK_ENx bit is HIGH activates the part and begins the soft-start cycle. During soft-start, the modulator's internal reference is ramped slowly to minimize surge currents on the input and prevent overshoot of the output voltage. Synchronous rectification is inhibited during soft-start, allowing the IC to start into a pre-charged capacitive load. If large output capacitance values are used, the regulator may fail to start. Maximum C_{OUT} capacitance for successfully starting with a heavy constant-current load is approximately:

$$C_{\text{outmax}} \approx \left(I_{\text{limpk}} - I_{\text{load}} \right) \bullet \frac{320\,\mu}{V_{\text{out}}} \tag{1}$$

where C_{OUTMAX} is expressed in μF and I_{LOAD} is the load current during soft-start, expressed in A.

If the regulator is at its current limit for 16 consecutive current limit cycles, the regulator shuts down and enters 3-state before reattempting soft-start 1700 ms later. This limits the duty cycle of full output current during soft-start to prevent excessive heating.

The IC allows for software enable of the regulator, when EN is HIGH, through the BUCK_EN bits. BUCK_EN0 and BUCK EN1 are both initialized HIGH.

 Table 1.
 Hardware and Software Enable

F	Pins	Bľ		
EN	VSEL	BUCK_EN0	BUCK_EN1	Output
0	Х	Х	Х	OFF
1	0	0	Х	OFF
1	0	1	Х	ON
1	1	Х	0	OFF
1	1	Х	1	ON

VSEL Pin and I²C Programming Output Voltage

The output voltage is set by the NSELx control bits in VSEL0 and VSEL1 registers. The output voltage is given as:

$$V_{OUT} = 0.60V + NSELx \bullet 12.5mV$$
 (2)

Output voltage can also be controlled by toggling the VSEL pin LOW or HIGH. VSEL LOW corresponds to VSEL0 and VSEL HIGH corresponds to VSEL1. Upon POR, VSEL0 and VSEL1 are reset to their default voltages, shown in Table 5.

Transition Slew Rate Limiting

When transitioning from a low- to high-voltage, the IC can be programmed for one of eight possible slew rates using the SLEW bits in the CONTROL register (Table 5 and Table 6).

	Transitio		•	
Decimal	Bin	Slew Rate		
0	000	80	mV / μs	
1	001	40	mV / μs	
2	010	20	mV / μs	
3	011	10	mV / μs	
4	100	5	mV / μs	
5	101	2.5	mV / μs	
6	110	1.25	mV / μs	
7	111	0.625	mV / μs	

Table 2. Transition Slew Rate

Transitions from high to low voltage rely on the output load to discharge VOUT to the new set point. Once the high-to-low transition begins, the IC stops switching until VOUT has reached the new set point.

Under-Voltage Lockout

When EN is HIGH, the under-voltage lockout keeps the part from operating until the input supply voltage rises HIGH enough to properly operate. This ensures proper operation of the regulator during startup or shutdown.

Input Over-Voltage Protection (OVP)

When V_{IN} exceeds V_{SDWN} (about 6.2 V) the IC stops switching to protect the circuitry from internal spikes above 6.5 V. An internal filter prevents the circuit from shutting down due to noise spikes.

Current Limiting

A heavy load or short circuit on the output causes the current in the inductor to increase until a maximum current threshold is reached in the high-side switch. Upon reaching this point, the high-side switch turns off, preventing high currents from causing damage. Sixteen consecutive current limit cycles in current limit cause the regulator to shut down and stay off for about 1700 μ s before attempting a restart.

Thermal Shutdown

When the die temperature increases, due to a high load condition and/or high ambient temperature, the output switching is disabled until the die temperature falls sufficiently. The junction temperature at which the thermal shutdown activates is nominally 150°C with a 17°C hysteresisl²C Interface

I²C Interface

The FAN53202's serial interface is compatible with Standard, Fast, Fast Plus, and HS Mode I²C-Bus® specifications. The FAN53202's SCL line is an input and its SDA line is a bi-directional open-drain output; it can only pull down the bus when active. The SDA line only pulls LOW during data reads and when signaling ACK. All data is shifted in MSB (bit 7) first.

I²C Slave Address

In hex notation, the slave address assumes a 0 LS Bit. The hex slave address is C0.

Table 3. I²C Slave Address

i abi	U U .		010		uurc	33		
Hex					Bits			
	7	6	5	4	3	2	1	0
C0	1	1	0	0	0	0	0	R/W

Other slave addresses can be assigned. Contact a Fairchild Semiconductor representative.

Bus Timing

As shown in Figure 19, data is normally transferred when SCL is LOW. Data is clocked in on the rising edge of SCL. Typically, data transitions shortly at or after the falling edge of SCL to allow ample time for the data to set up before the next SCL rising edge.






Figure 19. Data Transfer Timing


Each bus transaction begins and ends with SDA and SCL HIGH. A transaction begins with a START condition, which is defined as SDA transitioning from 1 to 0 with SCL HIGH, as shown in Figure 20



A transaction ends with a STOP condition, which is defined as SDA transitioning from 0 to 1 with SCL HIGH, as shown in Figure 21.



During a read from the FAN53202, the master issues a REPEATED START after sending the register address, and before resending the slave address. The REPEATED START is a 1 to 0 transition on SDA while SCL is HIGH, as shown in Figure 22.



High-Speed (HS) Mode

The protocols for High-Speed (HS), Low-Speed (LS), and Fast-Speed (FS) Modes are identical, except the bus speed for HS mode is 3.4 MHz. HS Mode is entered when the bus master sends the HS master code 00001XXX after a START condition. The master code is sent in Fast or Fast-Plus Mode (less than 1 MHz clock); slaves do not ACK this transmission.

The master generates a REPEATED START condition (Figure 20 that causes all slaves on the bus to switch to HS Mode. The master then sends I^2C packets, as described above, using the HS Mode clock rate and timing.


The bus remains in HS Mode until a STOP bit (Figure 21) is sent by the master. While in HS Mode, packets are separated by REPEATED START conditions (Figure 22) Read and Write Transactions.

The following figures outline the sequences for data read and write. Bus control is signified by the shading of the

packet,	defined	as	Master	Drives Bus		and
Slave	Drives Bus	All add	dresses	and data	are N	/ISB
first.		. /		und data	are n	100

Table 4. I²C Bit Definitions for Figure 23 & Figure 24

guic 24
Definition
REPEATED START, see Figure 22
STOP, see Figure 21
START, see Figure 20
ACK. The slave drives SDA to 0 to acknowledge the preceding packet.
NACK. The slave sends a 1 to NACK the preceding packet.
REPEATED START, see Figure 22
STOP, see Figure 21

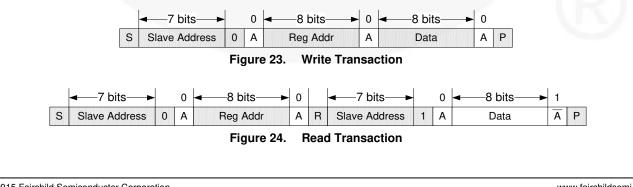

Register Description

Table 5. Map

Hex Address	Name	Function
00	VSEL0	Controls V_{OUT} settings when VSEL pin = 0
01	VSEL1	Controls V_{OUT} settings when VSEL pin = 1
02	CONTROL	Determines whether V_{OUT} output discharge is enabled and also the slew rate of positive transitions
03	ID1	Read-only register identifies vendor and chip type
04	ID2	Read-only register identifies die revision
05	MONITOR	Indicates device status

Table 6. Bit Definitions

The following table defines the operation of each register bit. Bold indicates power-on default values.

Bit	Name	Value	Description
VSE	L0 R/W	Register A	ddress: 00
7	BUCK_EN0	1	Software buck enable. When EN pin is LOW, the regulator is off. When EN pin is HIGH, BUCK_EN bit takes precedent.
0	MODEO	0	Allow Auto-PFM Mode during light load.
6	MODE0	1	Forced PWM Mode.
5:0	NSEL0		Sets V _{OUT} value from 0.6V to 1.3875 V in 12.5 mV steps
VSE	L1 R/W	Register A	ddress: 01
7	BUCK_EN1	1	Software buck enable. When EN pin is LOW, the regulator is off. When EN pin is HIGH, BUCK_EN bit takes precedent.
•		0	Allow AUTO-PFM Mode during light load.
6	MODE1	1	Forced PWM Mode.
5:0	NSEL1		Sets V _{OUT} value from 0.6V to 1.3875 V in 12.5 mV steps
CON	ITROL R/W	Register A	ddress: 02
7		0	When the regulator is disabled, V _{OUT} is not discharged.
7	OUTPUT_DISCHARGE	1	When the regulator is disabled, V_{OUT} discharges through an internal pull-down.
6:4	SLEW	000	Sets the slew rate for positive voltage transitions (see Table 2).
3	Reserved	0	Always reads back 0
2	Reserved	0	Always reads back 0
1:0	Reserved	00	Always reads back 00
ID1	R	Register A	ddress: 03
7:5	VENDOR	100	Signifies Fairchild as the IC vendor
4	Reserved	0	Always reads back 0
3:0	DIE_ID	0000	Refer to ordering information
ID2	R	Register A	ddress: 04
7:4	Reserved	0000	Always reads back 0000
3:0	DIE_REV	1100	IC mask revision
MON	NITOR R	Register A	ddress: 05
7	PGOOD	0	1: buck is enabled and soft-start is completed
6:0	Not used	000 0000	Always reads back 000 0000

Application Information

Selecting the Inductor

The output inductor must meet both the required inductance and the energy-handling capability of the application. The inductor value affects the average current limit, the output voltage ripple, and the efficiency.

The ripple current (ΔI) of the regulator is:

$$\Delta I \approx \frac{V_{OUT}}{V_{N}} \bullet \left(\frac{V_{N} - V_{OUT}}{L \bullet f_{SW}} \right)$$
(3)

The maximum average load current, $I_{\text{MAX(LOAD)},}$ is related to the peak current limit, $I_{\text{LIM}(\text{PK})},$ by the ripple current such that:

$$I_{MAX(LOAD)} = I_{LIM(PK)} - \frac{\Delta I}{2}$$
(4)

The FAN53202 is optimized for operation with L=330 nH, but is stable with inductances up to 1.0 μ H (nominal). The inductor should be rated to maintain at least 80% of its value at I_{LIM(PK)}. Failure to do so will lower the amount of DC current the IC can deliver.

Efficiency is affected by the inductor DCR and inductance value. Decreasing the inductor value for a given physical size typically decreases the DCR; but since ΔI increases, the RMS current increases, as do core and skin-effect losses.

$$I_{\text{RMS}} = \sqrt{I_{\text{OUT}(\text{DC})}^2 + \frac{\Delta I^2}{12}}$$
(5)

The increased RMS current produces higher losses through the $R_{\text{DS}(\text{ON})}$ of the IC MOSFETs as well as the inductor ESR.

Increasing the inductor value produces lower RMS currents, but degrades transient response. For a given physical inductor size, increased inductance usually results in an inductor with lower saturation current.

Table 7.Effects of Inductor Value (from330 nHRecommended)onRegulatorPerformance

I _{MAX(LOAD)}	$\Delta V_{OUT}^{}^{(Eq.(7))}$	Transient Response
Increase	Decrease	Degraded

Inductor Current Rating

The current limit circuit can allow substantial peak currents to flow through L1 under worst-case conditions. If it is possible for the load to draw such currents, the inductor should be capable of sustaining the current or failing in a safe manner.

For space-constrained applications, a lower current rating for L1 can be used. The FAN53202 may still protect these inductors in the event of a short circuit, but may not be able to protect the inductor from failure if the load is able to draw higher currents than the DC rating of the inductor.

Output Capacitor and Vout Ripple

The reference BOM suggests 0805 capacitors, but 0603 capacitors may be used if space is at a premium. Due to

voltage effects, the 0603 capacitors have a lower incircuit capacitance than the 0805 package, which can degrade transient response and output ripple.

Increasing C_{OUT} has negligible effect on loop stability and can be increased to reduce output voltage ripple or to improve transient response. Output voltage ripple, ΔV_{OUT} , is calculated by:

$$\Delta V_{OUT} = \Delta I_{L} \left[\frac{f_{SW} \cdot C_{OUT} \cdot ESR^{2}}{2 \cdot D \cdot (1 - D)} + \frac{1}{8 \cdot f_{SW} \cdot C_{OUT}} \right]$$
(6)

where C_{OUT} is the effective output capacitance.

The capacitance of C_{OUT} decreases at higher output voltages, which results in higher ΔV_{OUT} . Equation (6) is only valid for Continuous Current Mode (CCM) operation, which occurs when the regulator is in PWM Mode.

For large C_{OUT} values, the regulator may fail to start under a load. If an inductor value greater than 1.0 μ H is used, at least 30 μ F of C_{OUT} should be used to ensure stability.

The lowest ΔV_{OUT} is obtained when the IC is in PWM Mode and, therefore, operating at 2.4 MHz. In PFM Mode, f_{SW} is reduced, causing ΔV_{OUT} to increase.

ESL Effects

The Equivalent Series Inductance (ESL) of the output capacitor network should be kept low to minimize the square-wave component of output ripple that results from the division ratio C_{OUT} ESL and the output inductor (L_{OUT}). The square-wave component due to the ESL can be estimated as:

$$\Delta V_{OUT(SQ)} \approx V_{IN} \bullet \frac{ESL_{COUT}}{L1}$$
(7)

A good practice to minimize this ripple is to use multiple output capacitors to achieve the desired C_{OUT} value. For example, to obtain $C_{OUT}=20 \ \mu\text{F}$, a single 22 μF 0805 would produce twice the square wave ripple as two x 10 μF 0805.

To minimize ESL, try to use capacitors with the lowest ratio of length to width. 0805s have lower ESL than 1206s. If low output ripple is a chief concern, some vendors produce 0508 or 0612 capacitors with ultra-low ESL. Placing additional small-value capacitors near the load also reduces the high-frequency ripple components.

Input Capacitor

The ceramic input capacitors should be placed as close as possible between the VIN pin and PGND to minimize the parasitic inductance. If a long wire is used to bring power to the IC, additional "bulk" capacitance (electrolytic or tantalum) should be placed between $C_{\rm IN}$ and the power source lead to reduce under-damped ringing that can occur between the inductance of the power source leads and $C_{\rm IN}$.

The effective C_{IN} capacitance value decreases, as V_{IN} increases due to DC bias effects. This has no significant impact on regulator performance.

Thermal Considerations

Heat is removed from the IC through the solder bumps to the PCB copper. The junction-to-ambient thermal resistance (θ_{JA}) is largely a function of the PCB layout (size, copper weight, and trace width) and the temperature rise from junction to ambient (Δ T).

For the FAN53202UC, θ_{JA} is 38°C/W when mounted on its four-layer evaluation board in still air with two-ounce outer layer copper weight and one-ounce inner layers. Halving the copper thickness results in an increased θ_{JA} of 48°C/W.

For long-term reliable operation, the IC's junction temperature (T_J) should be maintained below 125°C.

To calculate maximum operating temperature (\leq 125°C) for a specific application:

- 1. Use efficiency graphs to determine efficiency for the desired V_{IN} , V_{OUT} , and load conditions.
- 2. Calculate total power dissipation using:

$$P_{T} = V_{OUT} \times I_{LOAD} \times \left(\frac{1}{\eta} - 1\right)$$
(8)

where η is efficiency from Figure 3 and Figure 4.

Recommended External Components

Table 8. Recommended Capacitors

Component	Quantity	Vendor	Vendor	C (μF)	Size	Rated
C _{OUT}	2 Pieces	C2012X5R0J226M	TDK	22	0805	6.3 V
C _{IN}	1 Piece	C2012X5R1A106M	TDK	10	0805	6.3 V

Table 9. Recommended Inductors

Manufacturer	Part#	L (nH)	DCR (mΩ)	$I_{SAT}^{(4)}$	L	w	н
TOKO ⁽⁴⁾	DFE201610E-R47M	470	16	6.3	2.0	1.6	1.0
ТОКО	DFE252012F_R33M	330	14	8.5	2.5	2.0	1.2
ТОКО	FDSD0412-H-R33M	330	16	10	4.0	4.0	1.2
Mag. Layers	MMD-04ABNR33M-M1-RU	330	12.5	7.5	4.5	4.1	1.2
CYNTEC	PIMB041B-R33MS	330	17	8.4	4.4	4.2	1.0
TDK	VLC5020T-R47M	470	15	5.4	5.0	5.0	2.0

Note:

4. This inductor is recommended for applications with I_{OUT} < 3 A.

© 2015 Fairchild Semiconductor Corporation FAN53202 • Rev. 1.0

Estimate inductor copper losses using: $R = 1 - \frac{2}{3} + \frac{2}{3$

$$P_{L} = I_{LOAD}^{2} \times DCR_{L}$$
(9)

3. Determine IC losses by removing inductor losses (step 3) from total dissipation:


$$P_{\rm IC} = P_{\rm T} - P_{\rm L} \tag{10}$$


4. Determine device operating temperature:


$$\Delta T = P_{iC} \times \Theta_{JA}$$
and
$$(11)$$


$$T_{iC} = T_{A} + \Delta T$$

It is important to note that the $R_{DS(ON)}$ of the IC's power MOSFETs increases linearly with temperature at about 1.21%/°C. This causes the efficiency (η) to degrade with increasing die temperature.

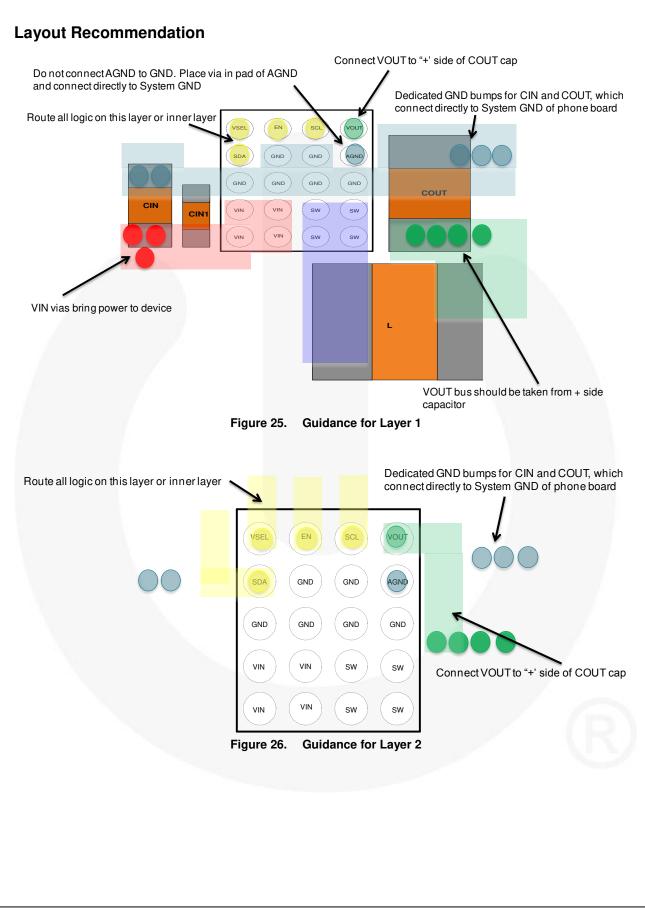

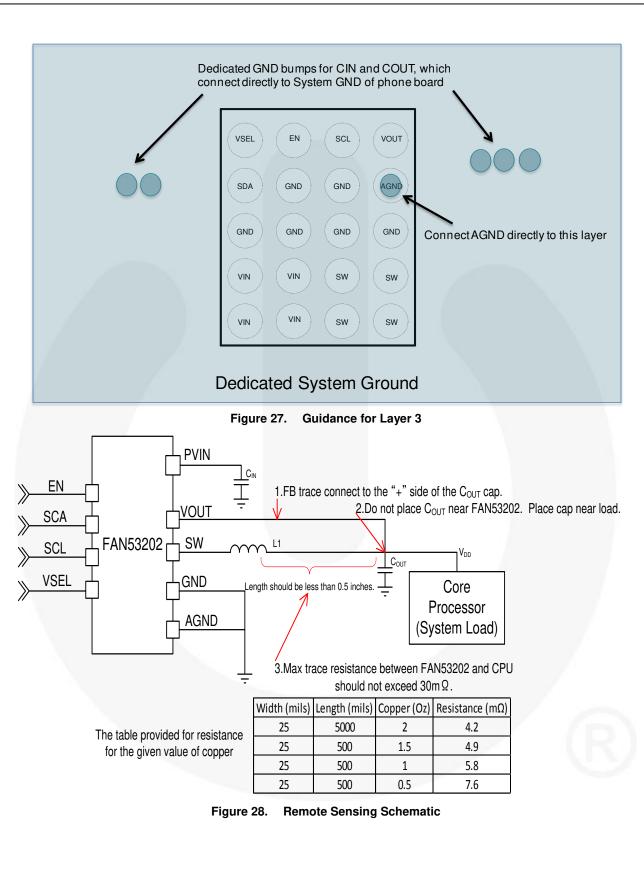

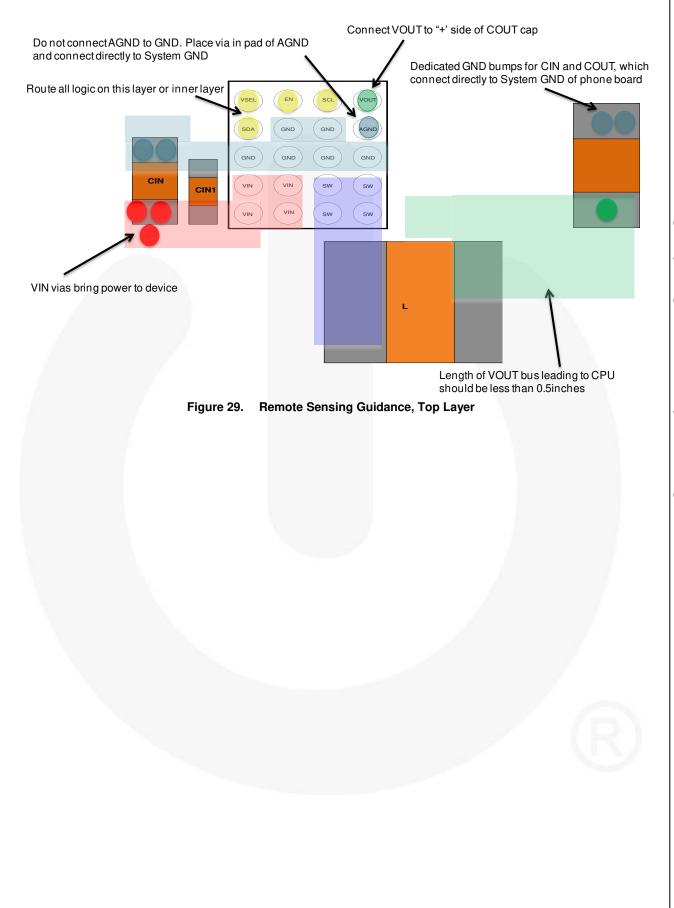

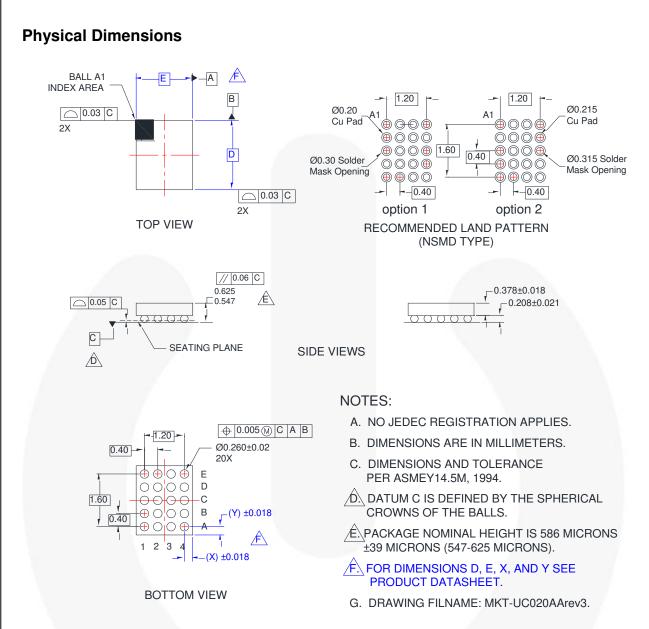



Product-Specific Dimensions

Product	D	E	X	Y
FAN53202UC23X	2.015 ±0.03	1.615 ±0.03	0.2075	0.2075

FAN53202 ----

G

A, 2.4 MHz, Digitally Programmable TinyBuck[®] Regulator

FAIRCHILD.			
RADEMARKS			
The following includes register Intended to be an exhaustive li		marks, owned by Fairchild Semiconductor and/or its glob	al subsidiaries, and is not
tended to be an exhaustive i \ccuPower™	F-PFS™	OPTOPLANAR®	SYSTEM
AttitudeEngine™	FRFET [®]	715	
winda [®]	Global Power Resource SM	0	TinyBoost®
X-CAP [®] * BitSiC™	GreenBridge™ Green FPS™	Power Supply WebDesigner™	TinyBuck [®] TinyCalc™
Build it Now™	Green FPS™ e-Series™	PowerTrench [®] PowerXS™	
CorePLUS™	Gmax™	Programmable Active Droop™	TINYOPTO™
CorePOWER™	GTO™	QFET®	TinyPower™
CROSSVOLT™ CTL™	IntelliMAX [™]	QS™ Quiet Series™	TinyPWM™ TinyWire™
Current Transfer Logic™	ISOPLANAR™ Making Small Speakers Sound Lo		TranSiC™
DEUXPEED®	and Better™		TriFault Detect™ _
Dual Cool™ EcoSPARK [®]	MegaBuck™	Saving our world, 1mW/W/kW at a time™	TRUECURRENT®*
ECOSPARK [™]	MICROCOUPLER™ MicroFET™	SignalWise™	µSerDes™
ESBC™	MicroPak™	SmartMax™	SerDes"
F ®	MicroPak2™	SMART START™ Solutions for Your Success™	UHC®
airchild®	MillerDrive™	Solutions for Your Success'''' SPM [®]	Ultra FRFET™
airchild Semiconductor®	MotionMax™ MotionGrid [®]	STEALTH™	UniFET™ VCX™
ACT Quiet Series™ ACT®	MTi®	SuperFET®	VisualMax™
ACT AST [®]	MTx [®] _	SuperSOT™-3 SuperSOT™-6	VoltagePlus™
ast∨Core™	MVN®	SuperSOT™-8	XS™
ETBench™	mWSaver [®] OptoHiT™	SupreMOS®	Xsens™ 仙童™
PS™	OPTOLOGIC®	SyncFET™ Sync-Lock™	三世 半 "
DISCLAIMER FAIRCHILD SEMICONDUCTOR RELIABILITY, FUNCTION, OF AT <u>HTTP://WWW.FAIRCHILD</u>	R DESIGN. TO OBTAIN THE LATEST, MOS SEMI.COM. FAIRCHILD DOES NOT ASSU	ANGES WITHOUT FURTHER NOTICE TO ANY PRODU IT UP-TO-DATE DATASHEET AND PRODUCT INFORM IME ANY LIABILITY ARISING OUT OF THE APPLICATIC	ATION, VISIT OUR WEBSITE DN OR USE OF ANY
DISCLAIMER AIRCHILD SEMICONDUCTOR RELIABILITY, FUNCTION, OF T <u>HTTP://WWW.FAIRCHILD</u> RODUCT OR CIRCUIT DES THESE SPECIFICATIONS DO	DR RESERVES THE RIGHT TO MAKE CH/ R DESIGN. TO OBTAIN THE LATEST, MOS <u>SEMI.COM.</u> FAIRCHILD DOES NOT ASSU CRIBED HEREIN; NEITHER DOES IT COM D NOT EXPAND THE TERMS OF FAIRCHI	ANGES WITHOUT FURTHER NOTICE TO ANY PRODU IT UP-TO-DATE DATASHEET AND PRODUCT INFORM	ATION, VISIT OUR WEBSITE DN OR USE OF ANY R THE RIGHTS OF OTHERS.
DISCLAIMER AIRCHILD SEMICONDUCTO RELIABILITY, FUNCTION, OF AT <u>HTTP://WWW.FAIRCHILD</u> PRODUCT OR CIRCUIT DES THESE SPECIFICATIONS DO THEREIN, WHICH COVERS IFE SUPPORT POLICY AIRCHILD'S PRODUCTS AI EXPRESS WRITTEN APPRO	OR RESERVES THE RIGHT TO MAKE CH/ R DESIGN. TO OBTAIN THE LATEST, MOS <u>SEMI.COM.</u> FAIRCHILD DOES NOT ASSU ICRIBED HEREIN; NEITHER DOES IT CON D NOT EXPAND THE TERMS OF FAIRCHII THESE PRODUCTS.	ANGES WITHOUT FURTHER NOTICE TO ANY PRODU IT UP-TO-DATE DATASHEET AND PRODUCT INFORM IME ANY LIABILITY ARISING OUT OF THE APPLICATIC IVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NO LD'S WORLDWIDE TERMS AND CONDITIONS, SPECIF	ATION, VISIT OUR WEBSITE ON OR USE OF ANY R THE RIGHTS OF OTHERS. FICALLY THE WARRANTY
DISCLAIMER ARCHILD SEMICONDUCT RELIABILITY, FUNCTION, OF AT <u>HTTP://WWW.FAIRCHILD</u> RODUCT OR CIRCUIT DES THESE SPECIFICATIONS DC THEREIN, WHICH COVERS IFE SUPPORT POLICY ARCHILD'S PRODUCTS AI EXPRESS WRITTEN APPRC As used herein: 1. Life support devices or intended for surgical life, and (c) whose accordance with instru	OR RESERVES THE RIGHT TO MAKE CHA R DESIGN. TO OBTAIN THE LATEST, MOS SEMI.COM, FAIRCHILD DOES NOT ASSU ORIBED HEREIN; NEITHER DOES IT CON D NOT EXPAND THE TERMS OF FAIRCHII THESE PRODUCTS. RE NOT AUTHORIZED FOR USE AS CRIT	ANGES WITHOUT FURTHER NOTICE TO ANY PRODU IT UP-TO-DATE DATASHEET AND PRODUCT INFORM IME ANY LIABILITY ARISING OUT OF THE APPLICATION IVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NO LD'S WORLDWIDE TERMS AND CONDITIONS, SPECIF FICAL COMPONENTS IN LIFE SUPPORT DEVICES OF CORPORATION. (a) are 2. A critical component in any component system whose failure to perform can sed in cause the failure of the life support devices of the life support dev	ATION, VISIT OUR WEBSITE NOR USE OF ANY R THE RIGHTS OF OTHERS. ICALLY THE WARRANTY R SYSTEMS WITHOUT THE t of a life support, device, or be reasonably expected to
DISCLAIMER AIRCHILD SEMICONDUCT RELIABILITY, FUNCTION, OF T <u>HTTP://WWW.FAIRCHILD</u> PRODUCT OR CIRCUIT DES HESE SPECIFICATIONS DC HEREIN, WHICH COVERS IFE SUPPORT POLICY AIRCHILD'S PRODUCTS AI EXPRESS WRITTEN APPRC as used herein: 1. Life support devices or intended for surgical in life, and (c) whose accordance with instru reasonably expected to	OR RESERVES THE RIGHT TO MAKE CHA R DESIGN. TO OBTAIN THE LATEST, MOS <u>SEMI.COM</u> , FAIRCHILD DOES NOT ASSU ORIBED HEREIN; NEITHER DOES IT CON D NOT EXPAND THE TERMS OF FAIRCHIL THESE PRODUCTS. RE NOT AUTHORIZED FOR USE AS CRIT OVAL OF FAIRCHILD SEMICONDUCTOR (systems are devices or systems which, mplant into the body or (b) support or failure to perform when properly us ctions for use provided in the labeling, presult in a significant injury of the user.	ANGES WITHOUT FURTHER NOTICE TO ANY PRODU IT UP-TO-DATE DATASHEET AND PRODUCT INFORM IME ANY LIABILITY ARISING OUT OF THE APPLICATION IVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NO LD'S WORLDWIDE TERMS AND CONDITIONS, SPECIF FICAL COMPONENTS IN LIFE SUPPORT DEVICES OF CORPORATION. (a) are 2. A critical component in any component system whose failure to perform can sed in cause the failure of the life support devices of the life support dev	ATION, VISIT OUR WEBSITE NOR USE OF ANY R THE RIGHTS OF OTHERS. ICALLY THE WARRANTY R SYSTEMS WITHOUT THE t of a life support, device, or be reasonably expected to
DISCLAIMER AIRCHILD SEMICONDUCTO RELIABILITY, FUNCTION, OF THTP://WWW.FAIRCHILD RODUCT OR CIRCUIT DES HESE SPECIFICATIONS DO HEREIN, WHICH COVERS IFE SUPPORT POLICY AIRCHILD'S PRODUCTS AIRCHILD'S PRODUCTS AIRCHILD'S PRODUCTS Sused herein: 1. Life support devices or intended for surgical in life, and (c) whose accordance with instru reasonably expected to NTI-COUNTERFEITING P Fairchild Semiconductor Corpo	OR RESERVES THE RIGHT TO MAKE CHA R DESIGN. TO OBTAIN THE LATEST, MOS <u>SEMI.COM</u> , FAIRCHILD DOES NOT ASSU ORIBED HEREIN; NEITHER DOES IT CON D NOT EXPAND THE TERMS OF FAIRCHIL THESE PRODUCTS. RE NOT AUTHORIZED FOR USE AS CRIT VVAL OF FAIRCHILD SEMICONDUCTOR OF systems are devices or systems which, mplant into the body or (b) support or failure to perform when properly us ctions for use provided in the labeling, o result in a significant injury of the user. OLICY pration's Anti-Counterfeiting Policy. Fairchild'	ANGES WITHOUT FURTHER NOTICE TO ANY PRODU IT UP-TO-DATE DATASHEET AND PRODUCT INFORM IME ANY LIABILITY ARISING OUT OF THE APPLICATION VEY ANY LICENSE UNDER ITS PATENT RIGHTS, NO LD'S WORLDWIDE TERMS AND CONDITIONS, SPECIF FICAL COMPONENTS IN LIFE SUPPORT DEVICES OF CORPORATION. (a) are 2. A critical component in any component sustain system whose failure to perform can sed in cause the failure of the life support devices can be safety or effectiveness. s Anti-Counterfeiting Policy is also stated on our external w	ATION, VISIT OUR WEBSITE DN OR USE OF ANY R THE RIGHTS OF OTHERS. FICALLY THE WARRANTY R SYSTEMS WITHOUT THE t of a life support, device, or be reasonably expected to vice or system, or to affect its website, www.fairchildsemi.com,
DISCLAIMER AIRCHILD SEMICONDUCTO RELIABILITY, FUNCTION, OF AT <u>HTTP://WWW.FAIRCHILD</u> RODUCT OR CIRCUIT DES HESE SPECIFICATIONS DO THEREIN, WHICH COVERS AIRCHILD'S PRODUCTS AI EXPRESS WRITTEN APPRO AS used herein: 1. Life support devices or intended for surgical in life, and (c) whose accordance with instru reasonably expected to INTI-COUNTERFEITING P Fairchild Semiconductor Corpunder Sales Support. Counterfeiting of semiconductor arts. Customers who inadvert piplications, and increased co	OR RESERVES THE RIGHT TO MAKE CH/ R DESIGN. TO OBTAIN THE LATEST, MOS <u>SEMI.COM.</u> FAIRCHILD DOES NOT ASSU ORIBED HEREIN; NEITHER DOES IT CON D NOT EXPAND THE TERMS OF FAIRCHIL THESE PRODUCTS. RE NOT AUTHORIZED FOR USE AS CRIT VVAL OF FAIRCHILD SEMICONDUCTOR OF systems are devices or systems which, mplant into the body or (b) support or s failure to perform when properly us ctions for use provided in the labeling, or presult in a significant injury of the user. OLICY pration's Anti-Counterfeiting Policy. Fairchild' or parts is a growing problem in the industry. tently purchase counterfeit parts experience s of production and manufacturing delays. F s. Fairchild strongly encourages customers to	ANGES WITHOUT FURTHER NOTICE TO ANY PRODU IT UP-TO-DATE DATASHEET AND PRODUCT INFORM IME ANY LIABILITY ARISING OUT OF THE APPLICATION IME ANY LICENSE UNDER ITS PATENT RIGHTS, NO LD'S WORLDWIDE TERMS AND CONDITIONS, SPECIF FICAL COMPONENTS IN LIFE SUPPORT DEVICES OF CORPORATION. (a) are 2. A critical component in any component sustain system whose failure to perform can sed in cause the failure of the life support devices can be safety or effectiveness. s Anti-Counterfeiting Policy is also stated on our external with All manufacturers of semiconductor products are experient many problems such as loss of brand reputation, substan "airchild is taking strong measures to protect ourselves an o purchase Fairchild parts either directly from Fairchild or f	ATION, VISIT OUR WEBSITE NOR USE OF ANY R THE RIGHTS OF OTHERS. ICALLY THE WARRANTY R SYSTEMS WITHOUT THE t of a life support, device, or be reasonably expected to vice or system, or to affect its website, www.fairchildsemi.com, ncing counterfeiting of their dard performance, failed d our customers from the from Authorized Fairchild
DISCLAIMER AIRCHILD SEMICONDUCTO ELIABILITY, FUNCTION, OF T HTTP://WWW.FAIRCHILD RODUCT OR CIRCUIT DES HESE SPECIFICATIONS DO HEREIN, WHICH COVERS IFE SUPPORT POLICY AIRCHILD'S PRODUCTS AI XPRESS WRITTEN APPRO Is used herein: 1. Life support devices or intended for surgical in life, and (c) whose accordance with instru reasonably expected to NTI-COUNTERFEITING P airchild Semiconductor Corpo nder Sales Support. Counterfeiting of semiconductor ats. Customers who inadvert pplications, and increased co roliferation of counterfeit parts distributors who are listed by o re genuine parts, have full tra- iarchild will not provide any w	OR RESERVES THE RIGHT TO MAKE CHA R DESIGN. TO OBTAIN THE LATEST, MOS SEMI.COM, FAIRCHILD DOES NOT ASSU ORIBED HEREIN; NEITHER DOES IT CON D NOT EXPAND THE TERMS OF FAIRCHIL THESE PRODUCTS. RE NOT AUTHORIZED FOR USE AS CRIT VAL OF FAIRCHILD SEMICONDUCTOR OF systems are devices or systems which, mplant into the body or (b) support or s failure to perform when properly us citions for use provided in the labeling, or presult in a significant injury of the user. OLICY pration's Anti-Counterfeiting Policy. Fairchild' or parts is a growing problem in the industry. tently purchase counterfeit parts experience st of production and manufacturing delays. Fs. Fairchild strongly encourages customers to country on our web page cited above. Produc ceability, meet Fairchild's quality standards fn ild and our Authorized Distributors will stanc arranty coverage or other assistance for part	ANGES WITHOUT FURTHER NOTICE TO ANY PRODU IT UP-TO-DATE DATASHEET AND PRODUCT INFORM IME ANY LIABILITY ARISING OUT OF THE APPLICATION INEY ANY LICENSE UNDER ITS PATENT RIGHTS, NO LD'S WORLDWIDE TERMS AND CONDITIONS, SPECIF FICAL COMPONENTS IN LIFE SUPPORT DEVICES OF CORPORATION. (a) are 2. A critical component in any component system whose failure to perform can sed in cause the failure of the life support devices of can be safety or effectiveness. s Anti-Counterfeiting Policy is also stated on our external violation, substant any problems such as loss of brand reputation, substant Fairchild is taking strong measures to protect ourselves an	ATION, VISIT OUR WEBSITE NOR USE OF ANY R THE RIGHTS OF OTHERS. ICALLY THE WARRANTY SYSTEMS WITHOUT THE t of a life support, device, or be reasonably expected to ice or system, or to affect its website, www.fairchildsemi.com, ncing counterfeiting of their dard performance, failed d our customers from the rom Authorized Fairchild thorized Fairchild Distributors full range of up-to-date technical warranty issues that may arise.
DISCLAIMER ARCHILD SEMICONDUCT RELIABILITY, FUNCTION, OF THTTP://WWW.FAIRCHILD PRODUCT OR CIRCUIT DESD HESE SPECIFICATIONS DO HEREIN, WHICH COVERS IFE SUPPORT POLICY ARCHILD'S PRODUCTS AI EXPRESS WRITTEN APPRO Sused herein: 1. Life support devices or intended for surgical life, and (c) whose accordance with instru reasonably expected to NTI-COUNTERFEITING P airchild Semiconductor Corpo nder Sales Support. Counterfeiting of semiconduct rafts. Customers who inadver pplications, and increased co roliferation of counterfeit parts Distributors who are listed by or regenuine parts, have full tra ind product information. Faircl airchild will not provide any w roblem and encourage our or PRODUCT STATUS DEFIN	OR RESERVES THE RIGHT TO MAKE CHA R DESIGN. TO OBTAIN THE LATEST, MOS SEMI.COM, FAIRCHILD DOES NOT ASSU CRIBED HEREIN; NEITHER DOES IT CON D NOT EXPAND THE TERMS OF FAIRCHIL THESE PRODUCTS. RE NOT AUTHORIZED FOR USE AS CRIT VAL OF FAIRCHILD SEMICONDUCTOR OF systems are devices or systems which, mplant into the body or (b) support or s failure to perform when properly us ctions for use provided in the labeling, or result in a significant injury of the user. YOLICY to parts is a growing problem in the industry. tently purchase counterfeit parts experience st of production and manufacturing delays. F is, Fairchild strongly encourages customers to country on our web page cited above. Produc caranty coverage or other assistance for part ustomers to do their part in stopping this prace	ANGES WITHOUT FURTHER NOTICE TO ANY PRODU IT UP-TO-DATE DATASHEET AND PRODUCT INFORM IME ANY LIABILITY ARISING OUT OF THE APPLICATION IME ANY LICENSE UNDER ITS PATENT RIGHTS, NO LD'S WORLDWIDE TERMS AND CONDITIONS, SPECIF FICAL COMPONENTS IN LIFE SUPPORT DEVICES OF CORPORATION. (a) are 2. A critical component in any component system whose failure to perform can sed in cause the failure of the life support devices can be safety or effectiveness. s Anti-Counterfeiting Policy is also stated on our external with All manufacturers of semiconductor products are experient many problems such as loss of brand reputation, substan a purchase Fairchild parts either directly from Fairchild or ts customers buy either from Fairchild directly or from Auf or handling and storage and provide access to Fairchilds of the beind all warranties and will appropriately address any ts bought from Unauthorized Sources. Fairchild is commit	ATION, VISIT OUR WEBSITE NOR USE OF ANY R THE RIGHTS OF OTHERS. ICALLY THE WARRANTY SYSTEMS WITHOUT THE t of a life support, device, or be reasonably expected to ice or system, or to affect its website, www.fairchildsemi.com, ncing counterfeiting of their dard performance, failed d our customers from the rom Authorized Fairchild thorized Fairchild Distributors full range of up-to-date technical warranty issues that may arise.
DISCLAIMER ARCHILD SEMICONDUCT RELIABILITY, FUNCTION, OF THTTP://WWW.FAIRCHILD RODUCT OR CIRCUIT DES HESE SPECIFICATIONS DO HEREIN, WHICH COVERS IFE SUPPORT POLICY ARCHILD'S PRODUCTS AI EXPRESS WRITTEN APPRO Sused herein: 1. Life support devices or intended for surgical in life, and (c) whose accordance with instru reasonably expected to NTI-COUNTERFEITING P airchild Semiconductor Corpunder Sales Support. Counterfeiting of semiconduct rafts. Customers who inadver pplications, and increased co roliferation of counterfeit parts Distributors who are listed by or regenuine parts, have full tra ind product information. Faircl airchild will not provide any w roblem and encourage our or CRODUCT STATUS DEFIN	OR RESERVES THE RIGHT TO MAKE CHA R DESIGN. TO OBTAIN THE LATEST, MOS SEMI.COM, FAIRCHILD DOES NOT ASSU CRIBED HEREIN; NEITHER DOES IT CON D NOT EXPAND THE TERMS OF FAIRCHIL THESE PRODUCTS. RE NOT AUTHORIZED FOR USE AS CRIT VAL OF FAIRCHILD SEMICONDUCTOR OF systems are devices or systems which, mplant into the body or (b) support or s failure to perform when properly us ctions for use provided in the labeling, or result in a significant injury of the user. YOLICY to parts is a growing problem in the industry. tently purchase counterfeit parts experience st of production and manufacturing delays. F is, Fairchild strongly encourages customers to country on our web page cited above. Produc caranty coverage or other assistance for part ustomers to do their part in stopping this prace	ANGES WITHOUT FURTHER NOTICE TO ANY PRODU IT UP-TO-DATE DATASHEET AND PRODUCT INFORM IME ANY LIABILITY ARISING OUT OF THE APPLICATION IME ANY LICENSE UNDER ITS PATENT RIGHTS, NO LD'S WORLDWIDE TERMS AND CONDITIONS, SPECIF FICAL COMPONENTS IN LIFE SUPPORT DEVICES OF CORPORATION. (a) are 2. A critical component in any component system whose failure to perform can sed in cause the failure of the life support devices can be safety or effectiveness. s Anti-Counterfeiting Policy is also stated on our external with All manufacturers of semiconductor products are experient many problems such as loss of brand reputation, substan a purchase Fairchild parts either directly from Fairchild or ts customers buy either from Fairchild directly or from Auf or handling and storage and provide access to Fairchilds of the beind all warranties and will appropriately address any ts bought from Unauthorized Sources. Fairchild is commit	ATION, VISIT OUR WEBSITE NOR USE OF ANY R THE RIGHTS OF OTHERS. ICALLY THE WARRANTY SYSTEMS WITHOUT THE t of a life support, device, or be reasonably expected to ice or system, or to affect its website, www.fairchildsemi.com, ncing counterfeiting of their dard performance, failed d our customers from the rom Authorized Fairchild thorized Fairchild Distributors full range of up-to-date technical warranty issues that may arise.
DISCLAIMER ARCHILD SEMICONDUCT RELIABILITY, FUNCTION, OF THTTP://WWW.FAIRCHILD RODUCT OR CIRCUIT DES HESE SPECIFICATIONS DO HEREIN, WHICH COVERS IFE SUPPORT POLICY ARCHILD'S PRODUCTS AI EXPRESS WRITTEN APPRO Sused herein: 1. Life support devices or intended for surgical in life, and (c) whose accordance with instru reasonably expected to NTI-COUNTERFEITING P airchild Semiconductor Corpunder Sales Support. Counterfeiting of semiconduct rafts. Customers who inadver pplications, and increased co roliferation of counterfeit parts Distributors who are listed by or regenuine parts, have full tra ind product information. Faircl airchild will not provide any w roblem and encourage our or CRODUCT STATUS DEFIN	CR RESERVES THE RIGHT TO MAKE CHAR DESIGN. TO OBTAIN THE LATEST, MOSS SEMI.COM, FAIRCHILD DOES NOT ASSU CRIBED HEREIN; NEITHER DOES IT CONDON TAYSU ON DOT EXPAND THE TERMS OF FAIRCHIL THESE PRODUCTS. RE NOT AUTHORIZED FOR USE AS CRIT WAL OF FAIRCHILD SEMICONDUCTOR OF systems are devices or systems which, mplant into the body or (b) support or stations for use provided in the labeling, or result in a significant injury of the user. OLICY To parts is a growing problem in the industry, tently purchase counterfeiting Policy. Fairchild' or parts is a growing problem in the industry. Est of production and manufacturing delays. For actions for use provided in the industry. The production and manufacturing delays. For so faild strongly encourages customers to country on our web page cited above. Produc ceability, meet Fairchild's quality standards for fild and our Authorized Distributors will stance arranty coverage or other assistance for part istomers to do their part in stopping this prace ITTONS Product Status Formative / In Design Datasheet cont in any manner of the parts in stopping the state of the states in any manner of the states of the stat	ANGES WITHOUT FURTHER NOTICE TO ANY PRODU IT UP-TO-DATE DATASHEET AND PRODUCT INFORM IME ANY LIABILITY ARISING OUT OF THE APPLICATION IME ANY LICENSE UNDER ITS PATENT RIGHTS, NO LD'S WORLDWIDE TERMS AND CONDITIONS, SPECIF FICAL COMPONENTS IN LIFE SUPPORT DEVICES OF CORPORATION. (a) are 2. A critical component in any component system whose failure to perform can sed in cause the failure of the life support devices of can be safety or effectiveness. s Anti-Counterfeiting Policy is also stated on our external with All manufacturers of semiconductor products are experient many problems such as loss of brand reputation, substan a customers buy either from Fairchild directly or from Aution or handling and storage and provide access to Fairchilds of the low and will appropriately address any ts bought from Unauthorized Sources. Fairchild is commit tice by buying direct or from authorized distributors. Definition ains the design specifications for product development without notice.	ATION, VISIT OUR WEBSITE NOR USE OF ANY R THE RIGHTS OF OTHERS. ICALLY THE WARRANTY R SYSTEMS WITHOUT THE t of a life support, device, or be reasonably expected to ide or system, or to affect its website, www.fairchildsemi.com, noing counterfeiting of their dard performance, failed d our customers from the rom Authorized Fairchild thorized Fairchild Distributors full range of up-to-date technical warranty issues that may arise. ted to combat this global
DISCLAIMER AIRCHILD SEMICONDUCT RELIABILITY, FUNCTION, OF AT HTTP://WWW.FAIRCHILD PRODUCT OR CIRCUIT DES INESE SPECIFICATIONS DO THEREIN, WHICH COVERS' IFE SUPPORT POLICY AIRCHILD'S PRODUCTS AI EXPRESS WRITTEN APPRO As used herein: 1. Life support devices or intended for surgical in life, and (c) whose accordance with instru- reasonably expected to ANTICOUNTERFEITING P Fairchild Semiconductor Corp- under Sales Support. Counterfeiting of semiconductor bitributors who are listed by co- are genuine parts, have full tra- and product information. Faircf Fairchild will not provide any woroblem and encourage our co- PRODUCT STATUS DEFIN Definition of Terms Datasheet Identification	CR RESERVES THE RIGHT TO MAKE CHA R DESIGN. TO OBTAIN THE LATEST, MOS SEMI_COM, FAIRCHILD DOES NOT ASSU CRIBED HEREIN; NEITHER DOES IT CON D NOT EXPAND THE TERMS OF FAIRCHIL THESE PRODUCTS. RE NOT AUTHORIZED FOR USE AS CRIT OVAL OF FAIRCHILD SEMICONDUCTOR of systems are devices or systems which, mplant into the body or (b) support or s failure to perform when properly us ctions for use provided in the labeling, to result in a significant injury of the user. OLICY contion's Anti-Counterfeiting Policy. Fairchild' or parts is a growing problem in the industry. tently purchase counterfeit parts experience st of production and manufacturing delays. F s. Fairchild strongly encourages customers to country on our web page cited above. Produc ceability, meet Fairchild's quality standards f nild and our Authorized Distributors will stand arranty coverage or other assistance for part istomers to do their part in stopping this prace ITTONS Formative / In Design Datasheet cont in any manner of First Production Datasheet cont Semiconductor	ANGES WITHOUT FURTHER NOTICE TO ANY PRODU IT UP-TO-DATE DATASHEET AND PRODUCT INFORM IME ANY LIABILITY ARISING OUT OF THE APPLICATION INEY ANY LICENSE UNDER ITS PATENT RIGHTS, NO LD'S WORLDWIDE TERMS AND CONDITIONS, SPECIF FICAL COMPONENTS IN LIFE SUPPORT DEVICES OF CORPORATION. (a) are 2. A critical component in any component system whose failure to perform can sed in cause the failure of the life support devices of can be safety or effectiveness. s Anti-Counterfeiting Policy is also stated on our external with All manufacturers of semiconductor products are experient many problems such as loss of brand reputation, substan airchild is taking strong measures to protect ourselves an o purchase Fairchild parts either directly from Fairchild or for ts customers buy either from Fairchild directly or from Audition or handling and storage and provide access to Fairchild's the bought from Unauthorized Sources. Fairchild is commit tice by buying direct or from authorized distributors. Definition ains the design specifications for product development without notice. ains preliminary data; supplementary data will be pub reserves the right to make changes at any time without reserves the right to make changes at any time without reserves the right to make changes at any time without stop on the direction for product development without notice.	ATION, VISIT OUR WEBSITE NOR USE OF ANY R THE RIGHTS OF OTHERS. ICALLY THE WARRANTY SYSTEMS WITHOUT THE t of a life support, device, or be reasonably expected to ice or system, or to affect its website, www.fairchildsemi.com, ncing counterfeiting of their dard performance, failed d our customers from the rom Authorized Fairchild thorized Fairchild Distributors full range of up-to-date technical warranty issues that may arise. ted to combat this global nt. Specifications may change lished at a later date. Fairchild put notice to improve design.
DISCLAIMER ARCHILD SEMICONDUCT RELIABILITY, FUNCTION, OF AT <u>HTTP://WWW.FAIRCHILD</u> RODUCT OR CIRCUIT DES THESE SPECIFICATIONS DO THEREIN, WHICH COVERS IFE SUPPORT POLICY ARCHILD'S PRODUCTS AI EXPRESS WRITTEN APPRO As used herein: 1. Life support devices or intended for surgical life, and (c) whose accordance with instru- reasonably expected to ANTI-COUNTERFEITING P Fairchild Semiconductor Corpo- inder Sales Support. Counterfeiting of semiconduct applications, and increased co proliferation of counterfeit parts Distributors who are listed by our are genuine parts, have full tra and product information. Faircl airchild will not provide any wo problem and encourage our ca PRODUCT STATUS DEFIN Definition of Terms Datasheet Identification Advance Information	CR RESERVES THE RIGHT TO MAKE CHA R DESIGN. TO OBTAIN THE LATEST, MOS SEMI_COM, FAIRCHILD DOES NOT ASSU CRIBED HEREIN; NEITHER DOES IT CON D NOT EXPAND THE TERMS OF FAIRCHIL THESE PRODUCTS. RE NOT AUTHORIZED FOR USE AS CRIT EVAL OF FAIRCHILD SEMICONDUCTOR (systems are devices or systems which, mplant into the body or (b) support or s failure to perform when properly us ctions for use provided in the labeling, to result in a significant injury of the user. FOLICY oration's Anti-Counterfeiting Policy. Fairchild' or parts is a growing problem in the industry. tently purchase counterfeit parts experience st of production and manufacturing delays. F is. Fairchild strongly encourages customers to country on our web page cited above. Produce cability, meet Fairchild's quality standards f hild and our Authorized Distributors will stand arranty coverage or other assistance for part istomers to do their part in stopping this prace ITTONS Product Status Formative / In Design First Production Eull Production Datasheet cont Semiconductor	ANGES WITHOUT FURTHER NOTICE TO ANY PRODU IT UP-TO-DATE DATASHEET AND PRODUCT INFORM IME ANY LIABILITY ARISING OUT OF THE APPLICATION IME ANY LIABILITY ARISING OUT OF THE APPLICATION INFORMATION INCENSE UNDER ITS PATENT RIGHTS, NO LD'S WORLDWIDE TERMS AND CONDITIONS, SPECIF FICAL COMPONENTS IN LIFE SUPPORT DEVICES OF CORPORATION. (a) are 2. A critical component in any component sustain system whose failure to perform can sed in cause the failure of the life support devices of cause the failure of the life support devices of s Anti-Counterfeiting Policy is also stated on our external with All manufacturers of semiconductor products are experient many problems such as loss of brand reputation, substan appurchase Fairchild parts either directly from Fairchild of ts customers buy either from Fairchild directly or from Auf or handling and storage and provide access to Fairchild's t behind all warranties and will appropriately address any ts bought from Unauthorized Sources. Fairchild is commit tice by buying direct or from authorized distributors. Definition ains the design specifications for product developmer without notice. ains preliminary data; supplementary data will be pub	ATION, VISIT OUR WEBSITE NOR USE OF ANY R THE RIGHTS OF OTHERS. ICALLY THE WARRANTY SYSTEMS WITHOUT THE t of a life support, device, or be reasonably expected to ice or system, or to affect its website, www.fairchildsemi.com, ncing counterfeiting of their dard performance, failed d our customers from the rom Authorized Fairchild thorized Fairchild Distributors full range of up-to-date technical warranty issues that may arise. ted to combat this global nt. Specifications may change lished at a later date. Fairchild put notice to improve design.

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC