# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Is Now Part of



# **ON Semiconductor**®

To learn more about ON Semiconductor, please visit our website at <u>www.onsemi.com</u>

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor dates sheds, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor dates sheds and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use on similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor and its officers, employees, subsidiaries, affliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out or i, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconduc



# FDPC8012S PowerTrench<sup>®</sup> Power Clip 25V Asymmetric Dual N-Channel MOSFET

### Features

Q1: N-Channel

■ Max  $r_{DS(on)}$  = 7.0 m $\Omega$  at  $V_{GS}$  = 4.5 V,  $I_D$  = 12 A

Q2: N-Channel

- $\blacksquare$  Max  $r_{DS(on)}$  = 2.2 m $\Omega$  at  $V_{GS}$  = 4.5 V,  $I_{D}$  = 23 A
- Low inductance packaging shortens rise/fall times, resulting in lower switching losses
- MOSFET integration enables optimum layout for lower circuit inductance and reduced switch node ringing
- RoHS Compliant




## **General Description**

This device includes two specialized N-Channel MOSFETs in a dual package. The switch node has been internally connected to enable easy placement and routing of synchronous buck converters. The control MOSFET (Q1) and synchronous SyncFET<sup>TM</sup> (Q2) have been designed to provide optimal power efficiency.

#### Applications

- Computing
- Communications
- General Purpose Point of Load

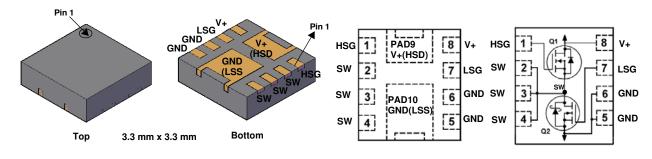

### MOSFET Maximum Ratings T<sub>A</sub> = 25 °C unless otherwise noted

Symbol	Parameter		Q1	Q2	Units	
V <sub>DS</sub>	Drain to Source Voltage		25	25	V	
V <sub>GS</sub>	Gate to Source Voltage		12	12	V	
ID	Drain Current -Continuous	T <sub>C</sub> = 25 °C	35	88	38	
	-Continuous	T <sub>A</sub> = 25 °C	13 <sup>1a</sup>	26 <sup>1b</sup>	А	
	-Pulsed	(Note 4)	40	120	1	
E <sub>AS</sub>	Single Pulse Avalanche Energy	(Note 3)	50	181	mJ	
D	Power Dissipation for Single Operation	T <sub>A</sub> = 25 °C	1.6 <sup>1a</sup>	2.0 <sup>1b</sup>	w	
P <sub>D</sub>	Power Dissipation for Single Operation $T_A = 25 \text{ °C}$ $0.8^{1c}$		0.9 <sup>1d</sup>	~ ~ ~		
TJ, T <sub>STG</sub>	Operating and Storage Junction Temperature Range		-55 to	+150	°C	

### **Thermal Characteristics**

$R_{ ext{ heta}JA}$	Thermal Resistance, Junction to Ambient	77 <sup>1a</sup>	63 <sup>1b</sup>	
$R_{ ext{ heta}JA}$	Thermal Resistance, Junction to Ambient	151 <sup>1c</sup>	135 <sup>1d</sup>	°C/W
$R_{\theta JC}$	Thermal Resistance, Junction to Case	5.0	3.5	

#### **Package Marking and Ordering Information**

Device Marking	Device	Package	Reel Size	Tape Width	Quantity
010D/030D	FDPC8012S	Power Clip 33	13 "	12 mm	3000 units

Ρ
Ω
8
Ö
X
D
9
Σ
Ō
4
Ξ'
ē
2
¥
Ē
Ŧ
č
ž
×.
¥
-
$\mathbf{n}$
Q
Clip

Symbol	Parameter	Test Conditions	Туре	Min	Тур	Мах	Units
Off Chara	octeristics						
BV <sub>DSS</sub>	Drain to Source Breakdown Voltage	$I_D = 250 \ \mu A, \ V_{GS} = 0 \ V$ $I_D = 1 \ m A, \ V_{GS} = 0 \ V$	Q1 Q2	25 25			V
$\Delta BV_{DSS} \Delta T_J$	Breakdown Voltage Temperature Coefficient	$I_D = 250 \ \mu$ A, referenced to 25 °C $I_D = 10 \ m$ A, referenced to 25 °C	Q1 Q2		18 22		mV/°C
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	$V_{DS} = 20 V, V_{GS} = 0 V$ $V_{DS} = 20 V, V_{GS} = 0 V$	Q1 Q2			1 500	μΑ μΑ
I <sub>GSS</sub>	Gate to Source Leakage Current, Forward		Q1 Q2			±100 ±100	nA nA
On Chara	cteristics						
V <sub>GS(th)</sub>	Gate to Source Threshold Voltage	$V_{GS} = V_{DS}$ , $I_D = 250 \ \mu A$ $V_{GS} = V_{DS}$ , $I_D = 1 \ m A$	Q1 Q2	0.8 1.1	1.3 1.6	2.2 2.2	V
$\frac{\Delta V_{GS(th)}}{\Delta T_J}$	Gate to Source Threshold Voltage Temperature Coefficient	$I_D = 250 \ \mu$ A, referenced to 25 °C $I_D = 10 \ m$ A, referenced to 25 °C	Q1 Q2		-4 -4		mV/°C
٢	on) Drain to Source On Resistance	$V_{GS} = 4.5 \text{ V}, I_D = 12 \text{ A}$ $V_{GS} = 4.5 \text{ V}, I_D = 12 \text{ A}, T_J = 125 \text{ °C}$	Q1		5.2 7.5	7.0 10.5	- mΩ
r <sub>DS(on)</sub>		$V_{GS} = 4.5 \text{ V}, \ I_D = 23 \text{ A}$ $V_{GS} = 4.5 \text{ V}, \ I_D = 23 \text{ A}, T_J = 125 \ ^\circ\text{C}$	Q2		1.6 2.3	2.2 3.2	
9 <sub>FS</sub>	Forward Transconductance	$V_{DS} = 5 V, I_D = 13 A$ $V_{DS} = 5 V, I_D = 26 A$	Q1 Q2		79 200		S
Dynamic	Characteristics						
C <sub>iss</sub>	Input Capacitance	Q1: V <sub>DS</sub> = 13 V, V <sub>GS</sub> = 0 V, f = 1 MHZ	Q1 Q2		1075 3456		pF
C <sub>oss</sub>	Output Capacitance	Q2:	Q1 Q2		250 885		pF
C <sub>rss</sub>	Reverse Transfer Capacitance	V <sub>DS</sub> = 13 V, V <sub>GS</sub> = 0 V, f = 1 MHZ	Q1 Q2		50 130		pF
R <sub>g</sub>	Gate Resistance		Q1 Q2	0.1 0.1	0.4 0.5	2.0 2.0	Ω
Switching	g Characteristics						
t <sub>d(on)</sub>	Turn-On Delay Time		Q1 Q2		6 12		ns
t <sub>r</sub>	Rise Time	Q1: $V_{DD} = 13 \text{ V}, \text{ I}_{D} = 13 \text{ A}, \text{ R}_{\text{GEN}} = 6 \Omega$	Q1 Q2		2 3		ns
t <sub>d(off)</sub>	Turn-Off Delay Time	Q2: V <sub>DD</sub> = 13 V, I <sub>D</sub> = 26 A, R <sub>GEN</sub> = 6 Ω	Q1 Q2		19 34		ns
t <sub>f</sub>	Fall Time	UD = 10 V, ID = 20 A, IIGEN = 0.32	Q1 Q2		2 3		ns
			1	1			

Total Gate Charge

Gate to Source Gate Charge

Gate to Drain "Miller" Charge

 $\mathsf{Q}_\mathsf{g}$ 

 $\mathsf{Q}_{\mathsf{gs}}$ 

 $\mathsf{Q}_{\mathsf{gd}}$ 

nC

nC

nC

2

 $V_{GS} = 0$  V to 4.5 V Q1

 $V_{DD} = 13 V,$  $I_{D} = 13 A$ Q2

 $V_{DD} = 13 V,$  $I_{D} = 26 A$  Q1

Q2

Q1

Q2

Q1

Q2

8

25

2.3


7.8

2.0


6.4

н
ĕ
ß
õ
12S
D
0 M
/er
Ę
e n
ē
B
Pc
W6
er
Ω
þ

Symbol	Parameter	Test Conditions	Туре	Min	Тур	Max	Units
Drain-Sou	urce Diode Characteristics						
V <sub>SD</sub>	Source to Drain Diode Forward Voltage		Q1 Q2		0.8 0.8	1.2 1.2	V
t <sub>rr</sub>	Reverse Recovery Time	Q1 I <sub>F</sub> = 13 A, di/dt = 100 A/µs	Q1 Q2		20 27	35 43	ns
Q <sub>rr</sub>	Reverse Recovery Charge	Q2 I <sub>F</sub> = 26 A, di/dt = 300 A/µs	Q1 Q2		6 27	12 43	nC

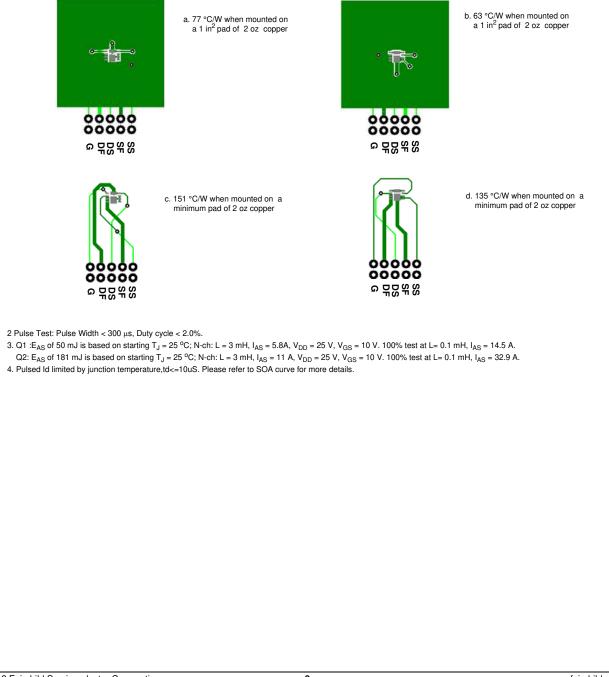



FDPC8012S PowerTrench<sup>®</sup> Power Clip

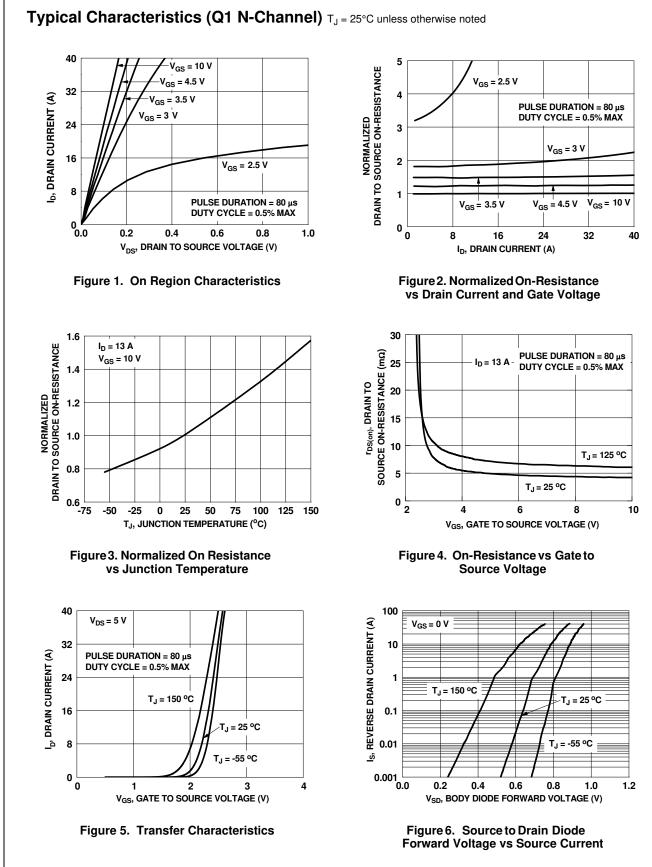


# ©2012 Fairchild Semiconductor Corporation



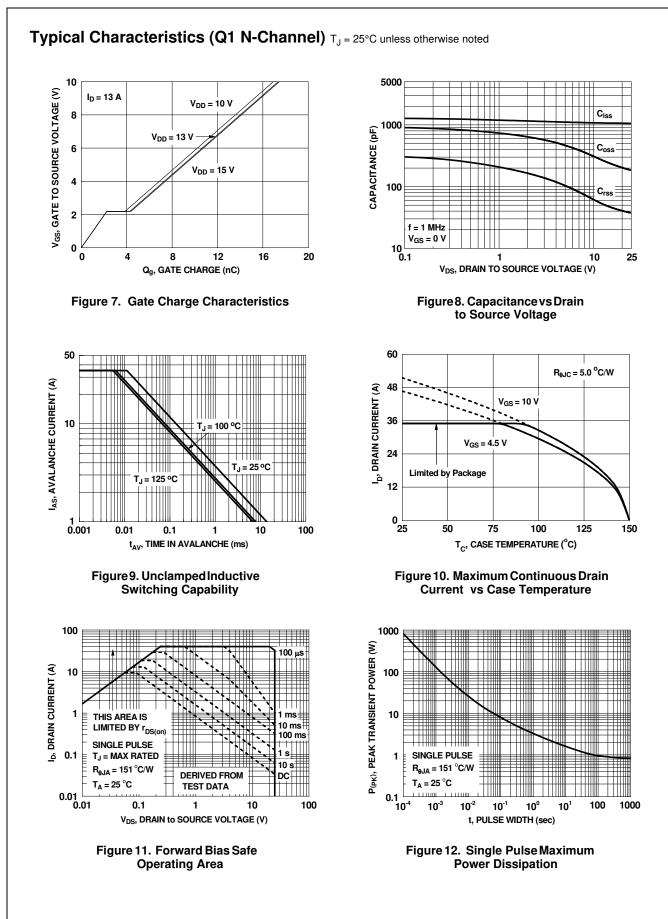


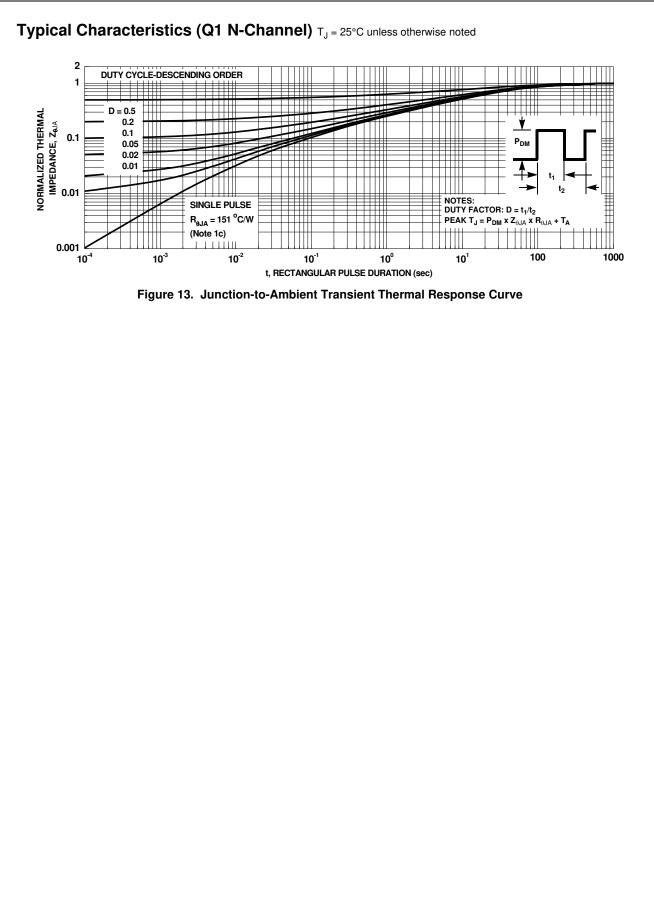



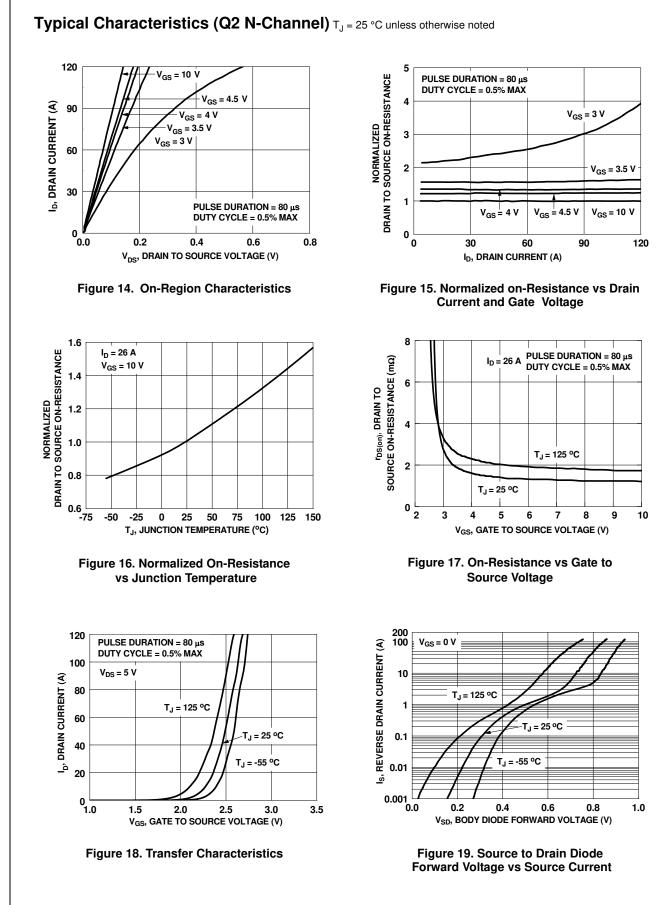

www.fairchildsemi.com

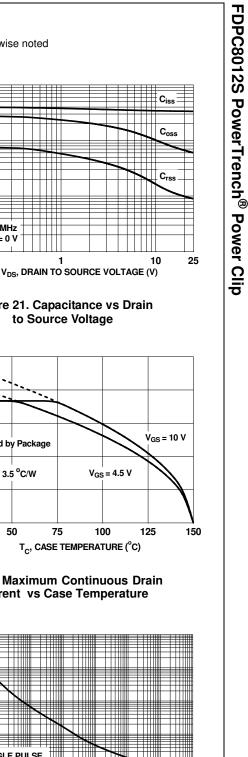

#### 10 10000 V<sub>GS</sub>, GATE TO SOURCE VOLTAGE (V) I<sub>D</sub> = 26 A V<sub>DD</sub> = 10 V 8 CAPACITANCE (pF) 001 002 V<sub>DD</sub> = 13 V 6 V<sub>DD</sub> = 15 V 4 2 f = 1 MHz V<sub>GS</sub> = 0 V 0 10└ 0.1 0 12 48 60 24 36 1 Qg, GATE CHARGE (nC) Figure 21. Capacitance vs Drain Figure 20. Gate Charge Characteristics to Source Voltage 300 120 I<sub>AS</sub>, AVALANCHE CURRENT (A) 01 01 I<sub>D</sub>, DRAIN CURRENT (A) 96 72 T.i = 100 °C Limited by Package 48 · = 25 $R_{\theta JC} = 3.5 \ ^{o}C/W$ 125 24 0 └ 25 1 L 0.001 50 0.01 10 100 75 0.1 1 t<sub>AV</sub>, TIME IN AVALANCHE (ms) Figure 22. Unclamped Inductive Figure 23. Maximum Continuous Drain **Current vs Case Temperature** Switching Capability 10000 200 100 P<sub>(PK)</sub>, PEAK TRANSIENT POWER (W) 100 µs 1000 I<sub>D</sub>, DRAIN CURRENT (A) 10 100 1 ms THIS AREA IS 10 ms 1 LIMITED BY r<sub>DS(on</sub> 10 100 ms SINGLE PULSE 1 s SINGLE PULSE T<sub>J</sub> = MAX RATED 0.1 1 R<sub>0JA</sub> = 135 °C/W 10 s R<sub>0JA</sub> = 135 °C/W DERIVED FROM DC T<sub>A</sub> = 25 °C TEST DATA T<sub>A</sub> = 25 °C 0.01 0.01 0.1 10 100 0.1 1 10<sup>-3</sup> 10<sup>-2</sup> 10<sup>-4</sup> 10<sup>-1</sup> V<sub>DS</sub>, DRAIN to SOURCE VOLTAGE (V) t, PULSE WIDTH (sec) Figure 24. Forward Bias Safe Figure 25. Single Pulse Maximum Power **Operating Area** Dissipation

Typical Characteristics (Q2 N-Channel) T<sub>J</sub> = 25°C unless otherwise noted


100

1000

10<sup>0</sup>

10<sup>1</sup>



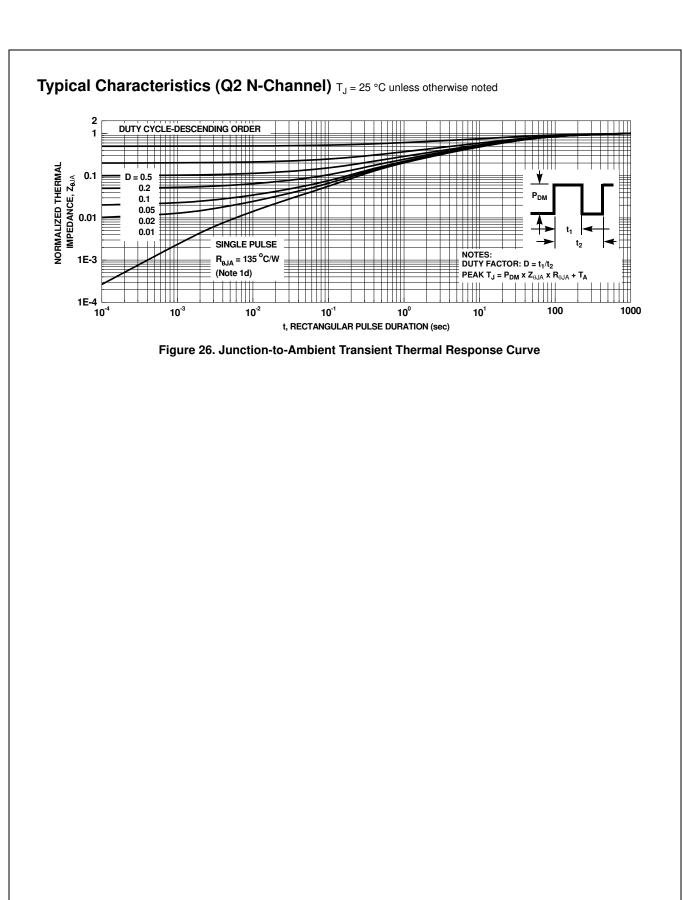

# Typical Characteristics (continued)

# SyncFET<sup>™</sup> Schottky body diode Characteristics

Fairchild's SyncFET<sup>TM</sup> process embeds a Schottky diode in parallel with PowerTrench MOSFET. This diode exhibits similar characteristics to a discrete external Schottky diode in parallel with a MOSFET. Figure 27 shows the reverse recovery characteristic of the FDPC8012S.

30 25 di/dt = 300 A/µs 20 CURRENT (A) 15 10 5 0 -5 80 240 320 0 160 400 TIME (ns)

Figure 27. FDPC8012S SyncFET<sup>TM</sup> body diode reverse recovery characteristic

Schottky barrier diodes exhibit significant leakage at high temperature and high reverse voltage. This will increase the power in the device.





Figure 28. SyncFET<sup>TM</sup> body diode reverse leakage versus drain-source voltage

www.fairchildsemi.com


# **Application Information**

## Typical Application Diagram (Synchronous Rectifier Buck Converter)



#### Figure 1. Power Clip in Buck Converter Topology

As shown in Figure 1, in the Power Clip package Q1 is the High Side MOSFET (Control MOSFET) and Q2 is the Low Side MOSFET (Synchronous MOSFET). Figure 2 below shows the package pin out. The blue overlay on the drawing indicates a typical PCB land pattern for the part.



#### Figure 2.Top View of Power Clip

Table 1 Pin Information shows the name and description of each pin.

PIN	Description
Name	Description
HSG	Gate signal input of Q1 Gate
SW	Switch or Phase node, Source of Q1 and Drain of Q2
GND,GND(LSS) PAD	Ground, Source of Q2
LSG	Gate signal input of Q2 Gate
V+, V+(HSD) PAD	Input voltage of SR Buck converter, Drain of Q1
	Name   HSG   SW   GND,GND(LSS) PAD   LSG

Table 1. Pin Information

# **Recommended PCB Layout Guidelines**

As a PCB designer, it is necessary to address critical issues in layout to minimize losses and optimize the performance of the power train. Power Clip is a high power density solution and all high current flow paths, such as V+(HSD), SW and GND(LSS) should be short and wide for minimal resistance and inductance. V+(HSD) and GND(LSS) are the primary heat flow paths for the Power Clip. A recommended layout procedure is discussed below to maximize the electrical and thermal performance of the part.

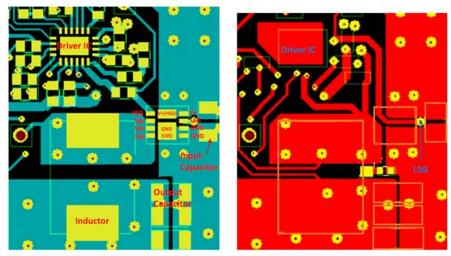


Figure 3.Top/Component (green) View and Bottom (red) PCB View

#### Following is a guideline, not a requirement which the PCB designer should consider.


Figure 3 shows an example of a well designed layout. The discussion that follows summarizes the key features of this layout.

- "The input ceramic bypass capacitor between VIN and GND should be placed as close as possible to the pins V+ / V+(HSD) PAD and GND / GND(LSS) PAD to help reduce parasitic inductance and high frequency ringing. Several capacitors may be placed in parallel, and capacitors may be placed on both the top and bottom side of the board. The capacitor located immediately adjacent to the Power Clip will be the most effective at reducing HF parasitic. Caps located farther away, or on the opposite side of the board will also assist, but will be less effective due to increased trace inductance.
- "The Power Clip package design, with very short distance between pins V+ and GND, allows for a short connect distance to the input cap. This is a factor that enables the Power Clip switch loop to have very low parasitic inductance.
- "Use large copper areas on the component side to connect the V+ pin and V+ (HSD) pad, and the GND and GND(LSS) PAD.
- "The SW to inductor copper trace is a high current path. It will also be a high noise region due to switching voltage transients. The trace should be short and wide to enable a low resistance path and to minimize the size of the noise region. Care should be taken to minimize coupling of this trace to adjacent traces. The layout in Figure 3 shows a good example of this short, wide path.
- "The Power Trench<sup>®</sup> Technology MOSFETs used in the Power Clip are effective at minimizing SW node ringing. They incorporate a proprietary design<sup>1</sup> that minimizes the peak overshoot ring voltage on the switch node (SW). They allow the part to operate well within the breakdown voltage limits. For most layouts, this eliminates the need to add an external snubber circuit. If the designer chooses to use an RC snubber, it should be placed close to the part between the SW pins and GND / GND (LSS) PAD to dampen the high frequency ringing.
- "The Driver IC should be placed relatively closed to HSG pin and LSG pin to minimize G drive trace inductance. Excessive G trace length may slow the switching speed of the HS drive. And it may lead to excessive ringing on the LS G. If the designer must place the driver a significant distance away from the Power Clip, it would be a good practice to include a 0 Ohm resistor in the LS G path as a place holder. In the final design, if the LS G exhibits excessive LF ringing, efficiency can often be improved by changing this resistor to a few Ohms to dampen the LS G LF ringing.
- "The Power Clip has very good Junction-PCB heat transfer from all power pins. It has much better heat transfer Junction-GND (LSS) than traditional dual FET packages. In most cases, board ground will be the most effective heat transfer path on the PCB. Use a large copper area between GND / GND(LSS)PAD pins and board ground. To ensure the best thermal and electrical connection to ground, we recommend using multiple vias to interconnect ground plane layers as shown in Figure 3.

<sup>1.</sup>Patent Pending

- "Use multiple vias in parallel on each copper region to interconnect top, inner and bottom layers. This will reduce resistance and inductance of the vias and will improve thermal conductivity. Vias should be relatively large, around 8 mils to 10 mils.
- "Avoid using narrow thermal relief traces on the V+ / V+(HSD) PAD and GND / GND(LSS)PAD pins. These will increase HF switch loop inductance. And these will increase ringing of the HF power loop and the SW node.

FDPC8012S PowerTrench<sup>®</sup> Power Clip

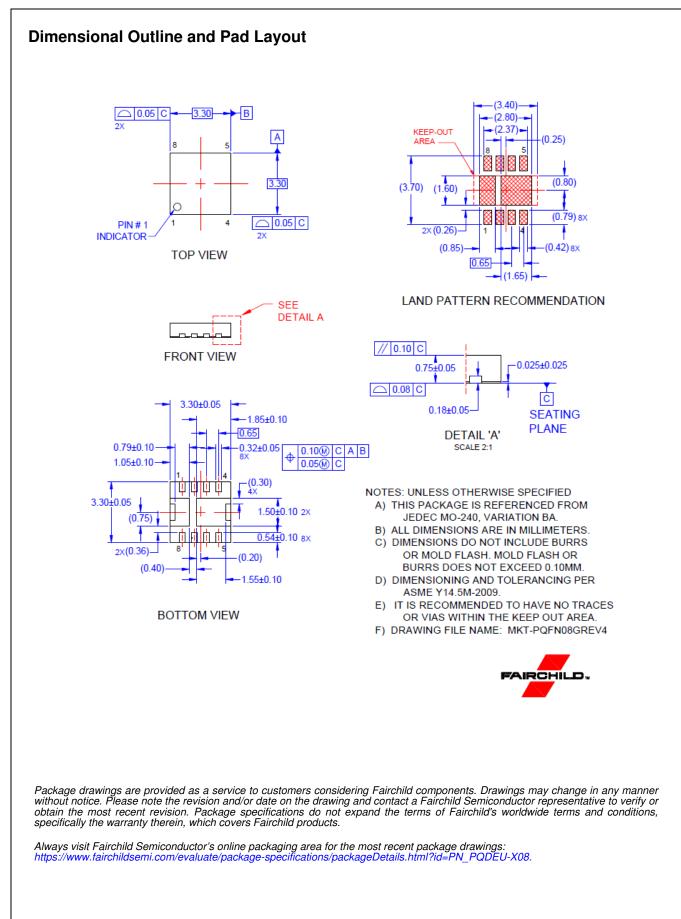



#### TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

AccuPower™ Awinda <sup>®</sup>	F-PFS™ FRFET <sup>®</sup>	OB BowerTrench <sup>®</sup>	GENERAL ®*
AccuPower <sup>TM</sup> Awinda <sup>®</sup> AX-CAP <sup>®</sup> * BitSiCTM Build it Now <sup>TM</sup> CorePLUSTM CorePOWER <sup>TM</sup> CROSSVOLT <sup>TM</sup> CTL <sup>TM</sup> Current Transfer Logic <sup>TM</sup> DEUXPEED <sup>®</sup> Dual Cool <sup>TM</sup> EcoSPARK <sup>®</sup> EfficentMax <sup>TM</sup> ESBC <sup>TM</sup> Fairchild <sup>®</sup> Fairchild <sup>®</sup> Fairchild <sup>®</sup> Fairchild <sup>®</sup> Fairchild Semiconductor <sup>®</sup> FACT Quiet Series <sup>TM</sup> FACT <sup>®</sup> FAST <sup>®</sup> FastVCore <sup>TM</sup> FETBench <sup>TM</sup> FPST <sup>M</sup>		PowerTrench <sup>®</sup> PowerXS <sup>™</sup> Programmable Active Droop <sup>™</sup> QFET <sup>®</sup> QS <sup>™</sup> Quiet Series <sup>™</sup> RapidConfigure <sup>™</sup>	
1 F O <sup></sup>		-,	仙童™

\*Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

#### DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. TO OBTAIN THE LATEST, MOST UP-TO-DATE DATASHEET AND PRODUCT INFORMATION, VISIT OUR WEBSITE AT <u>HTTP://WWW.FAIRCHILDSEMI.COM</u>. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used here in:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
- A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

#### ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.Fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufactures of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed application, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handing and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address and warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts buying direct or from authorized distributors. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

#### PRODUCT STATUS DEFINITIONS

#### **Definition of Terms**

Datasheet Identification	Product Status	Definition
Advance Information	Formative / In Design	Datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design.
No Identification Needed	Full Production	Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design.
Obsolete	Not In Production	Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only.

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent-Marking.pdf</u>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor has against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death ass

#### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor 19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada Email: orderlit@onsemi.com N. American Technical Support: 800–282–9855 Toll Free USA/Canada Europe, Middle East and Africa Technical Support: Phone: 421 33 790 2910

Japan Customer Focus Center Phone: 81-3-5817-1050 ON Semiconductor Website: www.onsemi.com

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

© Semiconductor Components Industries, LLC