



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



FAN5336 Evaluation Board User Manual

- 2.7 to 5.5V Input Range
- 9V to 33V Output Range
- 1.5A Peak Switch Current
- Low Noise
- Low Shutdown Current: <1uA
- 1.5 MHz Fixed-Frequency PWM Operation
- Over Voltage Protection, Shutdown Mode and Soft Start
- Excellent Regulation: 0.2%
- Small 6-lead 3x3mm MLP Package

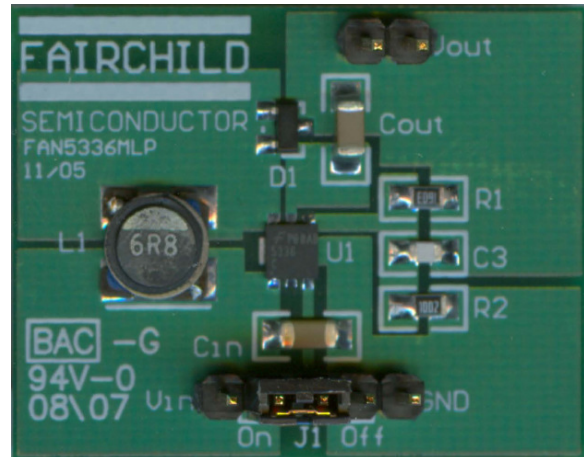


Figure 1: FAN5336MPX

Description:

The **FAN5336 Evaluation Board** is a compact circuit including the FAN5336 MPX in an MLP package and two small capacitors which can provide regulated output voltage to the load. The inductor-Schottky diode combination and two typically valued resistors are also included to form a resistor divider to the feedback pin. A feed forward capacitor is provided for stability as well. The FAN5336 demo board, a completely assembled and tested surface mount board, provides easy probe access points to all inputs and outputs so that electrical characteristics and waveforms can be easily measured.

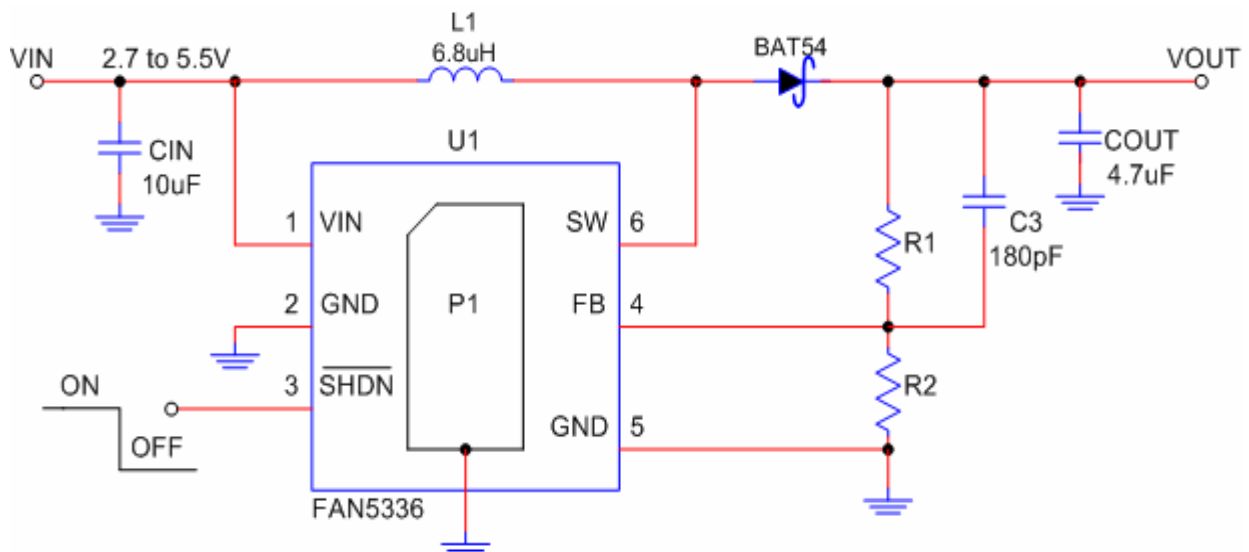


Figure 2: Schematic Diagram

Where To Begin:

1: Connect V_{IN} (2.7 to 5.5V) and Gnd (0V).

2: To verify supply current in “ON” and “OFF” modes, observe that in shutdown mode, supply current will drop to the current pulled by the resistor divider.

$$I = V_{IN} / (R1 + R2).$$

(Note: Use Jumper J1 to connect V_{IN} directly to "ON" or Gnd to "OFF")

3: Observe that $V_{OUT} = V_{REF} \{1 + (R1/R2)\}$ ($V_{REF} = 1.23V$ typical).

4: Verify that V_{OUT} is independent of V_{IN} when it decreases from 5.5V to 2.7V if the load current does not exceed its maximum value, a function of V_{IN} .

(Note: Although the load current is indirectly limited by the maximum inductor current, V_{OUT} is not allowed to be shorted to ground. Failure results in damaging the Schottky diode and/or the IC)

(Note: The Schottky diode D1, rectifies the voltage pulses generated by the inductor)

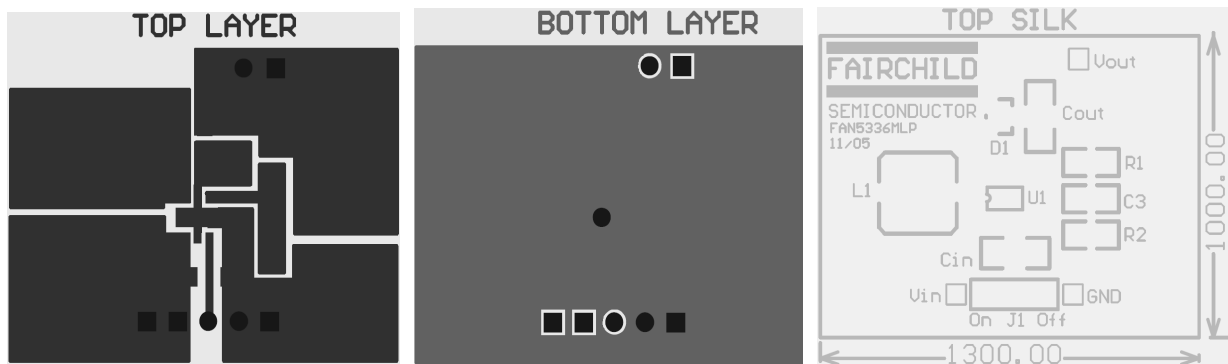


Figure 3: PCB Layout

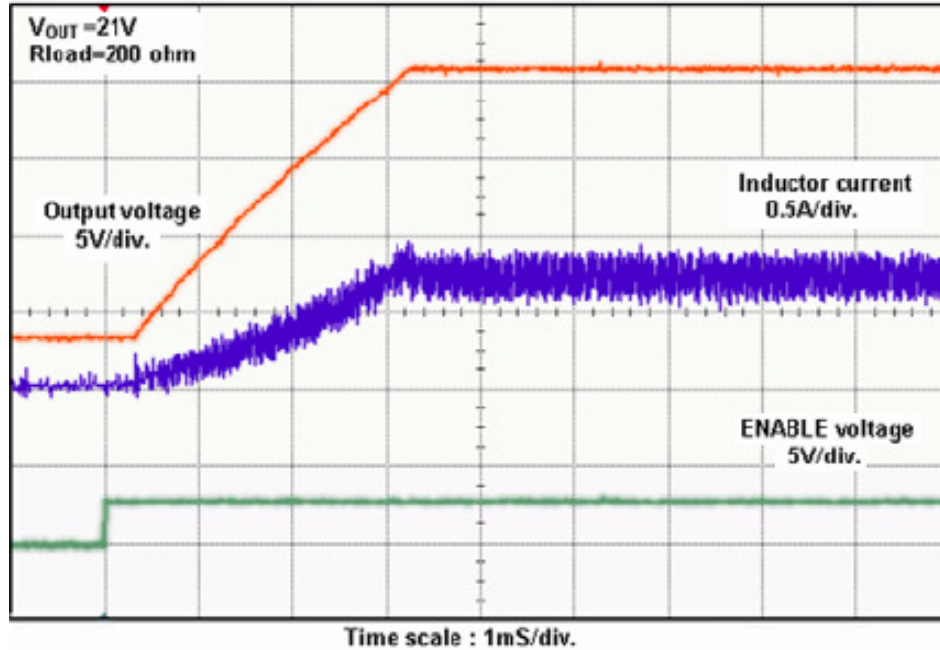


Figure 4: Start-Up Waveform

Table 1: FAN5336 List of Materials

Description	Qty	Ref.	Vendor	Part Number
Hardware Connector Header .1 SINGLE STR 36POS	7	GND,VIN, VOUT,ON/OFF	Digi-Key	S1011-36-ND
Hardware, SHUNT, PHBR 15 AU	1	ON/OFF	Digi-Key	A26227-ND
Inductor 6.8uH, 1.5A, 35mohm, low profile, 20%, SMD	1	L1	TDK	SLF6028T-6R8M1R5
IC System Regulator, MLP-6, FSID: FAN5336	1	U1	Fairchild	FAN5332MPX
Capacitor 180pF, 10%, 50V, COG, 0805	1	C3	Any	
Resistor 10 Kohm, 1%, 0805	1	R2	Any	
Resistor 160 Kohm, 1%, 0805	1	R1	Any	
Capacitor 10 uF/6.3V, 10%, 1206	1	CIN	Panasonic	ECJ-3YB0J106K
Capacitor 4.7 uF/25V, 10%, 1206	1	COUT	Panasonic	
Diode Schottky, 30V, 0.2A , SOT-23, FSID: BAT54	1	D1	Fairchild	BAT54

Table 2: Ordering Information

Product Number	Package Type	Order Code
FAN5336	6-Lead MLP	FAN5336MPX