imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





SANYO Semiconductors DATA SHEET



N-Channel Silicon MOSFET General-Purpose Switching Device Applications

Features

- 4V drive.
- Composite type, facilitating high-density mounting.

Specifications

Absolute Maximum Ratings at Ta=25°C

Parameter	Symbol	Conditions	Ratings	Unit
Drain-to-Source Voltage	VDSS		30	V
Gate-to-Source Voltage	VGSS		±20	V
Drain Current (DC)	ID		6	А
Drain Current (PW≤10s)	ID	Duty cycle≤1%	6.5	А
Drain Current (PW≤10µs)	IDP	Duty cycle≤1%	24	А
Allowable Power Dissipation	PD	When mounted on ceramic substrate (2000mm ² x0.8mm) 1unit, PW≤10s	1.8	W
Total Dissipation	PT	When mounted on ceramic substrate (2000mm ² ×0.8mm), PW≤10s	2.2	W
Channel Temperature	Tch		150	°C
Storage Temperature	Tstg		-55 to +150	°C

Electrical Characteristics at Ta=25°C

Parameter	Symbol	Conditions	Ratings			1.1
			min	typ	max	Unit
Drain-to-Source Breakdown Voltage	V(BR)DSS	ID=1mA, VGS=0V	30			V
Zero-Gate Voltage Drain Current	IDSS	V _{DS} =30V, V _{GS} =0V			1	μA
Gate-to-Source Leakage Current	IGSS	V _{GS} =±16V, V _{DS} =0V			±10	μA
Cutoff Voltage	VGS(off)	V _{DS} =10V, I _D =1mA	1.2		2.6	V
Forward Transfer Admittance	yfs	V _{DS} =10V, I _D =6A	1.8	3		S
Static Drain-to-Source On-State Resistance	R _{DS} (on)1	ID=6A, VGS=10V		28	37	mΩ
	R _{DS} (on)2	ID=3A, VGS=4.5V		43	61	mΩ
	R _{DS} (on)3	ID=3A, VGS=4V		52	73	mΩ

Marking : W274

Continued on next page.

- Any and all SANYO Semiconductor Co.,Ltd. products described or contained herein are, with regard to "standard application", intended for the use as general electronics equipment (home appliances, AV equipment, communication device, office equipment, industrial equipment etc.). The products mentioned herein shall not be intended for use for any "special application" (medical equipment whose purpose is to sustain life, aerospace instrument, nuclear control device, burning appliances, transportation machine, traffic signal system, safety equipment etc.) that shall require extremely high level of reliability and can directly threaten human lives in case of failure or malfunction of the product or may cause harm to human bodies, nor shall they grant any guarantee thereof. If you should intend to use our products for applications outside the standard applications, please consult with us prior to the intended use. If there is no consultation or inquiry before the intended use, our customer shall be solely responsible for the use.
- Specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.


SANYO Semiconductor Co., Ltd. www.semiconductor-sanyo.com/network

Continued from preceding page.


Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	Unit
Input Capacitance	Ciss	V _{DS} =10V, f=1MHz		490		pF
Output Capacitance	Coss	V _{DS} =10V, f=1MHz		85		pF
Reverse Transfer Capacitance	Crss	V _{DS} =10V, f=1MHz		45		pF
Turn-ON Delay Time	t _d (on)	See specified Test Circuit.		8		ns
Rise Time	tr	See specified Test Circuit.		45		ns
Turn-OFF Delay Time	t _d (off)	See specified Test Circuit.		31		ns
Fall Time	tf	See specified Test Circuit.		28		ns
Total Gate Charge	Qg	V _{DS} =15V, V _{GS} =10V, I _D =6A		9.1		nC
Gate-to-Source Charge	Qgs	V _{DS} =15V, V _{GS} =10V, I _D =6A		1.7		nC
Gate-to-Drain "Miller" Charge	Qgd	V _{DS} =15V, V _{GS} =10V, I _D =6A		1.7		nC
Diode Forward Voltage	VSD	IS=6A, VGS=0V		0.84	1.2	V

Package Dimensions


unit : mm (typ) 7005A-003

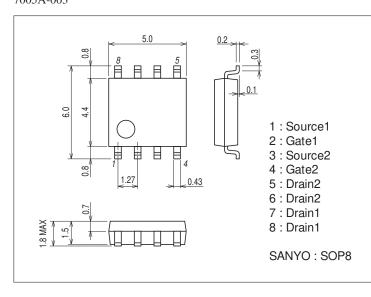



Electrical Connection




Switching Time Test Circuit



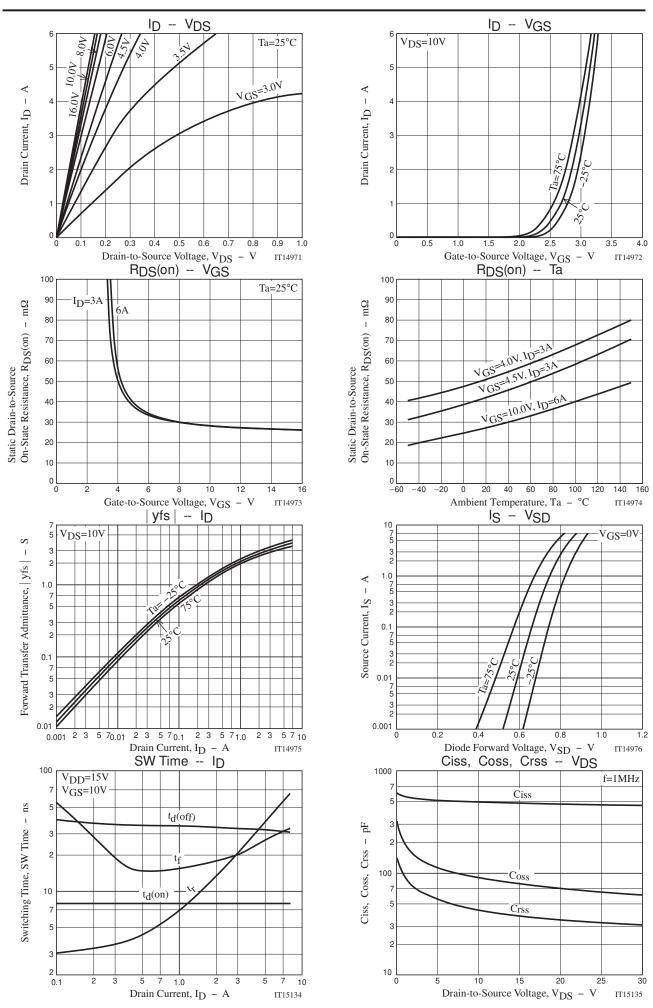

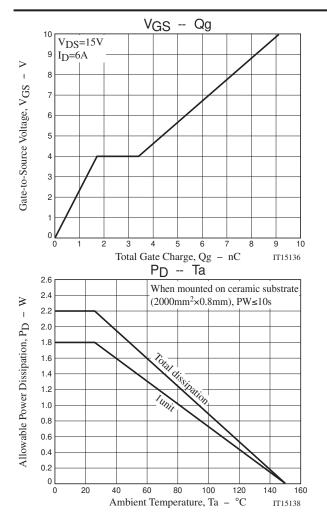



Note on usage : Since the FW274 is a MOSFET product, please avoid using this device in the vicinity of highly charged objects.

- SANYO Semiconductor Co.,Ltd. assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all SANYO Semiconductor Co.,Ltd. products described or contained herein.
- SANYO Semiconductor Co.,Ltd. strives to supply high-quality high-reliability products, however, any and all semiconductor products fail or malfunction with some probability. It is possible that these probabilistic failures or malfunction could give rise to accidents or events that could endanger human lives, trouble that could give rise to smoke or fire, or accidents that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- In the event that any or all SANYO Semiconductor Co.,Ltd. products described or contained herein are controlled under any of applicable local export control laws and regulations, such products may require the export license from the authorities concerned in accordance with the above law.
- No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written consent of SANYO Semiconductor Co.,Ltd.
- Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the SANYO Semiconductor Co.,Ltd. product that you intend to use.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production.
- Upon using the technical information or products described herein, neither warranty nor license shall be granted with regard to intellectual property rights or any other rights of SANYO Semiconductor Co.,Ltd. or any third party. SANYO Semiconductor Co.,Ltd. shall not be liable for any claim or suits with regard to a third party's intellectual property rights which has resulted from the use of the technical information and products mentioned above.

This catalog provides information as of November, 2009. Specifications and information herein are subject to change without notice.