



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





## **GSK-948 DIGITAL CLOCK**

This circuit uses IC FUJISU MB95F264 which is a new IC generation, small size, -and provides memory up to 20 kilobytes. The circuit is suitable to utilize as a current time showing or apply with other application by re-programming an IC.

### Technical Specifications

- Power supply: 12VDC. 90mA. max.
- Display in 24-hour format.
- There are two display formats;  
Hour:Minute or Minute:Second operation.
- There is a connecting point with FUJISU programmer MB2146-08-E.
- PCB dimensions: 2.35 x 2.94 in.

### Circuit Assembling

External connecting and fitting are shown in Figure 2. It is recommended to start the assembly with the lowest component for easy assembly.

First the diodes, then resistors, electrolyte capacitors, transistors and sequence from the lowest to the highest.

Be cautious during assembly, before fitting any devices be assure that the PCB poles and components are matched. Otherwise, wrong fitting will cause damage to the PCB and devices. Soldering iron should not exceed 40W, and soldering lead with a tin and lead ratio of 60/40 together with a joint solution inside.

Recheck the assembled circuit for your own assurance. Better to use a lead sucker or a lead -wire absorber in case of misplacing component to protect PCB from damaged. For MB95 board, assembling and loading program were done completely by factory.

### Testing

When the assembly is complete supply 12VDC to the circuit. The display will show 0:00 (when the colon point blinks that means the circuit is working).

### Setting the Current Time

1. Connect the battery backup 4.5V to BACKUP point.
2. Supply 12VDC to the circuit. The display will show 0:00 (colon point will blink).
3. Press switch S1 or S2 (colon point will light )
4. Press switch S1 to set hour digit and press switch S2 to set minute digit.
5. When the time setting is completed, press switch S3, the display will show minute:second format, then press switch S1 or S2, the display will show hour:minute format, and colon point will blink.

### Note:

During the setting of the time if you don't press any switch within 5 seconds, the circuit will exit from the current time setting automatically and work normally.

While setting an hour, a minute or a second digit if you want to adjust the figure faster, press and hold the switch.

### Reset the Current Time (0:00)

Press and hold switch S3, follow with switch S2. The display will show 0:00.


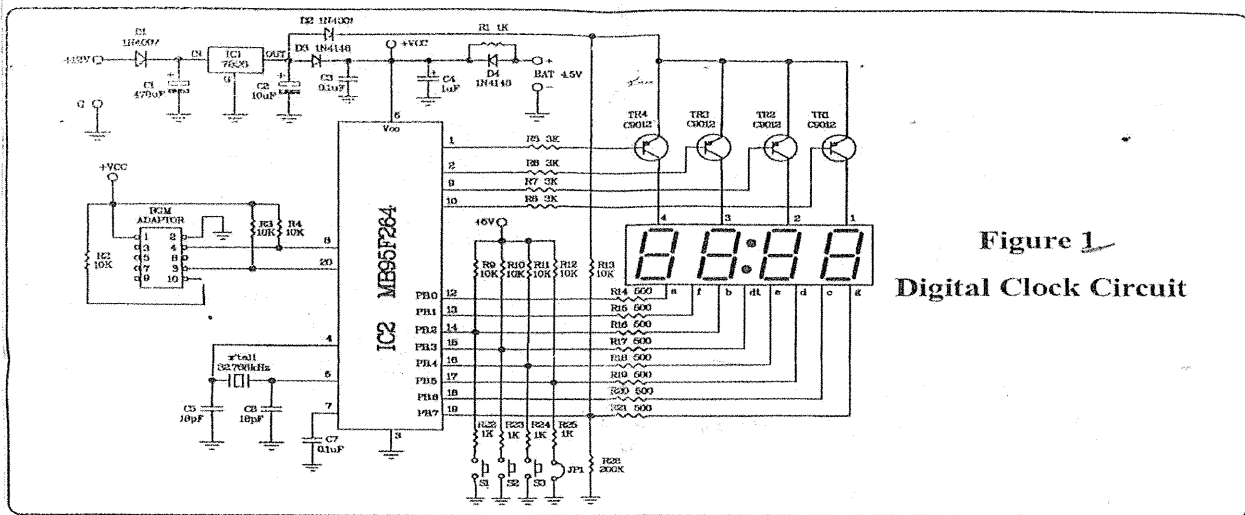


Figure 1  
Digital Clock Circuit

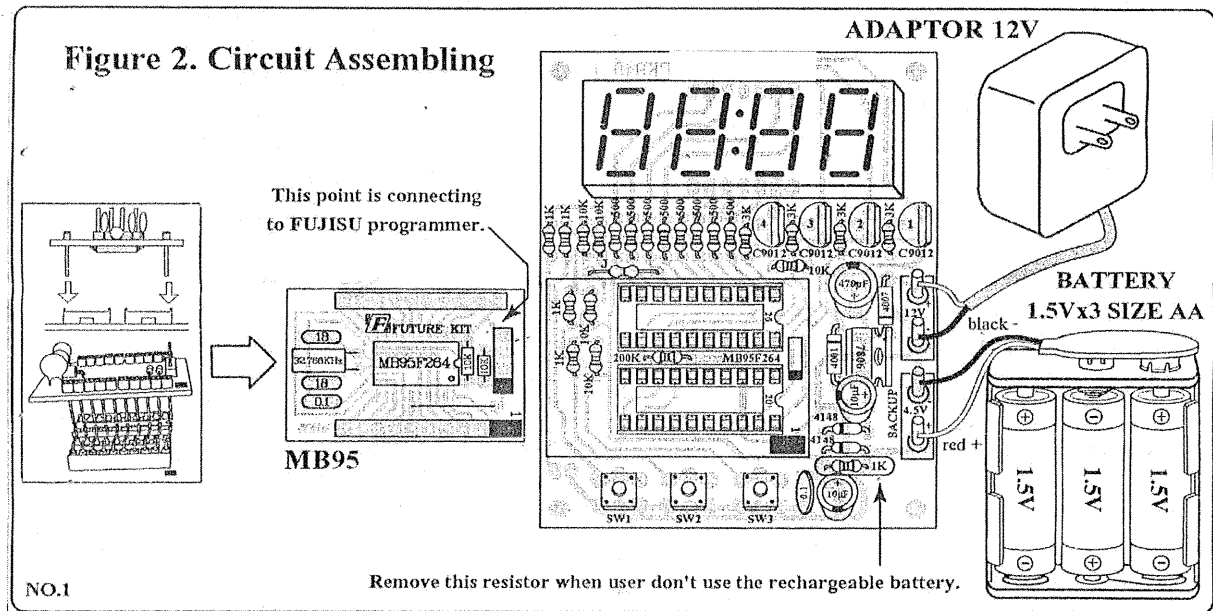

NO.1

Remove this resistor when user don't use the rechargeable battery.

**RESISTORS**

|               |               |                           |
|---------------|---------------|---------------------------|
| R1, R22-R25   | 1k $\Omega$   | - brown-black-red-gold    |
| R2-R4, R9-R13 | 10k $\Omega$  | - brown-black-orange-gold |
| R5-R8         | 3k $\Omega$   | - orange-black-red-gold   |
| R14-R21       | 500 $\Omega$  | - green-black-brown-gold  |
| R26           | 200k $\Omega$ | - red-black-yellow-gold   |

**ELECTROLYTIC CAPACITORS**

|    |               |
|----|---------------|
| C1 | = 470 $\mu$ F |
| C2 | = 10 $\mu$ F  |
| C4 | = 1 $\mu$ F   |

**CERAMIC CAPACITOR**

|        |                      |        |        |
|--------|----------------------|--------|--------|
| C3, C7 | = 0.1 $\mu$ F or 104 | C5, C6 | = 18pF |
|--------|----------------------|--------|--------|

**TRANSISTORS** TR1-TR4 = C9012

**DIODES**

|        |                    |
|--------|--------------------|
| D1, D2 | = 1N4001 or 1N4007 |
| D3, D4 | = 1N4148           |

**IC**

|     |        |     |            |
|-----|--------|-----|------------|
| IC1 | = 7806 | IC2 | = MB95F264 |
|-----|--------|-----|------------|

