

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China












# WIDEBAND MMIC VCO w/ BUFFER AMPLIFIER, 4 - 8 GHz

### **Typical Applications**

Low Noise wideband MMIC VCO is ideal for:

- Industrial/Medical Equipment
- Test & Measurement Equipment
- Military Radar, EW & ECM

### **Functional Diagram**



#### **Features**

Wide Tuning Bandwidth

Pout: +5 dBm

Low SSB Phase Noise: -100 dBc/Hz @100 kHz

No External Resonator Needed

Single Positive Supply: +5V @ 55 mA RoHS Compliant 4 x 4 mm SMT Package

### **General Description**

The HMC586LC4B is a wideband GaAs InGaP Voltage Controlled Oscillator which incorporates the resonator, negative resistance device, and varactor diode. Output power and phase noise performance are excellent over temperature due to the oscillator's monolithic construction. The Vtune port accepts an analog tuning voltage from 0 to +18V. The HMC586LC4B VCO operates from a single +5V supply, consumes only 55 mA of current, and is housed in a RoHS compliant SMT package. This wideband VCO uniquely combines the attributes of ultra small size, low phase noise, low power consumption, and wide tuning range.

# Electrical Specifications, $T_A = +25^{\circ}$ C, Vcc = +5V

Parameter	Min.	Тур.	Max.	Units
Frequency Range	4 - 8		GHz	
Power Output	2	5		dBm
SSB Phase Noise @ 100 kHz Offset		-100		dBc/Hz
SSB Phase Noise @ 10 kHz Offset		-75		dBc/Hz
Tune Voltage (Vtune)	0		18	V
Supply Current (Icc) (Vcc = +5.0V)	40		75	mA
Tune Port Leakage Current (Vtune = +15V)			10	μΑ
Output Return Loss		7		dB
2nd Harmonic		-14		dBc
Pulling (into a 2.0:1 VSWR)		4		MHz pp
Pushing @ Vtune= +5V		40		MHz/V
Frequency Drift Rate		0.8		MHz/°C

# **HMC586\* PRODUCT PAGE QUICK LINKS**

Last Content Update: 02/23/2017

# COMPARABLE PARTS -

View a parametric search of comparable parts.

## **EVALUATION KITS**

• HMC586LC4B Evaluation Board.

## **DOCUMENTATION**

#### **Data Sheet**

• HMC586 Data Sheet

# REFERENCE MATERIALS $\Box$

#### **Quality Documentation**

- Package/Assembly Qualification Test Report: LC4, LC4B (QTR: 2014-00380 REV: 01)
- Semiconductor Qualification Test Report: GaAs HBT-A (QTR: 2013-00228)

#### **Technical Articles**

• SMT Wideband MMIC VCOs Tune from 4 to 12.5 GHz

# DESIGN RESOURCES 🖵

- HMC586 Material Declaration
- PCN-PDN Information
- · Quality And Reliability
- Symbols and Footprints

### **DISCUSSIONS** •

View all HMC586 EngineerZone Discussions.

# SAMPLE AND BUY 🖵

Visit the product page to see pricing options.

# **TECHNICAL SUPPORT**

Submit a technical question or find your regional support number.

### DOCUMENT FEEDBACK 🖳


Submit feedback for this data sheet.






# WIDEBAND MMIC VCO w/ BUFFER AMPLIFIER, 4 - 8 GHz


### Frequency vs. Tuning Voltage, Vcc = +5V




### Frequency vs. Tuning Voltage, T = +25 C




### Sensitivity vs. Tuning Voltage, Vcc= +5V




# Output Power vs. Tuning Voltage, Vcc= +5V



### SSB Phase Noise vs. Tuning Voltage



### Typical SSB Phase Noise @ Vtune= +5V







# WIDEBAND MMIC VCO w/ BUFFER AMPLIFIER, 4 - 8 GHz


### **Absolute Maximum Ratings**

Vcc	+5.5 Vdc	
Vtune	0 to +22V	
Junction Temperature	135 °C	
Continuous Pdiss (T = 85°C) (derate 12.5 mW/°C above 85°C)	625 mW	
Thermal Resistance (junction to ground paddle)	80 °C/W	
Storage Temperature	-65 to +150 °C	
Operating Temperature	-40 to +85 °C	



# **Outline Drawing**

### **BOTTOM VIEW**

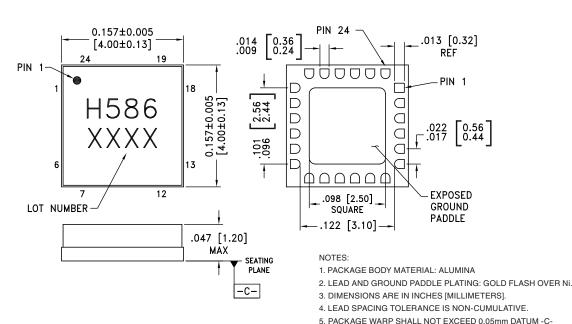

# Package Information

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking [2]
HMC586LC4B	Alumina, White	Gold over Nickel	MSL3 [1]	H586 XXXX

<sup>[1]</sup> Max peak reflow temperature of 260  $^{\circ}\text{C}$ 

6. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED

TO PCB BE GROUND

<sup>[2] 4-</sup>Digit lot number XXXX





# WIDEBAND MMIC VCO w/ BUFFER AMPLIFIER, 4 - 8 GHz

## **Pin Descriptions**


Pin Number	Function	Description	Interface Schematic
1 - 3, 5 - 11, 13, 17 - 24	N/C	No Connection. These pins may be connected to RF/DC ground. Performance will not be affected.	
4	Vtune	Control Voltage and Modulation Input. Modulation bandwidth dependent on drive source impedance. See "Determining the FM Bandwidth of a Wideband Varactor Tuned VCO" application note.	Vtune ○
12	Vcc	Supply Voltage Vcc= +5V	Vcc O20pF
14, 16	GND	Package bottom has an exposed metal paddle that must also be RF & DC grounded.	GND =
15	RFOUT	RF output (AC coupled)	RFOUT





# WIDEBAND MMIC VCO w/ BUFFER AMPLIFIER, 4 - 8 GHz

### **Evaluation PCB**

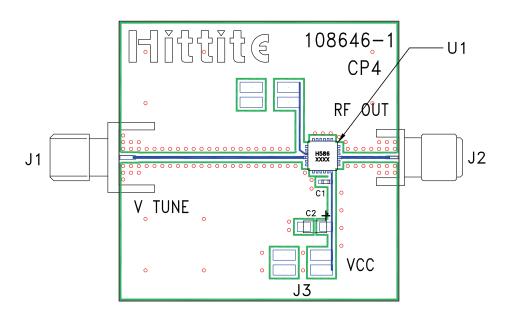

### List of Materials for Evaluation PCB 108648 [1]

Item	Description	
J1	PCB Mount SMA RF Connector, Johnson	
J2	PCB Mount SMA Connector, SRI	
J3	DC Header	
C1	1000 pF Capacitor, 0402 Pkg.	
C2	4.7 μF Capacitor, Tantalum	
U1	HMC586LC4B VCO	
PCB [2]	108646 Eval Board	

<sup>[1]</sup> Reference this number when ordering complete evaluation PCB

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed ground paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.

<sup>[2]</sup> Circuit Board Material: Rogers 4350





**ANALOG**DEVICES

