



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



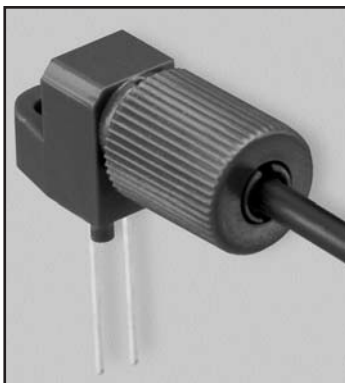

DESCRIPTION

The IF-D92 is a high-sensitivity NPN phototransistor detector housed in a “connector-less” style plastic fiber optic package. Optical response of the IF-D92 extends from 400 to 1100 nm, making it compatible with a wide range of visible and near-infrared LEDs and laser diode sources. This includes 650 nm visible red LEDs used for optimum transmission in PMMA plastic optic fiber. The detector package features an internal micro-lens and a precision-molded PBT housing to ensure efficient optical coupling with standard 1000 μm core plastic fiber cable.

APPLICATION HIGHLIGHTS

The IF-D92 is suitable for digital data links at rates up to 25 kbps. Analog bandwidths greater than 15 kHz are possible making the IF-D92 usable for high frequency audio transmission. Phototransistor operation provides high internal gain – reducing the amount of post-amplification required in many circuits. The integrated design of the IF-D92 makes it a simple, cost-effective solution in a variety of analog and digital applications.

APPLICATIONS

- Low-Speed Digital Data Links
- Motor Controller Triggering
- Audio Links
- Medical Instruments
- Automotive Electronics
- Robotics Communications
- EMC/EMI Signal Isolation
- Electronic Games
- Process Control

FEATURES

- ◆ High Optical Sensitivity
- ◆ Mates with Standard 1000 um Core Jacketed Plastic Fiber Optic Cable
- ◆ No Optical Design Required
- ◆ Inexpensive but Rugged Plastic Connector Housing
- ◆ Internal Micro-Lens for Efficient Optical Coupling
- ◆ Connector-Less Fiber Termination
- ◆ Light-Tight Housing provides Interference Free Transmission
- ◆ RoHS Compliant

MAXIMUM RATINGS

 $(T_A = 25^\circ\text{C})$

Operating and Storage Temperature Range

(T_{OP}, T_{STG}).....-40° to 85°C

Junction Temperature (T_J)85°C

Soldering Temperature
(2 mm from case bottom)

(T_S) t ≤ 5 s.....240°C

Collector Emitter Voltage (V_{CEQ})....30 V

Emitter Collector Voltage (V_{ECQ})5 V

Collector Current (I_C).....50 mA

Collector Peak Current
(I_{CM}) $t = 1\text{ ms}$ 100 mA

Power Dissipation

(P_{TOT}) T_A=25°C100 mW

De-rate Above 25°C1.33 mW/°C

CHARACTERISTICS (T_A=25°C)

Parameter	Symbol	Min	Typ	Max	Unit
Wavelength for Maximum Photosensitivity	λ_{PEAK}	–	870	–	nm
Spectral Bandwidth ($S=10\%$ of S_{MAX})	$\Delta\lambda$	400	–	1100	nm
Switching Times (10% to 90% and 90% to 10%) ($R_L=1\text{ k}\Omega$, $I_C=1.0\text{ mA}$, $V_{CE}=5\text{ V}$, $\lambda=950\text{ nm}$)	t_r, t_f	–	20	–	μs
Responsivity min. @ 880 nm @ 632 nm	R	– –	100 50	– –	$\mu\text{A}/\mu\text{W}$ $\mu\text{A}/\mu\text{W}$
Collector Dark Current ($V_{CE}=15\text{ volts}$)	I_{CEO}	–	–	100	nA
Breakdown Voltage ($I_C=100\mu\text{A}$)	BV_{CEO}	30	–	–	V
Breakdown Voltage ($I_C=-100\mu\text{A}$)	BV_{ECO}	5	–	–	V
Saturation Voltage ($I_C=250\mu\text{A}$, $H=100\mu\text{W}$)	$V_{CE\text{ sat}}$	–	0.15	–	V

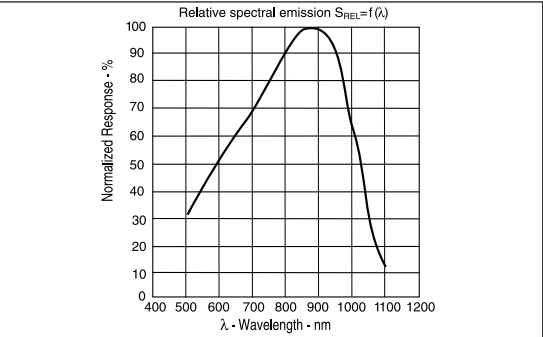


FIGURE 1. Typical detector response versus wavelength.

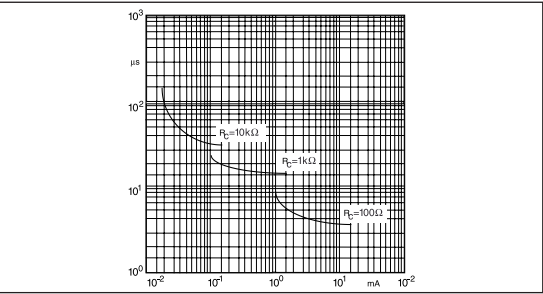


FIGURE 2. Rise and fall times of phototransistor.

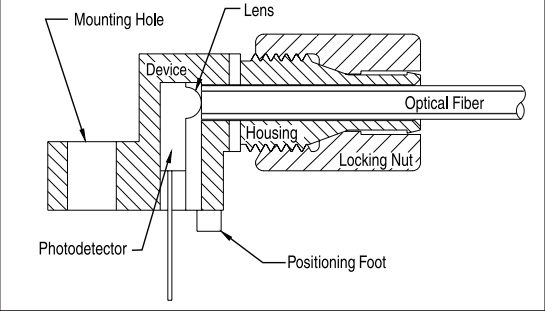


FIGURE 3. Cross-section of fiber optic device.

FIBER TERMINATION INSTRUCTIONS

1. Cut off the ends of the optical fiber with a single-edge razor blade or sharp knife. Try to obtain a precise 90-degree angle (square).
2. Insert the fiber through the locking nut and into the connector until the core tip seats against the internal micro-lens.
3. Screw the connector locking nut down to a snug fit, locking the fiber in place.

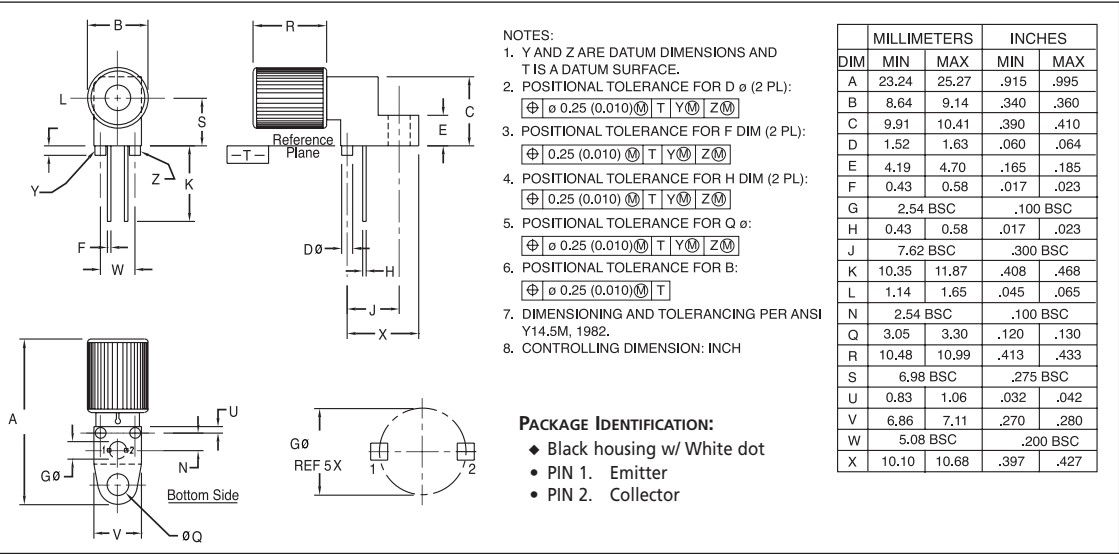


FIGURE 4. Case outline.