



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



TouchClamp click


From MikroElektronika Documentation

TouchClamp click is a mikroBUS™ add-on board with NXP's MPR121 proximity capacitive touch sensor controller. It has seven plated holes for clamps which can be used to connect any – literally any – conductive object in order to use it as an input button to send an interrupt to the target board MCU. It's great for creating installations where users interact with the environment in unexpected ways. TouchClamp click communicates with the target MCU through the mikroBUS™ INT pin and I2C interface (SCL, SDA). The board has an onboard ADDR. SEL. jumper for choosing I2C addresses. Designed to use a 3.3V power supply only.

Features and usage notes

The easiest way to experiment with TouchClamp click is to use wires with alligator clips. Let your imagination roam free when choosing conductive objects. Cans, fruit, jar lids, and much more. The MPR121 chip has several features that simplify development and integration.

First, it applies 3 levels of digital filtering

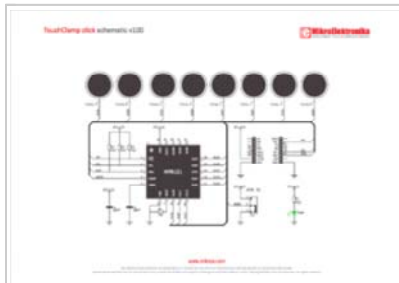

Schematic also available in PDF (http://cdn-docs.mikroe.com/images/3/31/TouchClamp_click_sc)

to the raw ADC data to remove high and low frequency noise, ensuring that the interrupts are properly registered in a broad range of applications.

Additionally, MPR121 has an auto-calibration function. According to the vendor's data sheet, it "continually learns the background baseline capacitance of each individual electrode, so the system only has to program the amount of small change from these baselines that represents a touch or release."

Finally, the electrodes are auto-configurable. Given a target charge level, the chip can automatically run to get an optimized setting of charge current and charge time for each electrode without knowing the specific capacitance value on the electrode input.

In addition to the seven plated holes marked A through G, a central capacitive button "H" is also available.

Another interesting applications is to use conductive paint to draw your own input surfaces in whichever way you want.

Our [learn.mikroe.page](#) has an interesting example scenario that could be applied in a retail store. We wired jars with different types of food in them to TouchClamp click. Placing your hand on any of the lids displays the nutritional values of the content inside.

Programming

The following code snippet shows how to identify which electrode was pressed using on a TFT display.

```
tc_hal_init( 0x5A );
tc_default_config();
Delay_ms( 200 );

while( 1 )
{
    if( tc_get_ts( ELE_A ) )
        UART1_Write_Text( "Electrode A touch detected" );
}
```

Code examples that demonstrate the usage of TK click with MikroElektronika hardware, written for mikroC for ARM, AVR, dsPIC, FT90x, PIC and PIC32 are available on Libstock (<http://libstock.mikroe.com/projects/view/1789/touchclamp-click>).

Resources

TouchClamp click



TouchClamp click

IC/Module	MPR121 (http://cache.nxp.com/files/sensors/doc/data_sheet/MPR121.pdf?fp=1&WT_TYPE=Data%20Sheets&WT_VENDOR=FREESCALE&WT_FILE_FORMAT=pdf&WT_ASSET=Documentation&fileExt=.pdf)
Interface	INT, I2C (SCL, SDA)
Power supply	3.3V
Website	www.mikroe.com/click/touchclamp (http://www.mikroe.com/click/touchclamp)

- Learn.mikroe.com tutorial on TouchClamp click (<http://learn.mikroe.com/energy-cost-effective-touchclamp/>)
- TouchClamp click code examples on Libstock (<http://libstock.mikroe.com/projects/view/1789/touchclamp-click>)
- MPR121 vendor's data sheet (http://cache.nxp.com/files/sensors/doc/data_sheet/MPR121.pdf?fp=1&WT_TYPE=Data%20Sheets&WT_VENDOR=FREESCALE&WT_FILE_FORMAT=pdf&WT_ASSET=Documentation&fileExt=.pdf)

Retrieved from "http://docs.mikroe.com/index.php?title=TouchClamp_click&oldid=331"

- This page was last modified on 20 May 2016, at 22:38.
- Content is available under Creative Commons Attribution unless otherwise noted.