

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









### **DESCRIPTION**

The MP44014 is a boundary conduction mode PFC controller that provides simple, high-performance, active power factor correction using minimal external components.

The output voltage is regulated accurately by a high-performance voltage mode amplifier with an accurate internal voltage reference.

The precise, adjustable output over-voltage protection greatly enhances system reliability.

The on-chip R/C filter on the current sense pin can potentially eliminate the external R/C filter.

The extremely low start-up current, quiescent current, and disable function reduces power consumption, resulting in excellent efficiency performance.

The MP44014 is available in a SOIC-8 package.

### **FEATURES**

- Boundary Conduction Mode PFC Controller for Pre-Regulator
- Zero-Crossing Compensation to Minimum THD of the AC Input Current
- Precise Adjustable Output Over-Voltage Protection
- Ultra-Low (15µA) Start-U p Current
- Low Quiescent Current (0.46uA) at OVP Condition
- On-Chip Filter on Current Sense Pin
- Disable Function on ZCS Pin
- -750mA/+800mA Peak Gate Drive Current
- Available in SOIC-8 Packages

### **APPLICATIONS**


- Offline Adaptors
- Electronic Ballast
- LLC Front End
- Other PFC Pre-Regulators

All MPS parts are lead-free, halogen-free, and adhere to the RoHS directive. For MPS green status, please visit the MPS website under Quality Assurance.

"MPS" and "The Future of Analog IC Technology" are registered trademarks of Monolithic Power Systems, Inc.

Other patents pending

### TYPICAL APPLICATION

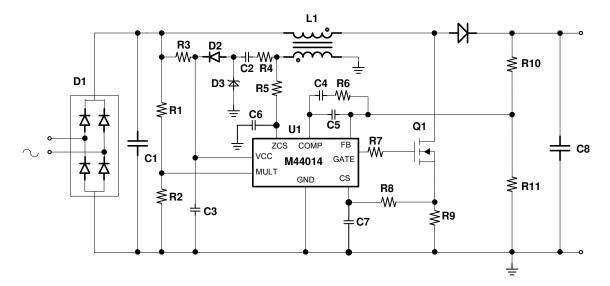



### ORDERING INFORMATION

Part Number	Package	Top Marking
MP44014GS*	SOIC-8	See Below


<sup>\*</sup> For Tape & Reel, add suffix -Z (e.g. MP44014GS-Z)

### **TOP MARKING**

MP44014 LLLLLLLL MPSYWW

MP44014: Part number LLLLLLL: Lot number MPS: MPS prefix Y: Year code WW: Week code

### **PACKAGE REFERENCE**

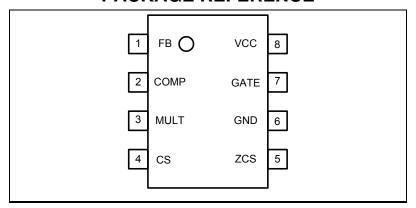

Supply voltage (VCC)0.5V to self limit Analog inputs and outputs $^{(2)}$ 0.3V to 6.5V ZCS max. current2.5mA to 10mA Continuous power dissipation $(T_A = +25^{\circ}C)^{(3)}$ SOIC-8
Storage temperature55°C to +150°C <b>Recommended Operating Conditions</b> (4)  Supply voltage (VCC)

**ABSOLUTE MAXIMUM RATINGS** (1)

Thermal Resistance <sup>(5)</sup>	$oldsymbol{ heta}_{JA}$	$oldsymbol{ heta}_{JC}$	
SOIC-8	90	45	.°C/W

#### NOTES:

- 1) Exceeding these ratings may damage the device.
- 2) Except ZCS pin, which is self limited.
- 3) The maximum allowable power dissipation is a function of the maximum junction temperature T<sub>J</sub>(MAX), the junction-to-ambient thermal resistance θ<sub>JA</sub>, and the ambient temperature T<sub>A</sub>. The maximum allowable continuous power dissipation at any ambient temperature is calculated by D(MAX)=(T<sub>J</sub>(MAX)-T<sub>A</sub>)/θ<sub>JA</sub>. Exceeding the maximum allowable power dissipation will produce an excessive die temperature, causing the regulator to go into thermal shutdown. Internal thermal shutdown circuitry protects the device from permanent damage.
- The device is not guaranteed to function outside of its operating conditions.
- 5) Measured on JESD51-7, 4-layer PCB.



### **ELECTRICAL CHARACTERISTICS**

 $V_{CC}$  = 15V,  $C_{GATE}$  = 1nF,  $T_J$  = -40°C~+125°C, unless otherwise noted.

Parameter	Symbol	Condition	Min	Тур	Max	Units
Supply Voltage						
Operating range	V <sub>cc</sub>	After turn on	10.7		21	V
Turn-on threshold	V <sub>CC_on</sub>		11	12.3	13.8	V
Turn-off threshold	$V_{CC\_off}$		8.7	9.8	10.8	V
Hysteresis	V <sub>CC_hys</sub>		2.1		3	V
Zener voltage	V <sub>z</sub>	I <sub>IN</sub> = 20mA	22	25	29	V
Supply Current					1	
Start-up current	I <sub>startup</sub>	V <sub>CC</sub> = 11V		15	30	μΑ
Quiescent current	Iq	No switch		2.5	3.2	mA
Operating current	I <sub>cc</sub>	$F_s = 70kHz,$ $C_{LOAD} = 1nF$		3.5	4.5	mA
Quiescent current	Iq	During OVP (either static or dynamic) or $V_{FB} \le 150 \text{mV}$		0.46	0.7	mA
Multiplier					<del>,</del>	
Input bias current	I <sub>MULT</sub>				-1	μΑ
Linear operation range	$V_{MULT}$		0		3	V
Output max. slope	$\Delta V_{CS}/\Delta V_{MULT}$	V <sub>MULT</sub> = 0~0.6V V <sub>COMP</sub> = upper clamp	1.60	1.90		V/V
Gain <sup>(6)</sup>	К	$V_{MULT} = 1V, V_{COMP} = 4V,$ $T_J = 25^{\circ}C$	0.5	0.6	0.7	1/V
Error Amplifier						
Feedback voltage	$V_{FB}$	T <sub>J</sub> = 25 °C	2.465	2.5	2.535	V
Feedback voltage line regulation	$V_{FB\_LR}$	VCC = 10.7V to 22V		2	5	mV
Feedback bias current	I <sub>FB</sub>	V <sub>FB</sub> = 2.6V			1	μA
Source current	I <sub>COMP_source</sub>	$V_{COMP} = 4V, V_{FB} = 2.4V,$ $T_{J} = 25^{\circ}C$	-2.7	-4.7	-6.9	mA
Sink current	I <sub>COMP_sink</sub>	$V_{COMP} = 4V, V_{FB} = 2.6V,$ $T_{J} = 25^{\circ}C$	3	5		mA
Upper clamp voltage	V <sub>COMP_H</sub>	$V_{FB} = 2V, I_{comp} = -0.5 mA$	5.5	6.1	6.5	V
Lower clamp voltage	V <sub>COMP_L</sub>	$V_{FB} = 2V$ , $I_{comp} = -0.5$ mA	2.0	2.15	2.3	V
Current Sense Comparator	1	p		I	1	<u> </u>
Input bias current	I <sub>CS</sub>	CS = 0			-1	μA
Turn-off delay	T <sub>DT</sub>	MULT = 0.2V		190		ns
LEB time	T <sub>LEB</sub>	MULT = 0.2V	45	70	95	ns
Current sense clamp voltage	V <sub>CS_Clamp</sub>		1.6	1.72	1.83	V
· · ·		V <sub>MULT</sub> = 0V		26		mV
Current sense offset	V <sub>CS_Offset</sub>	V <sub>MULT</sub> = 2.5V		8		mV
Zero Current Sensor	1			I	1	1
Upper clamp voltage	V <sub>ZCSclamp_H</sub>	I <sub>ZCS</sub> = 2.5mA	7.1	7.8	8.6	V
·· · · · · · · · · · · · · · · · · · ·				l	1	



# **ELECTRICAL CHARACTERISTICS** (continued)

 $V_{CC}$  = 15V,  $C_{GATE}$  = 1nF,  $T_J$  = -40°C~+125°C, unless otherwise noted.

Parameter	Symbol	Condition	Min	Тур	Max	Units	
Lower clamp voltage	V <sub>ZCSclamp_L</sub>	$I_{ZCS}$ = -2.5mA	0.2	0.5	0.7	V	
Zero current sensing threshold	V <sub>ZCS_H</sub>	V <sub>ZCS</sub> rising		2.1	2.21	V	
Zero current sensing threshold	V <sub>ZCS_L</sub>	V <sub>ZCS</sub> falling	1.45	1.56	1.66	V	
ZCS_DISABLE threshold	V <sub>ZCS_DISABLE_</sub>		140	185	230	mV	
ZCS_EN threshold	V <sub>ZCS_EN</sub>		260	320	380	mV	
Source current capability	I <sub>ZCS_source</sub>		-1.8			mA	
Restart current after disable	I <sub>ZCS_res</sub>		55	85		μA	
Re-Starter	10=10						
Re-start time	T <sub>start</sub>		80	175	280	μs	
Over Voltage							
Dynamic OVP current	I <sub>OVP</sub>		35	40	45	μA	
Hysteresis	I <sub>OVP_Hys</sub>			30		μA	
Static OVP threshold	$V_{OVP}$		2.15	2.25	2.35	V	
Gate Driver							
	V <sub>OH</sub>	I <sub>GDsource</sub> = 20mA		2.4	3.1	V	
Dropout voltage	VOH	I <sub>GDsource</sub> = 200mA		3.9	5.0	V	
	$V_{OL}$	I <sub>GDsink</sub> = 200mA		0.9	1.9	V	
Voltage fall time	T <sub>f</sub>			30	70	ns	
Voltage rise time	Tr			40	80	ns	
Max. output drive voltage	$V_{D\_max}$		12	13.5	15.5	V	
Source current capability	I <sub>Gate_source</sub>			-750		mA	
Sink current capability	I <sub>Gate_sink</sub>			800		mA	
UVLO saturation voltage	V <sub>Saturation</sub>	VCC = 0 to VCC_ON, I <sub>Gate_sink</sub> = 10mA			0.3	V	

#### NOTES:


<sup>6)</sup> The multiplier output is given by:  $V_{cs} = K \cdot V_{MUTL} \cdot (V_{COMP} - 2.5)$ .

<sup>7)</sup> Guaranteed by design.




### TYPICAL PERFORMANCE CHARACTERISTICS


# Supply Current vs. **Supply Voltage**




# Supply Current vs.T.I




### Start-Up & UVLO vs.T.I




VCC Zener Voltage vs. TJ




Feedback Reference vs. TJ




Delay-to-Output vs. T<sub>J</sub>




**OVP Current vs.TJ** 



**Multiplier Characteristic** 




Multiplier Gain vs.TJ







# TYPICAL PERFORMANCE CHARACTERISTICS (continued)

ZCS Clamp Levels vs. TJ












# TYPICAL PERFORMANCE CHARACTERISTICS (continued)

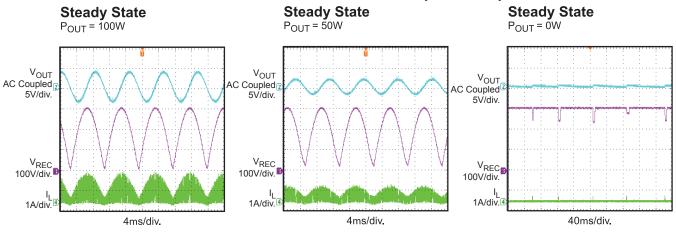

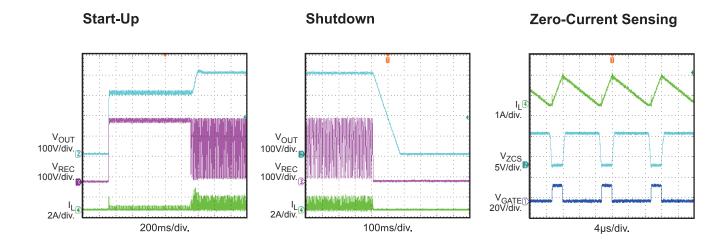

© 2015 MPS. All Rights Reserved.

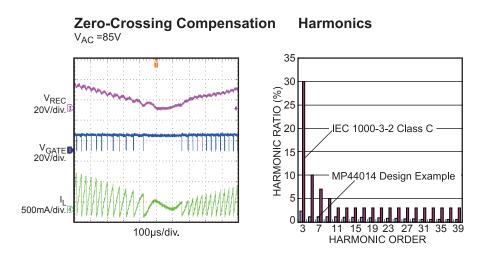




# **PIN FUNCTIONS**

Pin#	Name	Description
1	FB	Feedback. The output voltage is fed into FB through a resistor divider.
2	COMP	<b>Output of the error amplifier.</b> A compensation network is connected between COMP and FB.
3	MULT	<b>Input of the multiplier.</b> Connect MULT to the rectified main voltage via a resistor divider to provide the sinusoidal reference for the current control loop.
4	CS	<b>Current sense.</b> The current through the MOSFET is fed into CS via a resistor. The resulting voltage on CS is compared with the output of the internal multiplier to get an internal sinusoidal-shaped reference to determine the MOSFET's turn-off. The on-chip R/C filter can reduce high frequency noise on CS. Also, suggest to add a RC filter on the CS pin in case of switching noise is too large.
5	ZCS	<b>Inductor's zero-crossing current sensing input</b> . A negative transition edge triggers the MOSFET's turn-on. Suggest to connect a 22pF cap from this ZCS to GND to tune ZVS point.
6	GND	Ground.
7	GATE	<b>Gate driver output.</b> The high output current of the gate driver is able to drive a low-cost power MOSFET. The high-level voltage of GATE is clamped to 12V in case GATE is supplied with a high VCC.
8	VCC	<b>Supply voltage for both the signal path of the IC and the gate driver.</b> A bypass capacitor from VCC to ground is needed to reduce noise.



# **FUNCTIONAL BLOCK DIAGRAM**

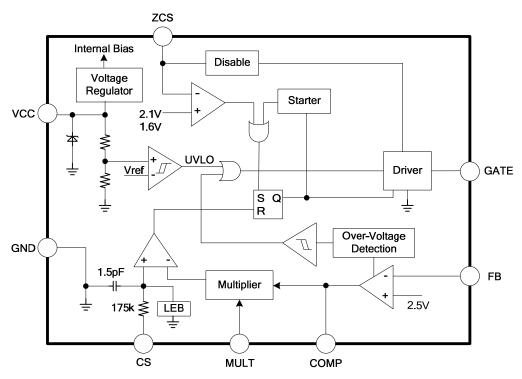

**Figure 1: Functional Block Diagram** 

© 2015 MPS. All Rights Reserved.



#### **OPERATION**

The MP44014 is a boundary conduction mode PFC controller optimized for the PFC preregulator up to 300W and fully complies with IEC1000-3-2 specification.

### **Output Voltage Regulation**

The output voltage is sensed at FB through a resistor divider from the output voltage to ground. The accurate on-chip reference voltage and the high performance error amplifier regulate the output voltage accurately.

### Over-Voltage Protection (OVP)

The MP44014 offers two stages of over-voltage protection: dynamic over-voltage protection and static over-voltage protection. With two-stage protection, the circuit operates reliably.

The MP44014 achieves OVP by monitoring the current flow through COMP.

During steady-state operation, the current flow through the high-side feedback resistor (R9) and the low-side feedback resistor (R10) is calculated with Equation (1):


$$I_{R9} = \frac{V_{O} - V_{FB}}{R9} = I_{R10} = \frac{V_{FB}}{R10}$$
 (1)

If there is an abrupt rise on the output ( $\Delta V_O$ ) and the compensation network connected between FB and COMP takes time to achieve high power factor (PF) due to the long RC time constant, the voltage on FB will still be kept at the reference value. The current through R10 remains equal to  $V_{FB}/R10$ . However, the current through R9 is calculated with Equation (2):

$$\dot{I}_{R9} = \frac{V_{O} + \Delta V_{O} - V_{FB}}{R9}$$
 (2)

This current has to flow into COMP. Simultaneously, this current is monitored inside the chip. If the current rises to 35µA, the output voltage of the multiplier will be forced to decrease, and the energy delivered to the output will be reduced. If this current continues to rise to about 40µA, the dynamic OVP can be triggered. Consequently, the gate driver is blocked to turn off the external power MOSFET, and the device enters an idle state. This state is maintained until the current falls below 10µA, the point at which the internal starter will be re-enabled and allow the switching to restart.

When the load is very light, the output voltage tends to stay steadily above the nominal value. In this condition, the error amplifier output will saturate low. When the error amplifier output is lower than 2.25V, static OVP will be triggered. Consequently, the gate driver will be blocked to turn off the external power MOSFET, and the device will enter an idle state. Normal operation resumes once the error amplifier output returns to the regulated region (see Figure 2).



**Figure 2: OVP Detector Block** 

#### **Disable Function**

The MP44014 can be disabled by pulling the zero-current sensing (ZCS) pin lower than 190mV. This helps to further reduce quiescent current when the PFC pre-regulator needs to be shut down. After releasing ZCS, it will stay at a lower clamp voltage when there is no external voltage from the auxiliary winding (see Figure 3).




Figure 3: ZCS Triggering and Disable Block



#### **Boundary Conduction Mode**

When the current of the boost inductor reaches zero, the voltage on the inductor is reversed. ZCS then generates the turn-on signal of the MOSFET by sensing the falling edge of the voltage on the auxiliary winding coupled with the inductor. If the ZCS voltage rises above 2.1V, the comparator waits until the voltage falls below 1.6V. Once the voltage falls below 1.6V, the MP44014 turns on the MOSFET. The 7.8V high clamp and 0.55V low clamp protect ZCS. The internal 175µs timer generates a signal to turn on the MOSFET if the driver signal has been low for more than 175µs. This also allows the MOSFET to turn on during the start-up period since no signal is generated from ZCD during start-up.

### **Zero-Crossing Compensation**


The MP44014 offers 30mV voltage offset for the multiplier output near the zero crossing of the line voltage (which can force the circuit to process more energy at the bottom of the line voltage). With this function, the THD of the current is reduced.

To prevent redundant energy, this offset is reduced as the instantaneous line voltage increases. Therefore the offset will be negligible near the top of the line voltage.

#### **Power Factor Correction**

The MP44014 senses the inductor current through the current sense pin and compares it

the sinusoidal-shaped signal, which is generated from the output of the multiplier. When the external power MOSFET turns on, the inductor current rises linearly. When the peak current hits the sinusoidal-shaped signal, the external power MOSFET begins to turn off, and the diode turns on. Also, the inductor current begins to fall. When the inductor current reaches zero, the power MOSFET begins to turn on again, which causes the inductor current to start rising again. The power circuit works in boundary conduction mode, and the envelope of the inductor current is sinusoidal shaped. The average input current is half of the peak current, so the average input current is also sinusoidal shaped. A high power factor can be achieved through this control method (see Figure 4).



**Figure 4: Inductor Current Waveform** 

The control flow chart of the MP44014 is shown in Figure 5.


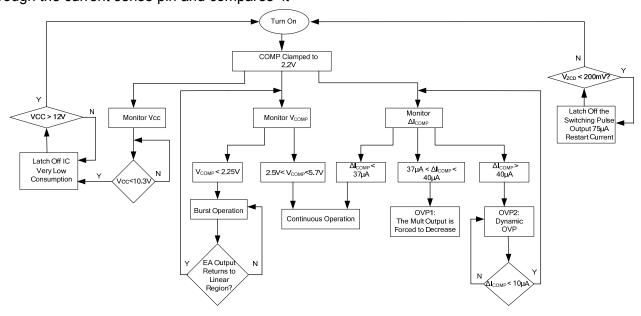



Figure 5: Control Flow Chart




### PACKAGE INFORMATION

### SOIC-8







**TOP VIEW RECOMMENDED LAND PATTERN** 



**FRONT VIEW** 



SIDE VIEW



**DETAIL "A"** 

#### **NOTE:**

- 1) CONTROL DIMENSION IS IN INCHES. DIMENSION IN **BRACKET IS IN MILLIMETERS.**
- 2) PACKAGE LENGTH DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.
- 3) PACKAGE WIDTH DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSIONS.
- 4) LEAD COPLANARITY (BOTTOM OF LEADS AFTER FORMING) SHALL BE 0.004" INCHES MAX.
- 5) DRAWING CONFORMS TO JEDEC MS-012, VARIATION AA.
- 6) DRAWING IS NOT TO SCALE.

NOTICE: The information in this document is subject to change without notice. Users should warrant and guarantee that third party Intellectual Property rights are not infringed upon when integrating MPS products into any application. MPS will not assume any legal responsibility for any said applications.