

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









### **VIDEO SUB-CARRIER SIGNAL QUADRUPLER**

### **■ GENERAL DESCRIPTION**

The **NJM2240** is the quadruple oscillator of video band subcarrier frequency with PLL circuit technique. The **NJM2240** is suit to standard clock generator of CCD clock and on-screen display.


### **■ FEATURES**

- Operating Voltage (+4.7V to +5.3V)
- High Input Sensitivity
- Maximum Oscillator Frequency
- Ouadrupler Output
- Package Outline DIP8, DMP8
- Bipolar Technology

### **■ APPLICATION**

• VCR Video Camera AV-TV Video Disc Player

### **■ PIN CONFIGURATION**



### PIN FUNCTION

- 1. f<sub>SC</sub> Input
- 2. Detection Filter
- 3. GND
- 4. Oscillator Output
- 5. Oscillator C
- 6. V<sup>+</sup>
- 7. Oscillator R
- 8. NC


NJM2240D NJM2240M

# ■ PACKAGE OUTLINE



NJM2240D NJM2240M

### ■ BLOCK DIAGRAM & EXTERNAL COMPONENTS

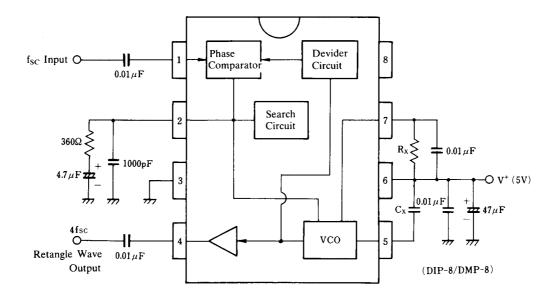

There is stray capacity assembled on PC board, and so select Rx, Cx to the value which pin 2 voltage (search voltage at VCC locked) becomes about 2V. Cx>4pF,  $Rx>2.7k\Omega$ 

	NTSC	PAL		
	4 Multiplier	4 Multiplier		
Сх	6р	5p		
Rx	4.3k	3.3k		

### ■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)


PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V <sup>+</sup>	8	V
Input voltage	V <sub>IN</sub>	GND-0.3 to V <sup>+</sup> +0.3	V
Power Dissipation	P <sub>D</sub>	(DIP8) 500 (DMP8) 300	mW mW
Operating Temperature Range	T <sub>opr</sub>	-20 to +75	°C
Storage Temperature Range	T <sub>stg</sub>	-40 to +125	°C

### ■ ELECTRICAL CHARACTERISTICS

(V<sup>+</sup>=5V, Ta=25°C)


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Recommended Oper. Voltage Range	V <sup>+</sup>		4.7	5.0	5.3	V
Operating Current	Icc	S1=1, S2=1, input Vi1 : 3.58MHz Count Current	7	10	13	mA
Input Voltage Swing Range	V <sub>fsc</sub>	S1=1, S2=1, input Vi1: 3.58 or 4.43MHz (sine wave), guaranteed Vi1 voltage range.	0.12	1.0	2.0	Vp-p
Input Sensitivity	Vis	S1=1, S2=1, input Vi1 : 3.58 or 4.43MHz (sine wave), actually tested minimum Vi1 voltage.	-	0.05	-	Vp-p
VCO Oscillation Swing	V <sub>O4</sub>	S1=1, S2=2, input Vi1 : 3.58MHz, 1.0Vp-p.	0.7	0.9	1.1	Vp-p
fsc Leakage	L <sub>fsc</sub>	S1=1, S2=2, input Vi1 : 3.58MHz, 1.0Vp-p. V <sub>04</sub> (fsc level/4fsc level)	-	-50	-	dB
4fsc Output Duty	D <sub>4fsc</sub>	S1=1, S2=2, input Vi1 : 3.58MHz, 1.0Vp-p, $V_{O4}$ output signal duty.	45	50	55	%

### **■ TEST CIRCUIT**

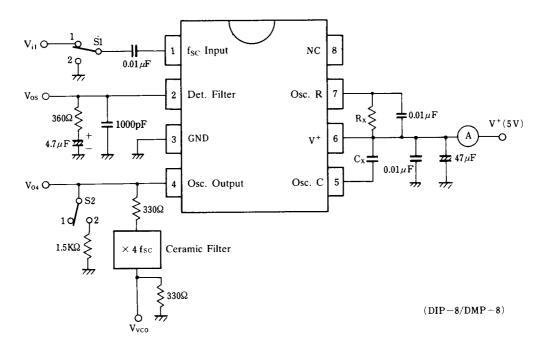

- (note 1): Rx, Cx accuracy: less than ±1%
- (note 2): Cx is not considered pin 5 stray capacitance. VCO free-run frequency is affected by stay capacitance of PC board, socket and others.
- (note 3): The NJM2240 is produced by high frequency wafer process and some of pin may be weak against surge voltage.
- (note 4): Pin 2 filter must be connected to ground.

### **■ TYPICAL CHARACTERISTICS**

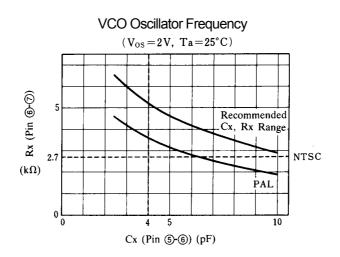

### [CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.