



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Housing - HC-MOD-K-TMS-M1M20-G-OPE - 1408546

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Plastic sleeve housing for modules for a module slot, without PE marking, with snap locking

Key commercial data

Packing unit	0
Minimum order quantity	1
Catalog page	Page 554 (PC-2011)
GTIN	 4 046356 619288
Custom tariff number	85389099
Country of origin	GERMANY

Technical data

General data

Height	77.9 mm
Width	26.5 mm
Length	60 mm
Color	light gray
Locking type	Clip locking
No. of cable exits	1
Cable exit	Straight
Screw connection	With
Type of the screw connection	1x M20
External cable diameter	6 mm ... 13 mm
Degree of protection for housing	IP65 protection when the connector is inserted
Ambient temperature (operation)	-40 °C ... 85 °C
Housing material	polycarbonate
Cable gland material	Polyamide
Cable seal material	NBR
Inflammability class according to UL 94	V0
Assembly instructions	up to 50 V (missing PE)

Housing - HC-MOD-K-TMS-M1M20-G-OPE - 1408546

Classifications

eclass

eCl@ss 4.0	23090101
eCl@ss 4.1	23090101
eCl@ss 5.0	23090101
eCl@ss 5.1	23090101
eCl@ss 6.0	23090101
eCl@ss 7.0	23090101

etim

ETIM 4.0	EC000437
----------	----------

unspsc

UNSPSC 6.01	31161807
UNSPSC 7.0901	31161807
UNSPSC 11	31161807
UNSPSC 12.01	31161807
UNSPSC 13.2	31161807

Accessories

Accessories

Coding profile - HC-MOD-K-CP - 1408562




Coding profile for HC-MOD-K... housing

Drawings

Housing - HC-MOD-K-TMS-M1M20-G-OPE - 1408546

Dimensioned drawing

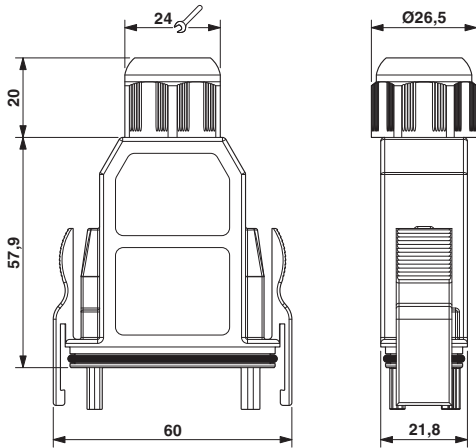

Dimensional drawing

© Phoenix Contact 2012 - all rights reserved
<http://www.phoenixcontact.com>