



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PA32-28(Z) Data Sheet



32 pin PLCC socket/28 pin DIP 0.6" plug

Supported Device/Footprints

This adapter allows programming of several 32 pin PLCC and CLCC devices in their 28 pin DIP footprint.

Mfgr	Device	Package	Device	Footprint Plug
Several	27C64	PLCC	27C64	28 Pin DIP
	27C128		27C128	
	27C256		27C256	
	27C512		27C512	

Adapter Dimensions

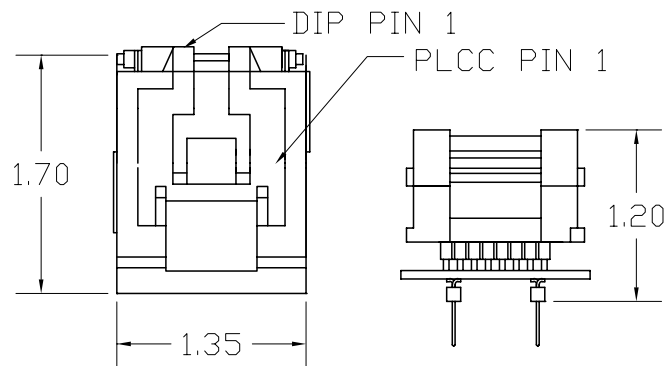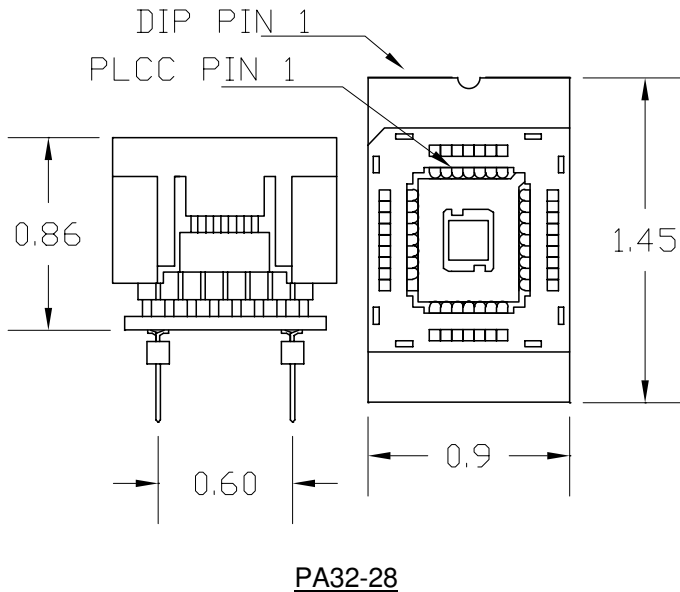

Adapter Construction

The adapter is made up of 2 sub-assemblies. They assemble via connectors making the adapter modular. This way the sub-assemblies can be replaced when they wear out.

When disassembling the adapter take care not to bend the pins. When reassembling the adapter note the pin 1 indicators to align the parts correctly.

PA32-28 Sub-assemblies

Test Socket

PLCC Auto-Eject test socket:

Yamaichi Part #: IC120-0324-309

LSC Part #: 32-309

PLCC Lidded ZIF Socket:

Yamaichi Part #: IC51-0324-453

LSC Part #: 32-453

PA32-28(Z)

Accepts the socket and performs the wiring in the Adapter Wiring section.

Adapter Wiring

The following chart shows the connections from the PLCC device to the adapter's DIP plug.

DEVICE	PLUG	PLUG	DEVICE
1	NC	28	32
2	1	27	31
3	2	26	30
4	3	25	29
5	4	24	28
6	5	23	27
7	6	NC	26
8	7	22	25
9	8	21	24
10	9	20	23
11	10	19	22
12	NC	18	21
13	11	17	20
14	12	16	19
15	13	15	18
16	14	NC	17

Pin skips are 1, 12, 17, 26.