

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







MALLORY Mallory Sonalert Products Inc.	Part #	PB-2015WQ
Sales Outline Drawing	Revision	A


## **Specifications:**

cutions.	
Oscillation Frequency (Hz)	$1500 \pm 200$
Operating Voltage (Vp-p)	$2.0 \sim 5.0$
Rated Voltage (Vp-p)	3.0
Input Watt (W/max)	0.15
Sound Pressure Level (dB/min)	75 at 10cm at Rated Voltage
Coil Resistance ( $\Omega$ )	$8.0 \pm 2$
Operating Temperature (°C)	$-20 \sim +70$
Storage Temperature (°C)	<b>-</b> 30 ∼ +80
Housing	ABS 757 UL94HB plastic resin
	(Color: Black)
Lead Wire	28 AWG
Weight (Grams)	3.4
Condition by wave soldering (°C)	$245 \pm 5 / 3 \pm 0.5 \text{ sec}$
Condition by hand soldering (°C)	$350 \pm 20$ / within 5 sec
Options	For other options contact factory
1/0.1	D HCC P 4


PS:  $\overline{Vp-p} = 1/2 duty$ , square wave

**RoHS Compliant** 

## **Dimensions:** (units: mm)

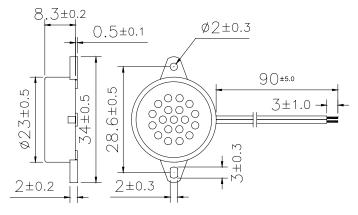

## **Recommended Driving Circuit:**

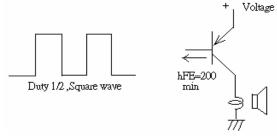

The base current Ib should be high enough so that it saturates the collector current of the transistor with the CB load.