



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





SparkFun Breadboard Power Supply USB - 5V/3.3V

PRT-08376 ROHS ✓

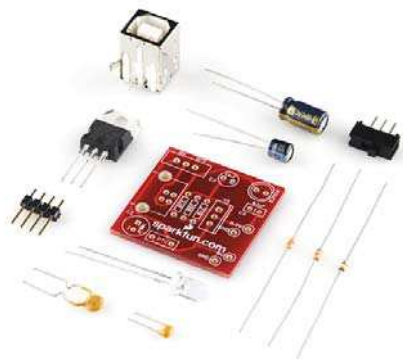

Description: A very simple breadboard power supply kit that takes power from any USB port and outputs a fuse protected and regulated 3.3V. The .1" headers are mounted on the bottom of the PCB for simple insertion into a breadboard. Pins labeled 5V/GND 3.3V/GND plug directly into the power lines.

When you plug this board into a breadboard you must be aware that the unused power and ground pins will short if they are inserted into a bread board row. To avoid this problem, orient the board so that the unused power pins are left off the side of the breadboard. You can also orient the board sideways and utilize both 5V and 3.3V at the same time.

USB v2.0 specifies a max of 500mA at 5V. The on-board fuse limits the current to 500mA. Board has a handy On/Off switch.

Comes as a **bag of parts** kit and is easily assembled if you can follow the silkscreen indicators and have beginning experience with a soldering iron. You will need to read the resistor bands or use a multimeter to determine the resistor sizes.

Check out our [Unregulated Power Supply Tutorial!](#)

Kit Contains:

- USB type B connector
- TO-220 Voltage Regulator (LM317 1.5A max current)
- PTC Resettable Fuse
- 100uF 35V Capacitor
- 10uF 25V Capacitor
- 0.1uF 50V Capacitor
- Power LED
- SPDT Slide Switch
- 4pcs 0.1" Header Pins
- 330 Resistor 1/6W
- 390 Resistor 1/6W
- 240 Resistor 1/6W
- Bare PCB with Silkscreen Indicators