



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

Intellimod™ Module
Application Specific IPM
4 Amperes/600 Volts

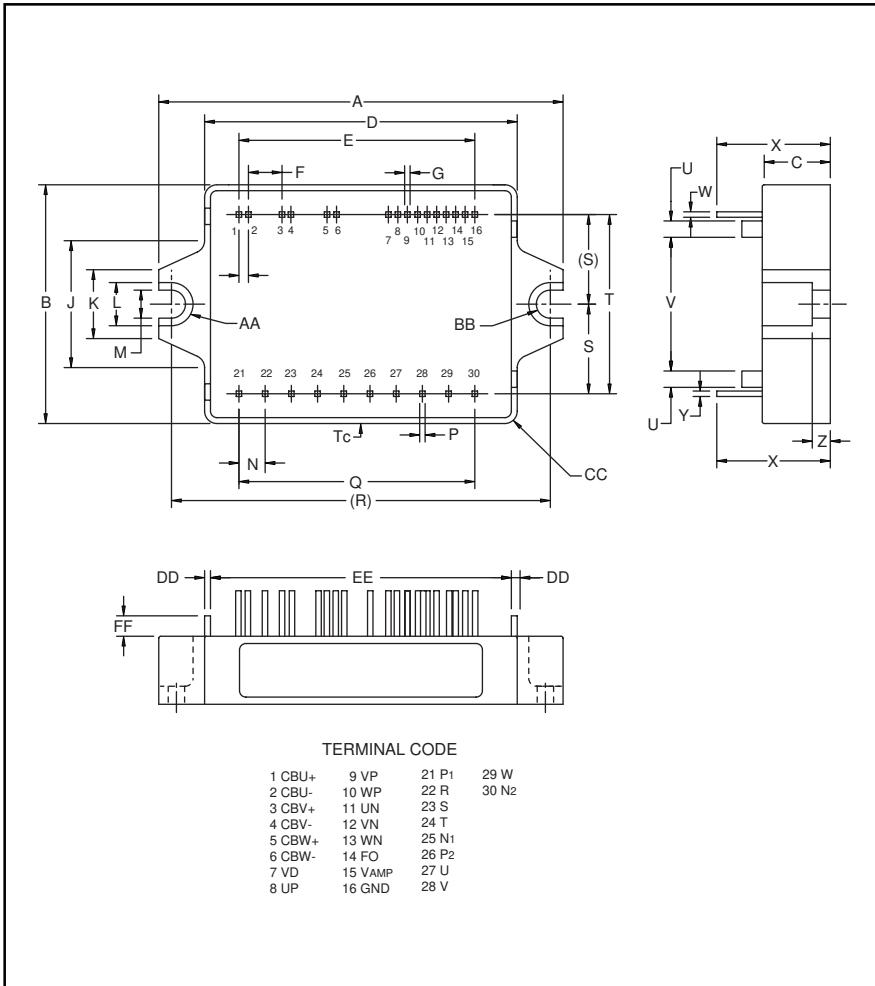

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	2.91±0.04	74.0±1.0
B	2.48±0.04	63.0±1.0
C	0.34±0.02	8.5±0.5
D	2.36	60.0
E	1.42	36.0
F	0.16	4.0
G	0.02	0.6
H	0.08	2.0
J	0.98	25.0
K	0.59	15.0
L	0.35	9.0
M	0.18	4.5
N	0.20	5.08
P	0.05	1.2
Q	1.80	45.72

Dimensions	Inches	Millimeters
R	2.72	69.0
S	1.01	25.7
T	2.00±0.03	50.7±0.8
U	0.16	4.0
V	1.58	40.0
W	0.02	0.4
X	0.65±0.02	16.5±0.5
Y	0.02	0.6
Z	0.12±0.02	3.0±0.5
AA	0.18 Rad.	4.5 Rad.
BB	0.09 Rad.	2.25 Rad.
CC	0.12 Rad.	3.0 Rad.
DD	0.8	2.0
EE	2.19	55.5
FF	0.114	3.5



Description:

Powerex Application Specific IPMs (ASIPMs) are intelligent power modules that integrate power devices, gate drive and protection circuitry in a compact package for use in small inverter applications up to 20kHz. Use of application specific HVICs allow the designer to reduce inverter size and overall design time.

Features:

- Compact Packages
- 3 Phase Converter Bridge Built-in
- Integrated HVICs
- Direct Connection to DSP/CPU

Applications:

- Small Motor Control
- Small Servo Motors
- General Purpose Inverters
- Pump and HVAC Motor Control

Ordering Information:

PS11032 is a 600V, 4 Ampere Application Specific Intelligent Power Module.



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PS11032

Intellimod™ Module

Application Specific IPM

4 Amperes/600 Volts

Absolute Maximum Ratings, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	PS11032	Units
Power Device Junction Temperature*	T_j	-20 to 125	°C
Storage Temperature	T_{stg}	-40 to 125	°C
Case Operating Temperature (See T_C Measure Point Illustration)	T_C	-20 to 100	°C
Mounting Torque, M4 Mounting Screws	—	13	in-lb
Module Weight (Typical)	—	70	Grams
Isolation Voltage**	V_{ISO}	2500	Volts

*The indicated values are specified considering the safe operation of all the parts within the ASIPM. The maximum rating for the ASIPM power chips (IGBT & FWDi) is $T_j < 150$.

**60 Hz sinusoidal AC applied between all terminals and the base plate for 1 minute.

IGBT Inverter Sector

Supply Voltage (Applied between P2 - N2)	V_{CC}	450	Volts
Supply Voltage, Surge (Applied between P2 - N2, Surge-Value)	$V_{CC(\text{surge})}$	500	Volts
Each IGBT Collector-Emitter Static Voltage (Applied between P2-U.V.W, U.V.W-N2)	V_P or V_N	600	Volts
Each IGBT Collector-Emitter Switching Voltage (Applied between P2-U.V.W, U.V.W-N2 (Pulse))	$V_{P(S)}$ or $V_{N(S)}$	600	Volts
Each IGBT Collector Current, $T_C = 25^\circ\text{C}$, "()" means I_C Peak Value	$\pm I_C (\pm I_{CP})$	$\pm 4 (\pm 8)$	Amperes

Converter Sector

Repetitive Peak Reverse Voltage	V_{RRM}	800	Volts
Recommended AC Input Voltage	E_a	220	Vrms
DC Output Current (3-phase Rectifying Circuit)	I_{DC}	10	A
Surge (Non-repetitive) Forward Current (1 Cycle at 60Hz, Peak Value Non-repetitive)	I_{FSM}	100	A
I^2t for Fusing (Value for One Cycle of Surge Current)	I^2t	42	A^2s

Control Sector


Supply Voltage	V_D, V_{DB}	-0.5 ~ 20	Volts
Input Signal Voltage	V_{CIN}	-0.5 ~ 7.5	Volts
Fault Output Supply Voltage	V_{FO}	-0.5 ~ 7.5	Volts
Fault Output Current	I_{FO}	15	mA
DC-Link IGBT Current Signal Amp Output Current	I_{AMP}	1	mA

PS11032
Intellimod™ Module
Application Specific IPM
4 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
IGBT Inverter Sector						
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$I_C = 4\text{A}, T_j = 25^\circ\text{C}, V_D = V_{DB} = 15\text{V},$ Input = ON (Shunt Voltage Drop Not Included)	—	—	2.9	Volts
Diode Forward Voltage	V_{EC}	$T_j = 25^\circ\text{C}, -I_C = 4\text{A}$	—	—	2.9	Volts
Converter Diode Voltage	V_{FR}	$T_j = 25^\circ\text{C}, I_{FR} = 5\text{A}$	—	—	1.5	Volts
Converter Diode Reverse Current	I_{RRM}	$V_R = V_{RRM}, T_j = 125^\circ\text{C}$	—	—	8	mA
Switching Times	t_{on}	1/2 Bridge Inductive, Input = $5\text{V} \leftrightarrow 0\text{V}$,	0.3	0.6	1.5	μs
	$t_{C(on)}$	$V_{CC} = 300\text{V}, I_C = 4\text{A}, T_j = 125^\circ\text{C},$	—	0.43	0.8	μs
	t_{off}	$V_D = 15\text{V}, V_{DB} = 15\text{V}$	—	1.6	2.5	μs
	$t_{C(off)}$	Note: t_{on}, t_{off} include delay time of	—	0.5	1.2	μs
FWDi Reverse Recovery Time	t_{rr}	the internal control circuit.	—	0.12	—	μs
Short Circuit Endurance (Output, Arm, and Load Short-Circuit Modes)		$@V_{CC} \leq 400\text{V}, \text{Input} = 5\text{V} \rightarrow 0\text{V}$ (One-shot), $-20^\circ\text{C} \leq T_j(\text{start}) \leq 125^\circ\text{C},$ $13.5\text{V} \leq V_D = V_{DB} \leq 16.5\text{V}$	<ul style="list-style-type: none"> No Destruction F_O Output by Protection Operation 			
Switching SOA		$@V_{CC} \leq 400\text{V}, \text{Input} = 5\text{V} \rightarrow 0\text{V},$ $T_j \leq 125^\circ\text{C}, I_C < \text{OC Trip Level},$ $13.5\text{V} \leq V_D = V_{DB} \leq 16.5\text{V}$	<ul style="list-style-type: none"> No Destruction No Protecting Operation F_O Output 			

T_C Measure Point

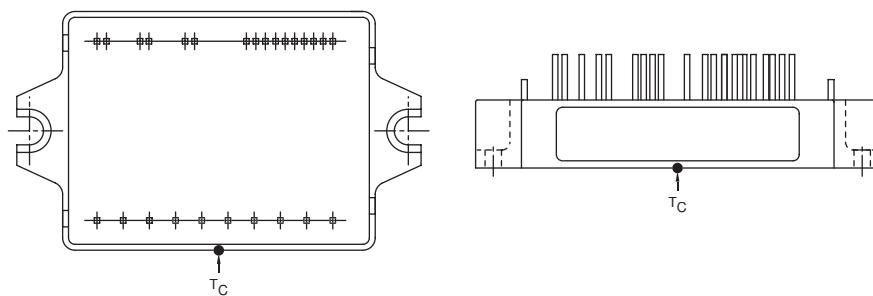



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

PS11032

Intellimod™ Module

Application Specific IPM

4 Amperes/600 Volts

Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units	
Control Sector							
Circuit Current (Average)	I_D	$T_j = 25^\circ\text{C}, V_D = 15\text{V}, V_{IN} = 5\text{V}$	—	—	50	mA	
	I_{DB}	$T_j = 25^\circ\text{C}, V_D = V_{DB} = 15\text{V}, V_{IN} = 5\text{V}$	—	—	5	mA	
Input ON Threshold Voltage	$V_{th(on)}$		0.8	1.4	2.0	Volts	
Input OFF Threshold Voltage	$V_{th(off)}$		2.5	3.0	4.0	Volts	
Input Pull-up Resistor	R_i	Applied between Input Terminal-inside Power Supply	—	50	—	kΩ	
PWM Input Frequency	f_{PWM}	$T_C \leq 100^\circ\text{C}, T_j \leq 125^\circ\text{C}$	1	—	15	kHz	
Arm Shoot-through Blocking Time*	t_{DEAD}	Relates to Corresponding Inputs $T_C = -20^\circ\text{C} \sim 100^\circ\text{C}$	2.2	—	—	μS	
Input Interlock Sensing	t_{int}	Relates to Corresponding Input	—	100	—	ns	
Inverter DC-link IGBT Current	V_{amp} 100%	$I_C = I_{OP}(100\%), V_D = 15\text{V}, T_j = 25^\circ\text{C}$	1.5	2.0	2.5	Volts	
Sense Voltage Output Signal**	V_{amp} 200%	$I_C = I_{OP}(200\%), V_D = 15\text{V}, T_j = 25^\circ\text{C}$	3.0	4.0	5.0	Volts	
Inverter DC-link IGBT Current	V_{amp} 250%	$I_C = I_{OP}(250\%), V_D = 15\text{V}$	5.0	—	—	Volts	
Sense Voltage Output Limit**	V_{amp} 0%	$I_C = I_{OP}(0\%), V_D = 15\text{V}$	—	50	100	mV	
Over-Current Trip Level	OC		4.3	5.3	8.0	Amperes	
Over-Current Delay Time	t_{OC}	$T_j = 25^\circ\text{C}$	—	10	—	μS	
Short-Circuit Trip Level	SC		—	8.0	—	Amperes	
Short-Circuit Delay Time	t_{SC}		—	2	—	μS	
	Trip Level	UV_D	11.0	12.0	13.0	Volts	
Supply Circuit	Reset Level	UV_{Dr}	11.5	12.5	13.5	Volts	
Under-Voltage	Trip Level	UV_{DB}	$T_C = T_j = 25^\circ\text{C}$	10.1	10.8	11.6	Volts
Protection	Reset Level	UV_{DBr}		10.6	11.3	12.1	Volts
	Delay Time	t_{dV}	—	10	—	μS	
Fault Output Pulse Width***	t_{FO}	$T_j = 25^\circ\text{C}$	1.0	1.8	—	mS	
Fault Output Current***	$I_{FO(H)}$	Open Collector Output	—	—	1	μA	
	$I_{FO(L)}$		—	—	15	mA	

*The dead-time has to be set externally by the CPU; it is not part of the ASIPM internal functions.

**Refer to the graph on next page.

***Fault output signalling is given only when the internal OC, SC, and UV protection circuits are activated. The OC, SC and UV protection (and fault output) operate for the lower arms only. The OC and SC protection fault output is given in a pulse format while that of UV protection is maintained throughout the duration of the under-voltage condition.


PS11032
Intellimod™ Module
Application Specific IPM
 4 Amperes/600 Volts

Thermal Characteristics

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case	R _{th(j-c)Q}	Each IGBT	—	—	6.1	°C/Watt
	R _{th(j-c)D}	Each FWDi	—	—	6.1	°C/Watt
	R _{th(j-c)DR}	Each Converter	—	—	4.8	°C/Watt
Contact Thermal Resistance	R _{th(c-f)}	Case to Fin Per Module. Thermal Grease Applied	—	—	0.074	°C/Watt

Recommended Conditions for Use

Characteristic	Symbol	Condition	Min.	Typ.	Value	Units
Supply Voltage	V _{CC}	Applied across P2-N2 Terminals	—	300	400	Volts
Control Supply Voltage	V _D	Applied between V _D -GND	13.5	15.0	16.5	Volts
	V _{DB}	Applied between CBU+ & CBU-, CBV+ & CBV-, CBW+ & CBW-	13.5	15.0	16.5	Volts
Control Supply dv/dt	dV _D /dt, dV _{DB} /dt		-1	—	1	V/μs
Input ON Voltage	V _{CIN(on)}	Applied between	0	—	0.8	Volts
Input OFF Voltage	V _{CIN(off)}	U _P , V _P , W _P , U _N , V _N , W _N -GND	4.0	—	5.0	Volts
Module Case Operating Temperature	T _C		—	—	100	°C
PWM Input Frequency	f _{PWM}	T _C ≤ 100°C, T _j ≤ 125°C	—	—	15	kHz
Allowable Minimum Input On-pulse Width	t _{xx}		1	—	—	μS
Arm Shoot-through Blocking Time	t _{DEAD}	Relate to Corresponding Inputs	2.2	—	—	μS

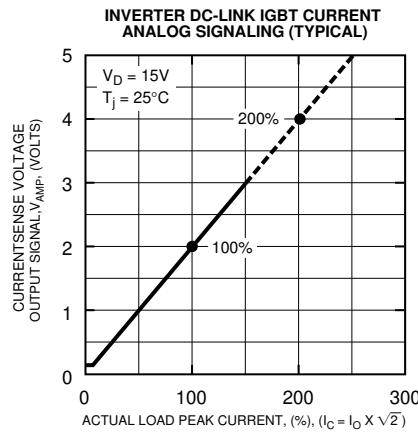

PS11032

Intellimod™ Module

Application Specific IPM

4 Amperes/600 Volts

Functional Block Diagram

