



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Thermally-Enhanced High Power RF LDMOS FETs 150 W, 420 – 500 MHz


### Description

The PTFA041501GL and PTFA041501HL are 150-watt LDMOS FETs designed for ultra-linear CDMA power amplifier applications. They are available in thermally-enhanced plastic open-cavity packages with copper flanges. Manufactured with Infineon's advanced LDMOS process, these devices provide excellent thermal performance and superior reliability.

PTFA041501GL  
 Package PG-63248-2



PTFA041501HL  
 Package PG-64248-2

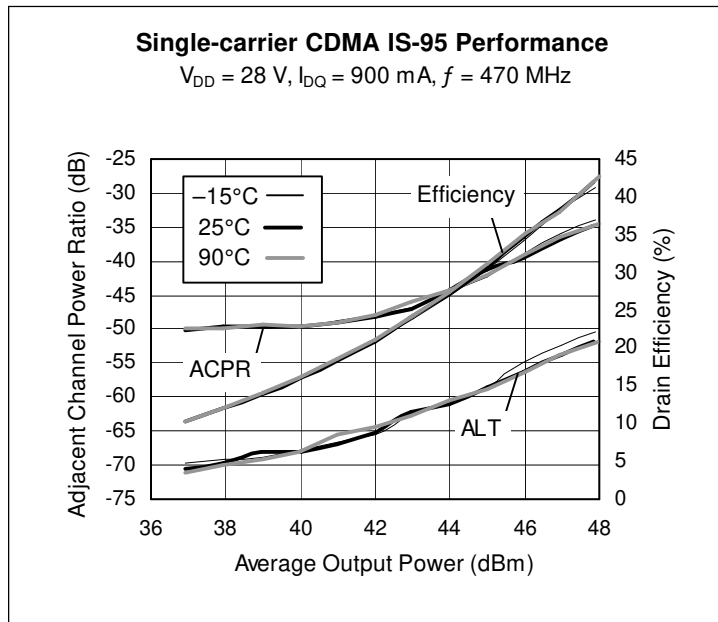

### Features

- Thermally-enhanced plastic open-cavity (EPOC™) packages with copper flanges, Pb-free and RoHS compliant
- Broadband internal matching
- Typical CDMA performance at 470 MHz, 28 V
  - Average output power = 60 W
  - Linear Gain = 21 dB
  - Efficiency = 41%
- Typical CW performance, 470 MHz, 28 V
  - Output power at P-1dB = 175 W
  - Efficiency = 62%
- Integrated ESD protection: Human Body Model, Class 1 (minimum)
- Excellent thermal stability
- Low HCI drift
- Capable of handling 10:1 VSWR @ 28 V, 150 W (CW) output power

### RF Characteristics

**Single-carrier CDMA IS-95 Measurements** (not subject to production test—verified by design/characterization in Infineon test fixture)

$V_{DD} = 28\text{ V}$ ,  $I_{DQ} = 900\text{ mA}$ ,  $P_{OUT} = 60\text{ W}$  average,  $f = 470\text{ MHz}$

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	$G_{ps}$	—	21	—	dB
Drain Efficiency	$\eta_D$	—	41	—	%
Adjacent Channel Power Ratio	ACPR	—	-33	—	dB

All published data at  $T_{CASE} = 25^\circ\text{C}$  unless otherwise indicated

**ESD:** Electrostatic discharge sensitive device—observe handling precautions!

## RF Characteristics (cont.)

### Two-tone Measurements (tested in Infineon test fixture)

$V_{DD} = 28\text{ V}$ ,  $I_{DQ} = 900\text{ mA}$ ,  $P_{OUT} = 150\text{ W PEP}$ ,  $f = 470\text{ MHz}$ , tone spacing = 1 MHz

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	$G_{ps}$	20.0	21.0	—	dB
Drain Efficiency	$\eta_D$	45.0	46.5	—	%
Intermodulation Distortion	IMD	—	-29	-28	dBc

## DC Characteristics

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}$ , $I_{DS} = 10\text{ }\mu\text{A}$	$V_{(BR)DSS}$	65	—	—	V
Drain Leakage Current	$V_{DS} = 28\text{ V}$ , $V_{GS} = 0\text{ V}$	$I_{DSS}$	—	—	1.0	$\mu\text{A}$
On-State Resistance	$V_{GS} = 10\text{ V}$ , $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.07	—	$\Omega$
Operating Gate Voltage	$V_{DS} = 28\text{ V}$ , $I_{DQ} = 900\text{ mA}$	$V_{GS}$	2	2.48	3	V
Gate Leakage Current	$V_{GS} = 10\text{ V}$ , $V_{DS} = 0\text{ V}$	$I_{GSS}$	—	—	1.0	$\mu\text{A}$





## Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$V_{DSS}$	65	V
Gate-Source Voltage	$V_{GS}$	-0.5 to +12	V
Junction Temperature	$T_J$	200	$^{\circ}\text{C}$
Total Device Dissipation	$P_D$	625	W
Above 25 $^{\circ}\text{C}$ derate by		3.57	W/ $^{\circ}\text{C}$
Storage Temperature Range	$T_{STG}$	-40 to +150	$^{\circ}\text{C}$
Thermal Resistance ( $T_{CASE} = 70^{\circ}\text{C}$ , 150 W CW, soldered)	$R_{\theta JC}$	0.28	$^{\circ}\text{C/W}$





## Ordering Information

Type and Version	Package Outline	Package Description	Shipping	Marking
PTFA041501GL V1	PG-63248-2	Thermally-enhanced slotted flange, single-ended	Tray	PTFA041501GL
PTFA041501HL V1	PG-64248-2	Thermally-enhanced slotted flange, single-ended	Tray	PTFA041501HL


**Typical Performance** (data taken in a production )

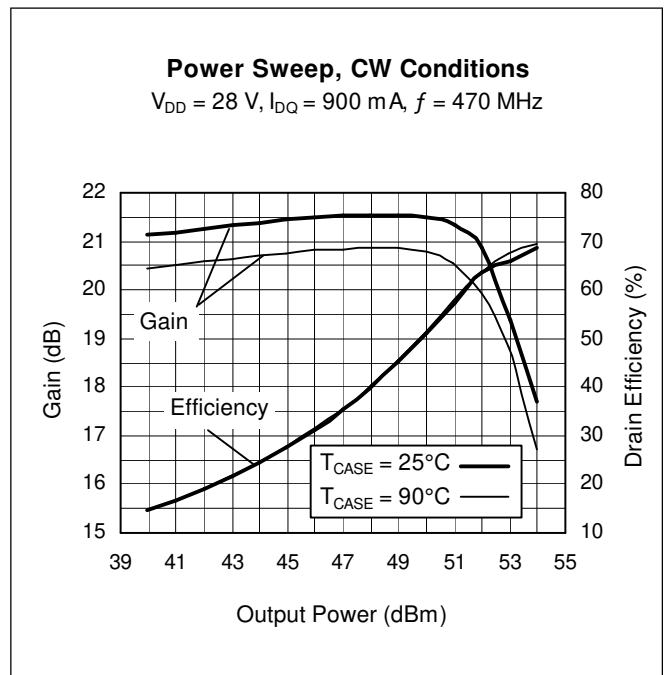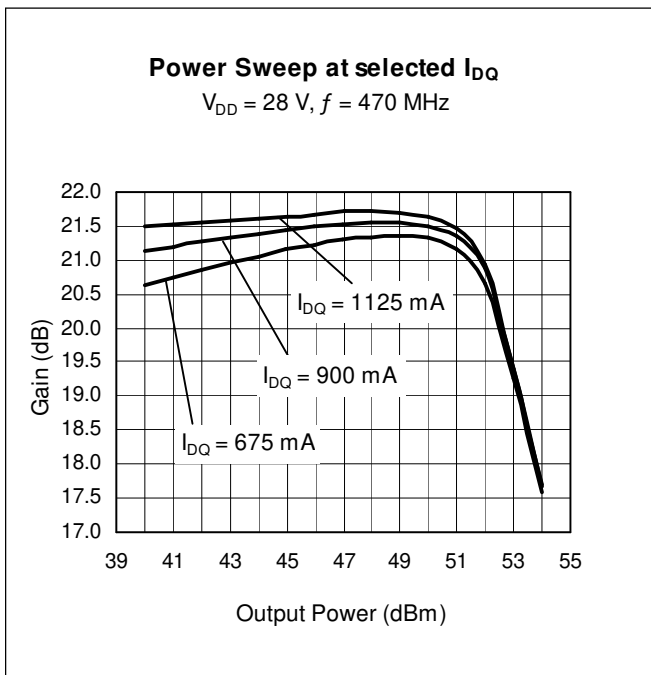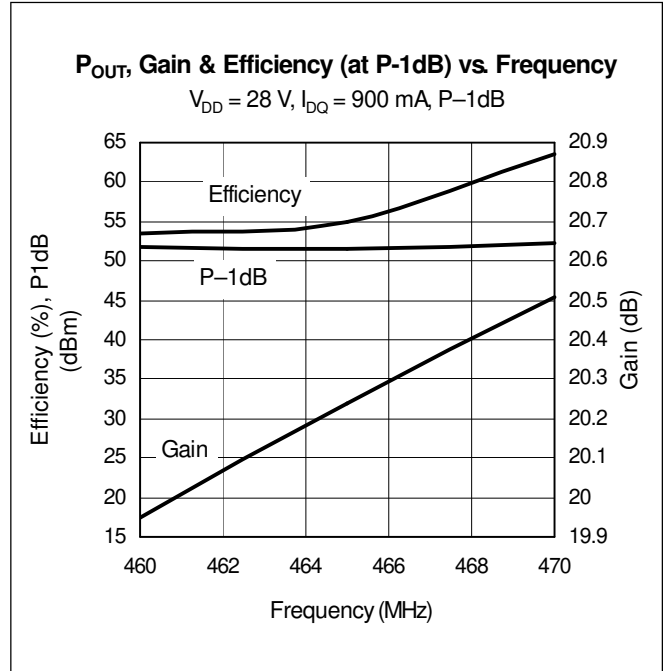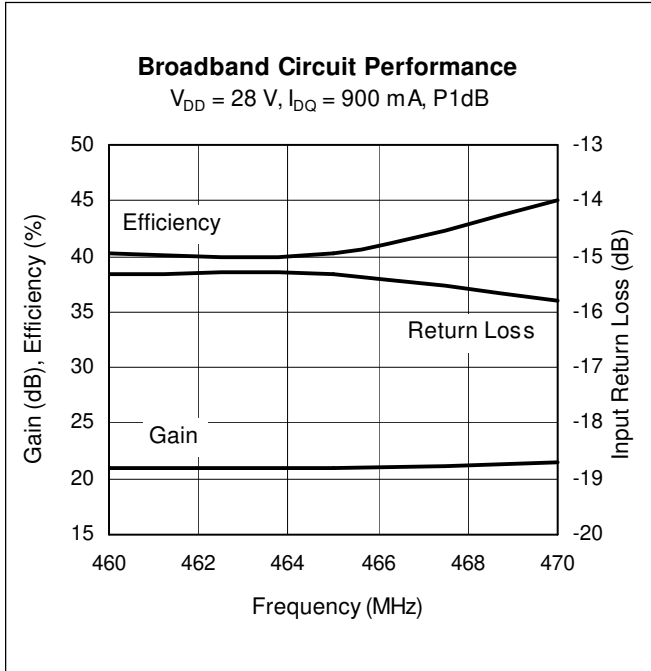


Typical Performance (cont.)

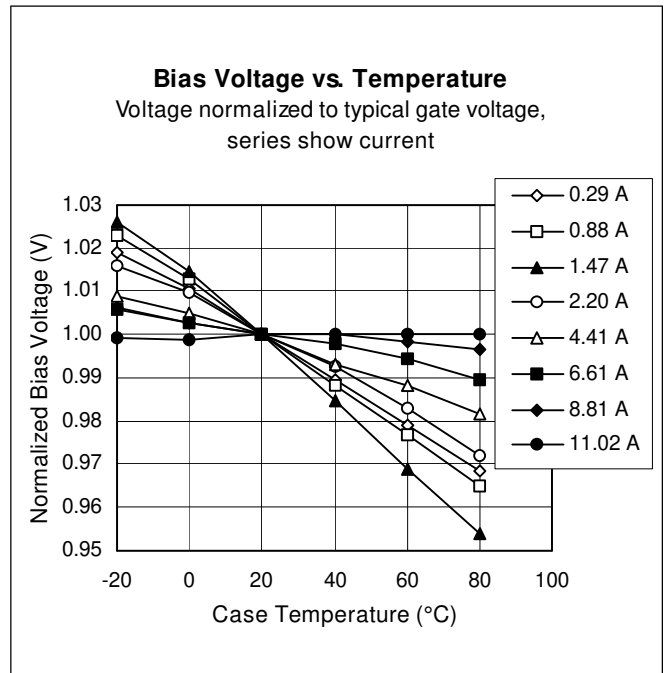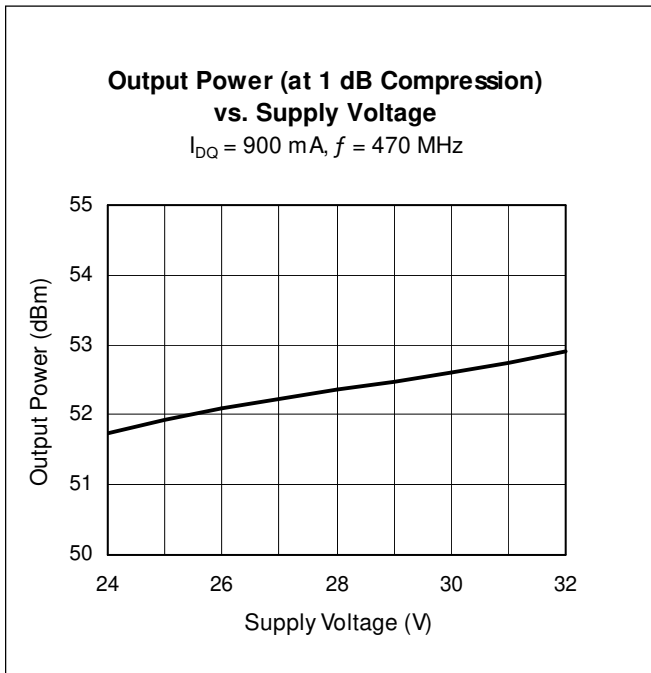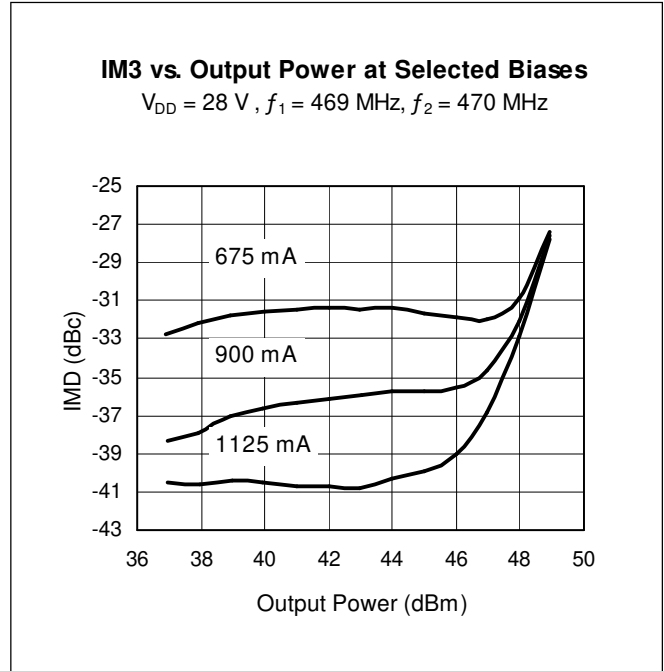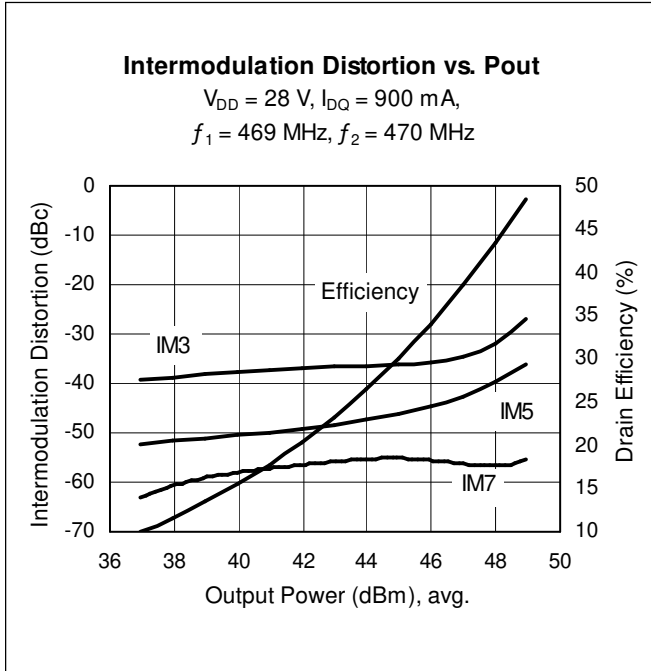

### Broadband Circuit Impedance

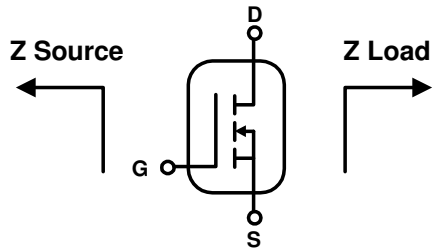


Frequency MHz	Z Source $\Omega$		Z Load $\Omega$	
	R	jX	R	jX
450	0.88	-3.20	1.33	0.22
455	0.84	-3.20	1.35	0.31
460	0.84	-3.10	1.40	0.38
465	0.84	-3.00	1.41	0.47
470	0.83	-2.90	1.44	0.57

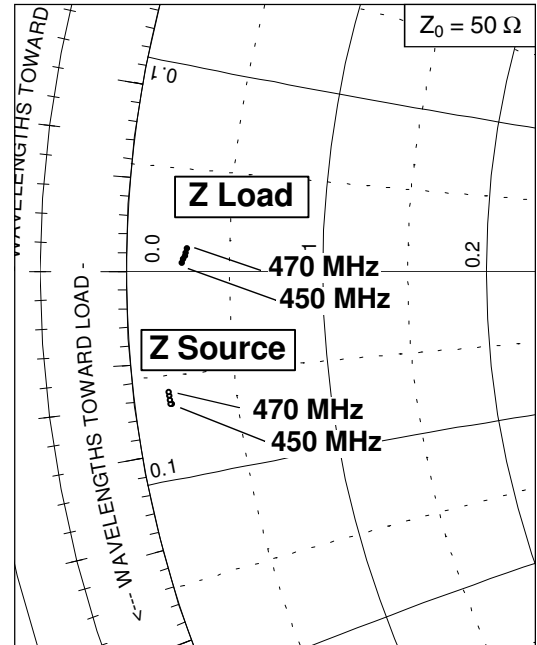

See next page for circuit information

### Reference Circuit

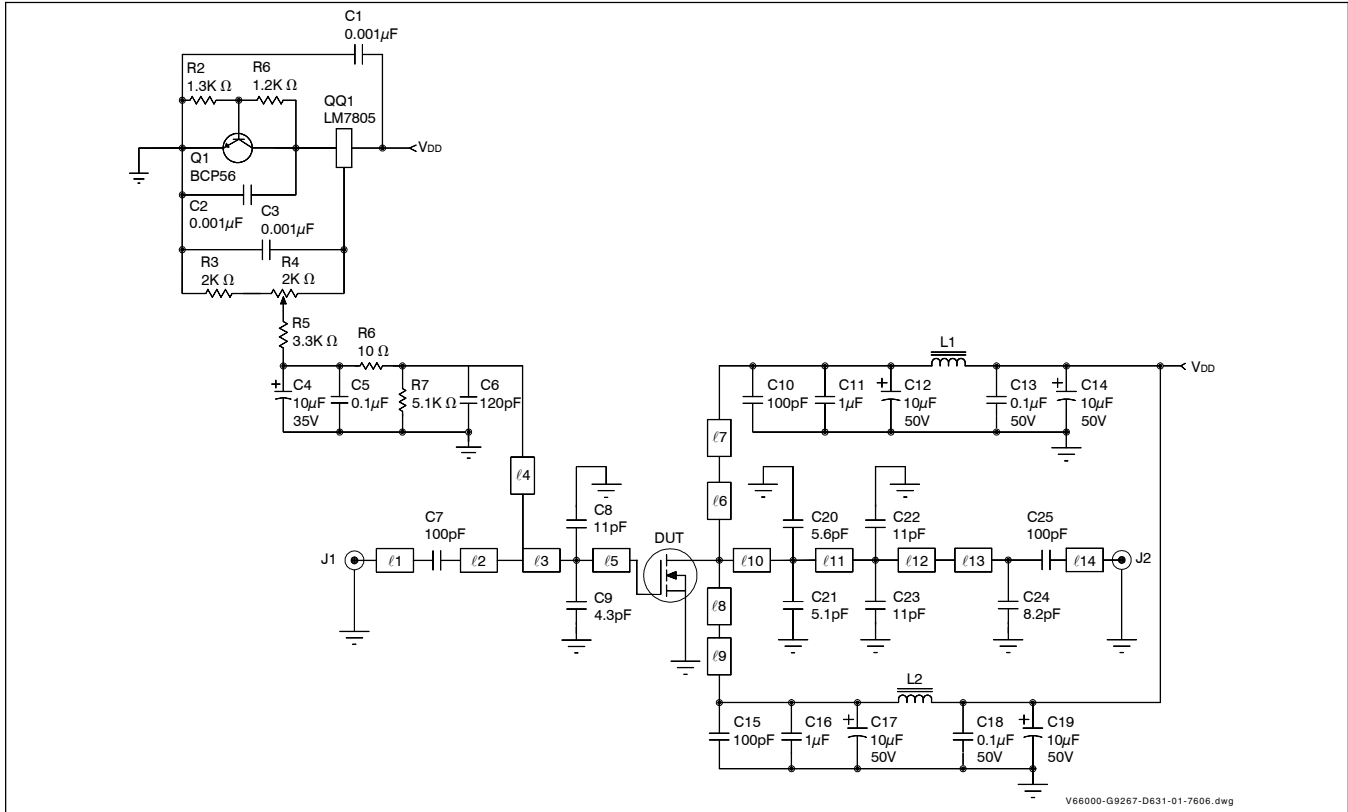


Reference circuit schematic for  $f = 460 \text{ MHz}$

### Circuit Assembly Information

DUT	PTFA041501GL or PTFA041501HL	LDMOS Transistor	
PCB	0.76 mm [.030"] thick, $\epsilon_r = 9.2$	Rogers TMM10	2 oz. copper

Microstrip	Electrical Characteristics at 460 MHz	Dimensions L x W (mm)	Dimensions L x W (in.)
$\ell 1$	$0.016 \lambda$ , 50.69 $\Omega$	4.32 x 0.71	0.170 x 0.028
$\ell 2$	$0.058 \lambda$ , 24.34 $\Omega$	14.22 x 2.54	0.560 x 0.100
$\ell 3$	$0.097 \lambda$ , 4.85 $\Omega$	21.59 x 17.78	0.850 x 0.700
$\ell 4$	$0.081 \lambda$ , 50.69 $\Omega$	21.59 x 0.71	0.850 x 0.280
$\ell 5$	$0.040 \lambda$ , 4.85 $\Omega$	8.89 x 17.78	0.350 x 0.700
$\ell 6$	$0.158 \lambda$ , 37.73 $\Omega$	40.64 x 1.27	1.600 x 0.050
$\ell 7$	$0.030 \lambda$ , 10.94 $\Omega$	5.59 x 7.11	0.220 x 0.280
$\ell 8$	$0.158 \lambda$ , 37.73 $\Omega$	40.64 x 1.27	1.600 x 0.050
$\ell 9$	$0.030 \lambda$ , 10.94 $\Omega$	5.59 x 7.11	0.220 x 0.280
$\ell 10$	$0.025 \lambda$ , 5.58 $\Omega$	5.59 x 15.24	0.220 x 0.600
$\ell 11$	$0.105 \lambda$ , 5.58 $\Omega$	23.62 x 15.24	0.930 x 0.600
$\ell 12$	$0.006 \lambda$ , 5.58 $\Omega$	1.27 x 15.24	0.050 x 0.600
$\ell 13$	$0.104 \lambda$ , 21.37 $\Omega$	25.4 x 3.05	1.000 x 0.120
$\ell 14$	$0.014 \lambda$ , 50.69 $\Omega$	3.81 x 0.71	0.150 x 0.028

Reference Circuit (cont.)

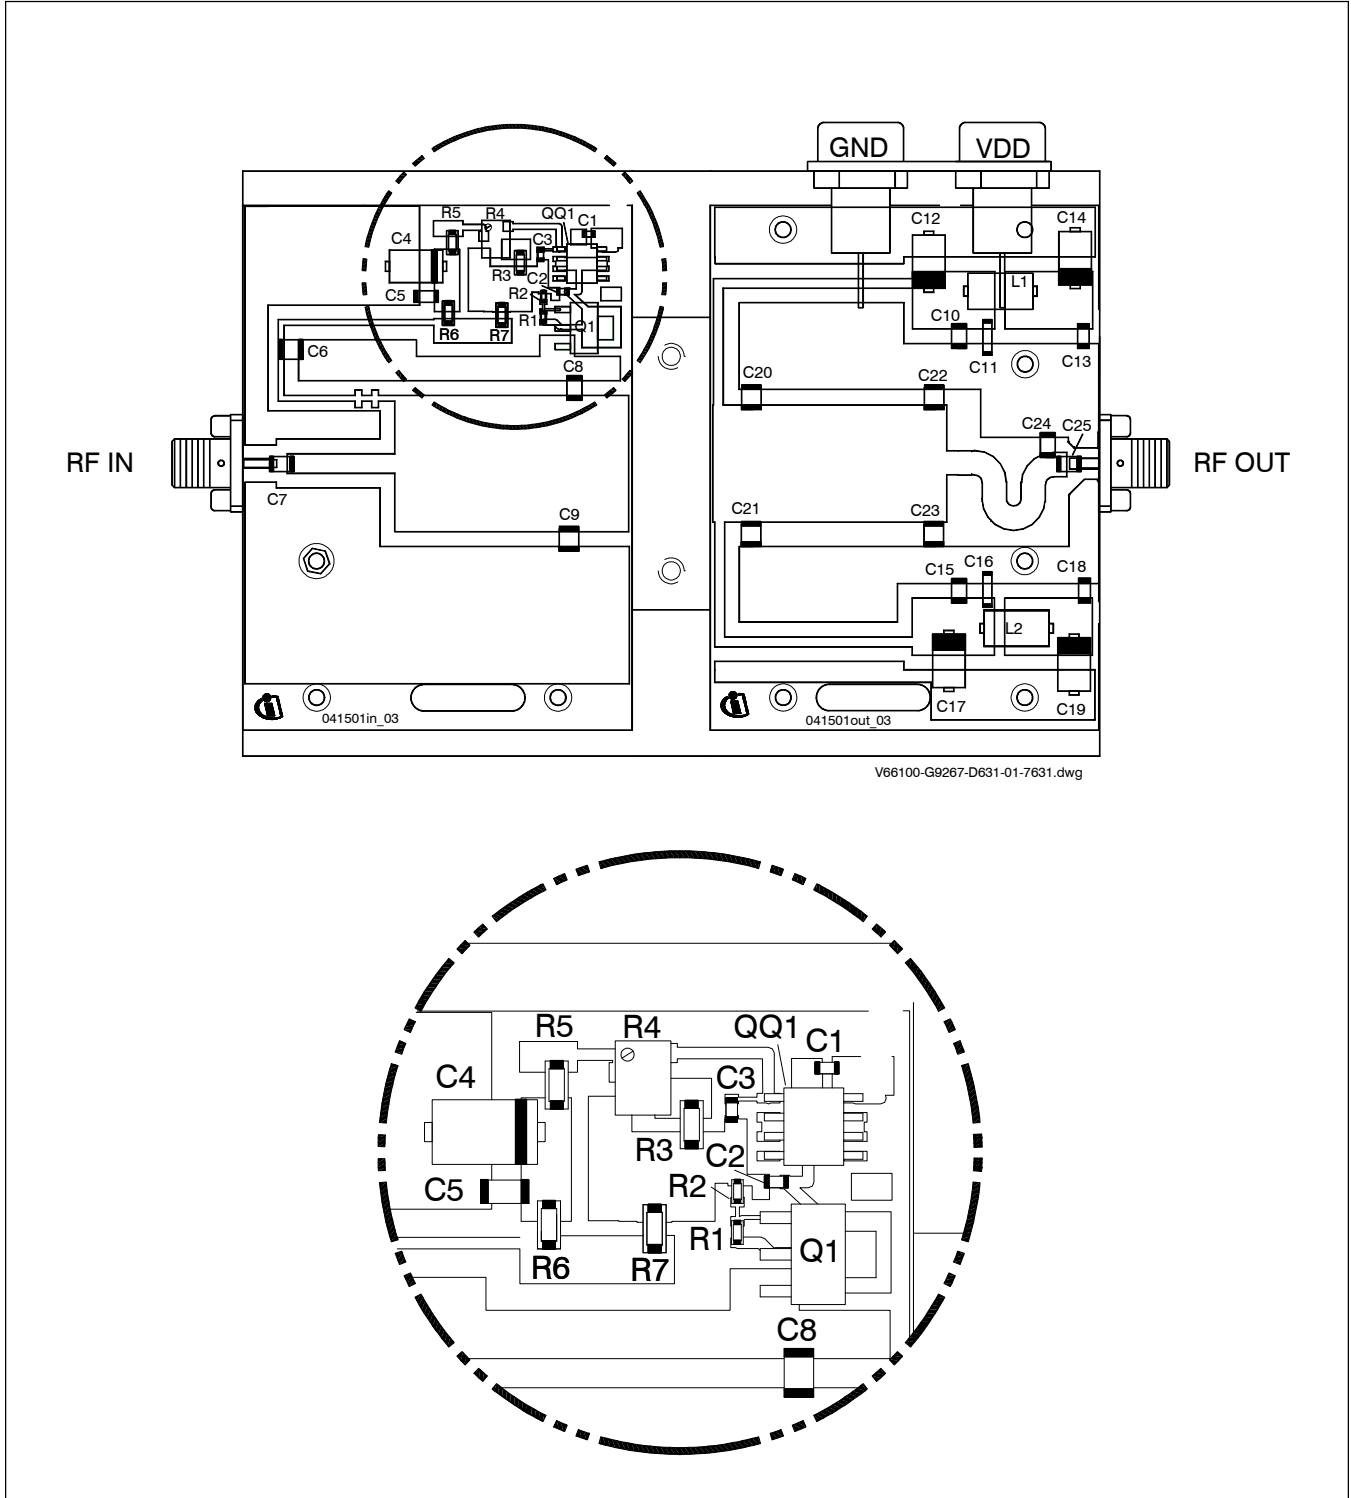


Reference circuit assembly diagram (not to scale). Gerber files for this circuit available on request.



**Reference Circuit** (cont.)


Component	Description	Suggested Manufacturer	P/N or Comment
C1, C2, C3	Capacitor, 0.001 $\mu$ F	Digi-Key	PCC1772CT-ND
C4	Tantalum capacitor, 10 $\mu$ F, 35 V	Digi-Key	PCS6106TR-ND
C5, C13, C18	Capacitor, 0.1 $\mu$ F	Digi-Key	P4525-ND
C6	Ceramic capacitor, 120 pF	ATC	100B 121
C7, C10, C15, C25	Ceramic capacitor, 100 pF	ATC	100B 101
C8, C22, C23	Ceramic capacitor, 11 pF	ATC	100B 110
C9	Ceramic capacitor, 4.3 pF	ATC	100B 4R3
C11, C16	Capacitor, 1.0 $\mu$ F	ATC	920C105
C12, C14, C17, C19	Capacitor, 10 $\mu$ F, 50 V	Garrett Electronics	TPS106K050R0400
C20	Ceramic capacitor, 5.6 pF	ATC	100B 5R6
C21	Ceramic capacitor, 5.1 pF	ATC	100B 5R1
C24	Ceramic capacitor, 8.2 pF	ATC	100B 8R2
L1, L2	Ferrite, 6 mm	Ferroxcube	53/3/4.6-452
Q1	Transistor	Infineon Technologies	BCP56
QQ1	Voltage regulator	National Semiconductor	LM7805
R1	Chip resistor, 1.2k ohms	Digi-Key	P1.2KGCT-ND
R2	Chip resistor, 1.3k ohms	Digi-Key	P1.3KGCT-ND
R3	Chip resistor, 2k ohms	Digi-Key	P2.0KECT-ND
R4	Potentiometer, 2k ohms	Digi-Key	3224W-202ETR-ND
R5	Chip resistor, 3.3k ohms	Digi-Key	P3.3KECT-ND
R6	Chip resistor, 10 ohms	Digi-Key	P10ECT-ND
R7	Chip resistor, 5.1k ohms	Digi-Key	P5.1KECT-ND

## Package Outline Specifications

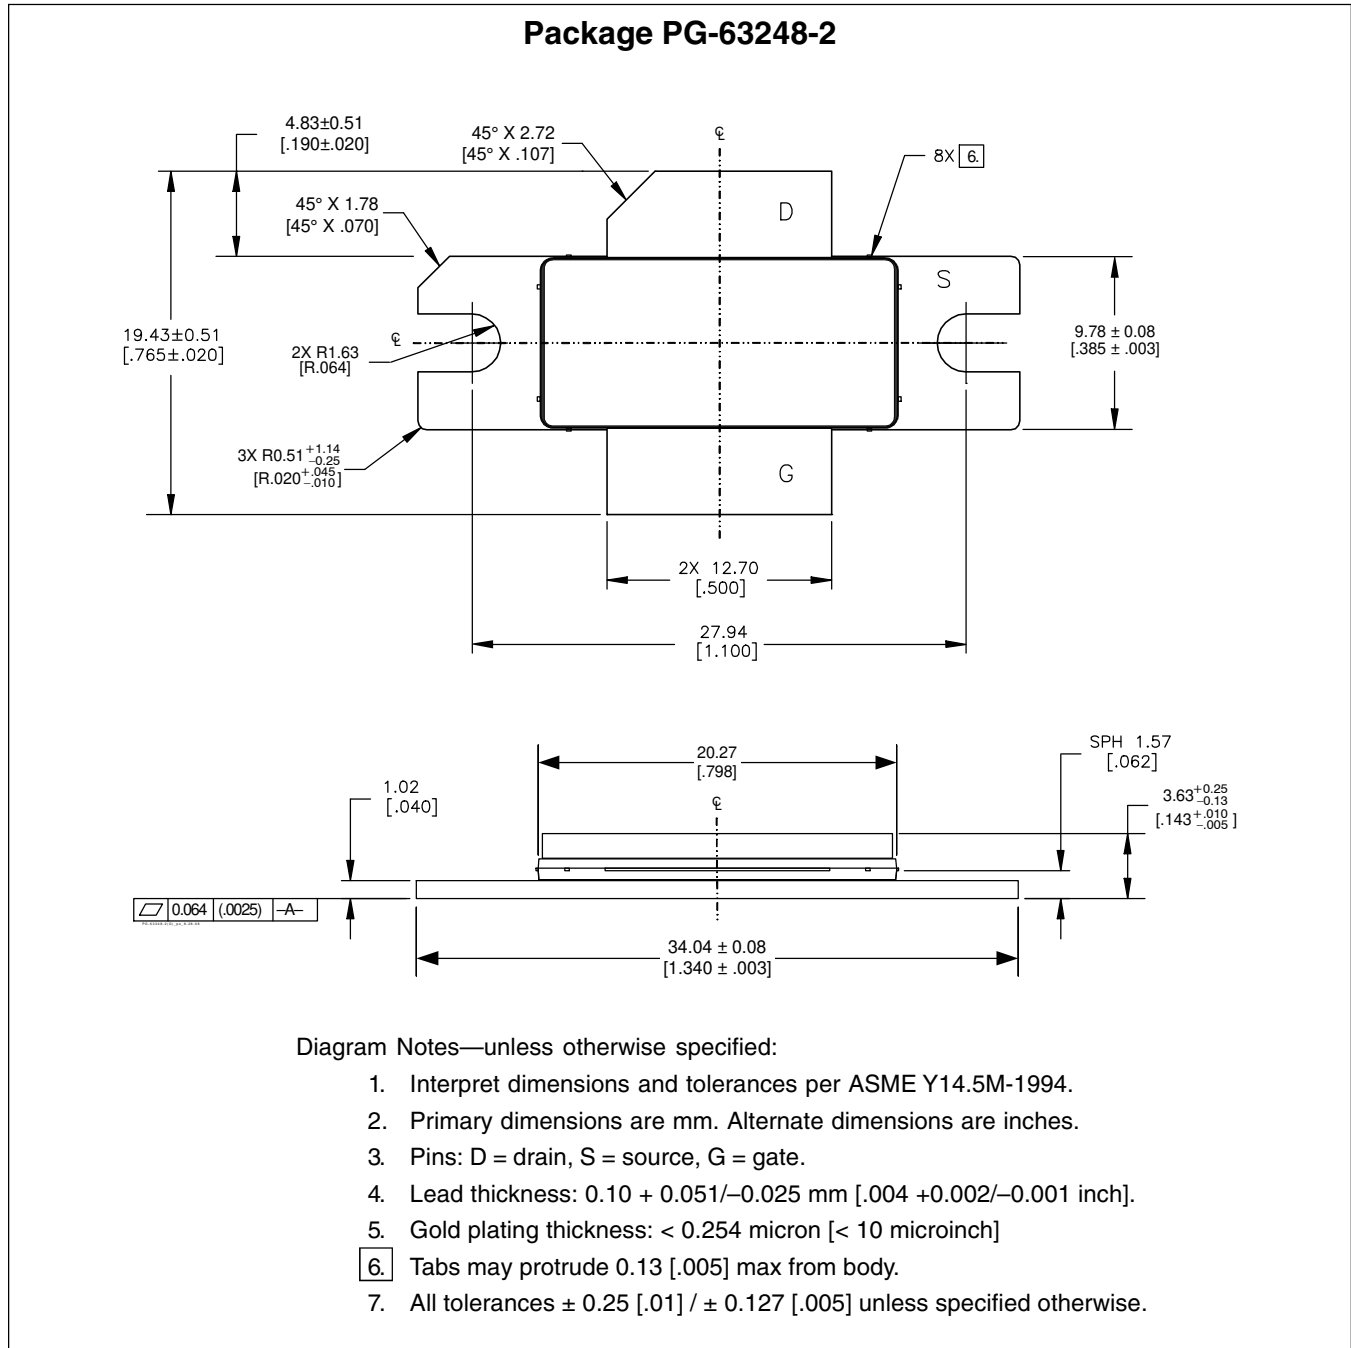

Find the latest and most complete information about products and packaging at the Infineon Internet page <http://www.infineon.com/rfpower>

Package Outline Specifications (cont.)

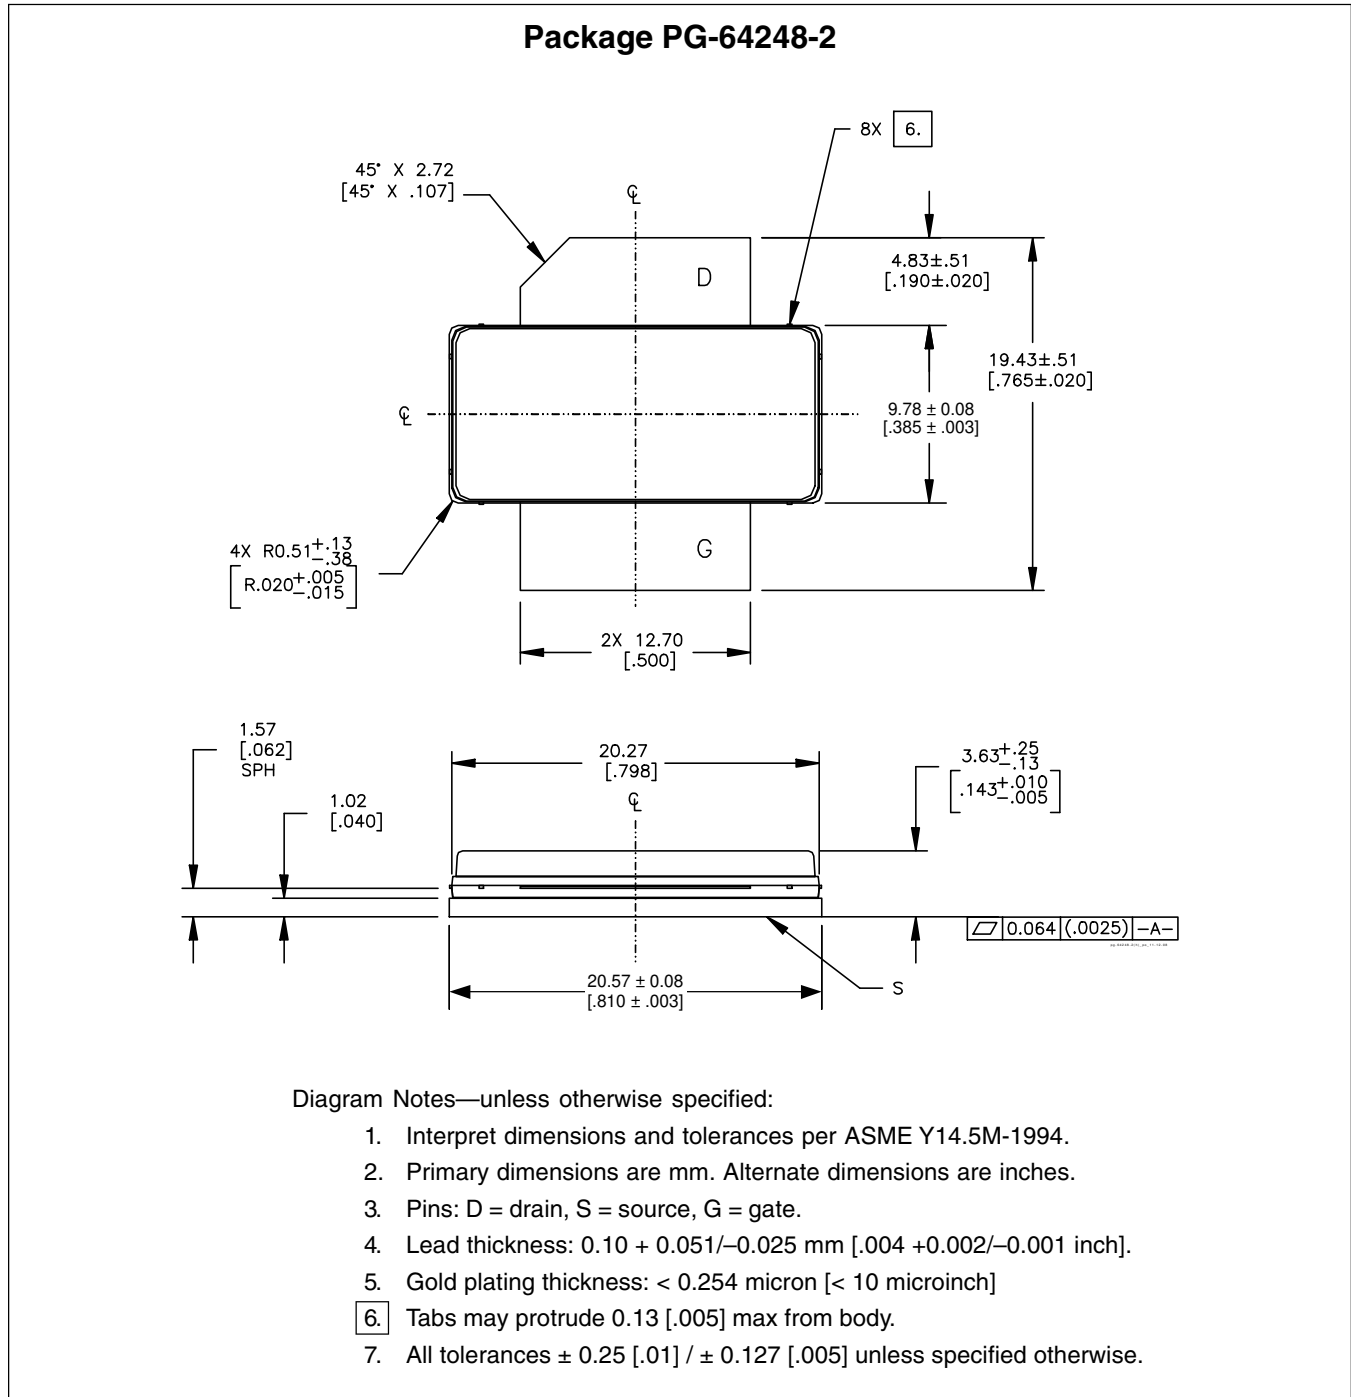

Find the latest and most complete information about products and packaging at the Infineon Internet page  
<http://www.infineon.com/rfpower>


Page	Subjects (major changes since last revision)
all	Remove Preliminary designation.
1 – 4	Finalize specifications.
5 – 7	Add circuit and impedance information.

**We Listen to Your Comments**

Any information within this document that you feel is wrong, unclear or missing at all? Your feedback will help us to continuously improve the quality of this document. Please send your proposal (including a reference to this document) to:

[highpowerRF@infineon.com](mailto:highpowerRF@infineon.com)

To request other information, contact us at:  
+1 877 465 3667 (1-877-GO-LDMOS) USA  
or +1 408 776 0600 International



**Edition 2008-11-21**

**Published by**

**Infineon Technologies AG**  
**81726 Munich, Germany**

**© 2008 Infineon Technologies AG**  
**All Rights Reserved.**

**Legal Disclaimer**

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

**Information**

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office ([www.infineon.com/rfpower](http://www.infineon.com/rfpower)).

**Warnings**

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.