



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# TAIYO YUDEN

## PRELIMINARY SPECIFICATIONS

LCD Backlight Driver

Model

# SIPF200A-RH

RoHS  
COMPLIANT


12 Volt Input

Industrial Grade Single Tube CCFT Inverter

Brightness Control

### Physical Specifications

Dimensions:	22.7mm x 96.5mm x 7.3mm (0.894" x 3.79" x 0.287")
Weight:	20g (0.704 oz.)
Operating Temp:	0 to 55°C, convection cooling
Relative Humidity:	20% to 90%, non-condensing
Storage:	-20 to 85°C/5-95% RH non-condensing
Impact Resistance:	50G half wave per 2 msec
Vibration Resistance:	10-55-10 Hz/min @ 1.5mm

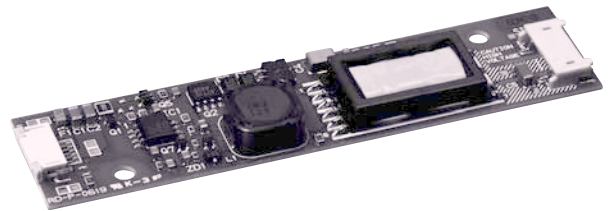

### Input Specifications\*

Item	Condition	Standard
Input Voltage Rated Tolerance	— Continuous Operation Starting Condition (Discharge Starting Voltage)	12.0 Vdc 8.0 Vdc - 20.0 Vdc 8.0 Vdc - 20.0 Vdc
Max. Input Current	$V_{IN} = 8.0$ Vdc Luminance @ Max.	0.75 A
Input Leak Current	$V_{IN} = 20.0$ Vdc Control terminal = H( $V_{IN}$ ) On/Off	12.0 $\mu$ A (Lamp Off)
Max. Rush Current	$V_{IN} = 20.0$ Vdc Luminance @ Max.	20.0 A <sub>zero-p</sub> /15 $\mu$ S Max.
Max. Input Power	$V_{IN} = 8.0$ Vdc Luminance @ Max.	5.1 W Typical
On/Off Control Terminal Input Current	Control Terminal L = 0.0 - 0.4 Vdc $V_{IN} = 20.0$ Vdc	$I_{LOW} = -2.0$ mA (Lamp Lighting)
	Control Terminal H = Open or $V_{IN}$	— (Lamp Off)

\*Above specifications occur @ 25  $\pm$  5°C.

### Output Specifications\*

Item	Condition	Standard		
		MIN	TYP	MAX
Non-Loaded Output Voltage (Vrms)	$V_{IN} = 8.0$ Vdc	1500	—	—
Tube Current (mArms)	Luminance @ Max. Luminance @ Min.	5.5 2.5	6.0	6.5
Max. Power Output (W)	$V_{IN} = 12.0$ Vdc/Luminance @ Max.	—	—	4.0
Ignition Frequency (kHz)	Luminance @ Max.	—	50	—
DC/DC Converter Frequency (kHz)	Luminance @ Max.	—	220	—


\*Above specifications occur @ 25  $\pm$  5°C &  $V_{IN} = 8.0 - 20.0$  Vdc.

Model

# SIPF200A-RH

## Luminance Variance

Item	Condition	Applied Voltage	Output Current
Luminance @ Max.	Btwn. pin 4 & pin 5	0.0 Vdc	6.0 mA
Luminance @ Min.	Btwn. pin 4 & pin 5	4.5 Vdc	2.5 mA

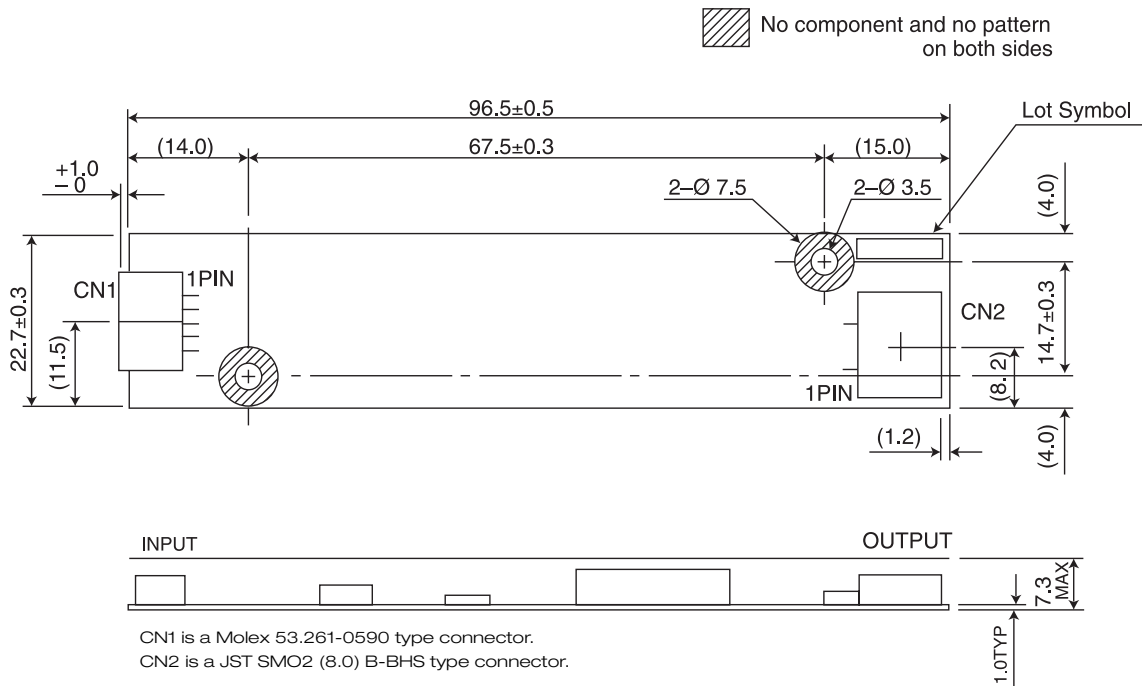

© Copyright 2007 TAIYO YUDEN (U.S.A.), INC. Specifications subject to change without notice.

## TAIYO YUDEN

TAIYO YUDEN (U.S.A.), INC.  
440 Stevens Avenue, Suite 300 Solana Beach, CA 92075  
(858) 350-6800 / Fax: (858) 350-6854  
**(800) 263-4532** [www.t-yuden.com](http://www.t-yuden.com) [inverters@t-yuden.com](mailto:inverters@t-yuden.com)




FM 32227

Model

# SIPF200A-RH


Tech Notes

## Connection Diagram

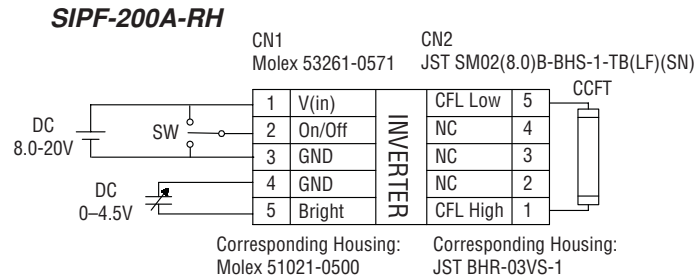

## Output Current Optimization Method

Maximum output current can be adjusted by applying bias voltage between brightness control pins as shown below.

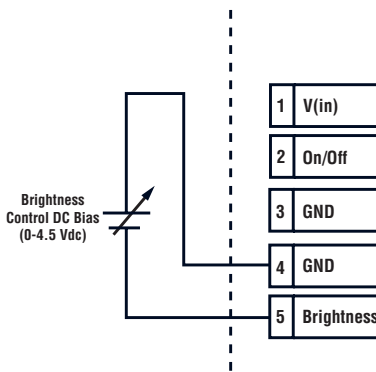


	DC Bias Voltage	Output Current
<b>Luminance Max.</b>	0 Vdc	6.0 mA
<b>Luminance Min.</b>	4.5 Vdc	2.5 mA

## On/Off Control

The on/off control is achieved by using the on/off pin on the input side of SIPF200A-RH. The circuit for the remote on/off circuitry consists of an active low TTL switch. When the circuit is open, the IC Vcc is cut off. When the circuit is closed, IC Vcc is activated. A mechanical switch or a TTL/CMOS gate needs to be placed between the remote on/off pin and ground creating a condition where the circuit is closed to activate the inverter. Either one of the following will be required for the inverter to operate:

One recommended use of logic switch for remote on/off is shown in the diagram below. Electrical specification for on/off terminal is Low 0 to 0.4V, -0.4 mA or higher when switch is closed.

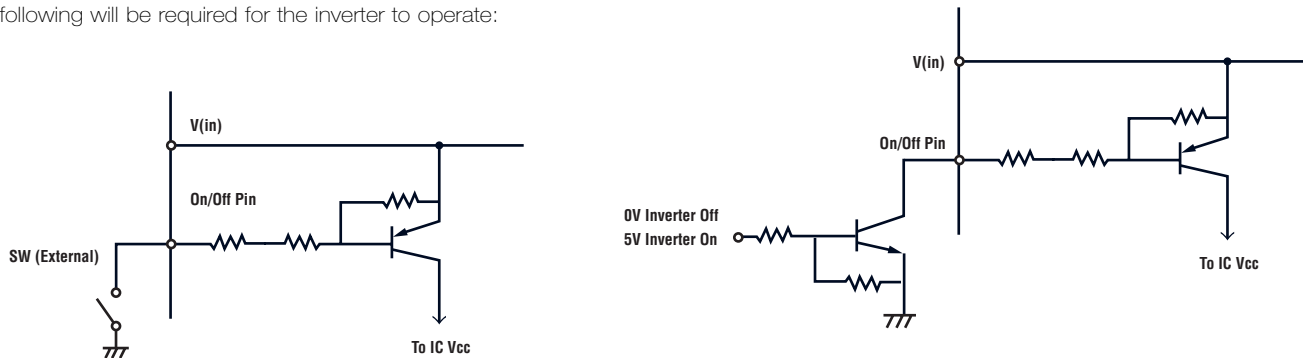

1. Tie on/off pin to ground.
2. Add mechanical switch between on/off pin and ground, close switch.
3. Add TTL/CMOS switch between on/off and ground. Circuit must be closed for unit to operate (as shown above right).