



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Device connector, rear mounting - PRC 3-FT25-MC - 1409218

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



PRC contact carrier without contacts, black, 3-pos., 630 V/35 A, for 1.5 mm² ... 6 mm² crimp contacts



Key Commercial Data

Packing unit	1 pc
Minimum order quantity	50 pc
Weight per Piece (excluding packing)	15.2 g
Custom tariff number	85366990
Country of origin	Germany

Technical data

General data

Number of positions	3
Protection class	III
Color	black
Locking type	Snap-in locking
Insertion/withdrawal cycles	50
Pull-out-force	175 N ± 25 N
Insertion force	30 N ± 10 N

Connection data

Rated current	35 A (with 6 mm² conductor cross section)
Rated voltage (III/2)	690 V
Conductor cross section flexible min.	2.5 mm²
Conductor cross section flexible max.	6 mm²
Conductor cross section solid min.	2.5 mm²
Conductor cross section solid max.	6 mm²

Device connector, rear mounting - PRC 3-FT25-MC - 1409218

Technical data

Connection data

Stripping length	11 mm
Torque	2.5 Nm \pm 0.1 Nm (Tightening torque nut)
Wrench size, union nut	32.00 mm
Type of contact	Male connector
Stripping length of the sheath	12 mm

Material data

Contact material	Cu
Contact surface material	silver-plated
Contact carrier material	PPE
Material of grip body	PPE
Inflammability class according to UL 94	V0

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27260701
eCl@ss 6.0	27279220
eCl@ss 7.0	27440103
eCl@ss 8.0	27440103

ETIM

ETIM 4.0	EC002061
ETIM 5.0	EC002061

UNSPSC

UNSPSC 6.01	30211923
UNSPSC 7.0901	39121522
UNSPSC 11	39121522
UNSPSC 12.01	39121522
UNSPSC 13.2	39121522

Approvals

Approvals

Device connector, rear mounting - PRC 3-FT25-MC - 1409218

Approvals


Approvals


UL Listed / cUL Listed / cULus Listed


Ex Approvals

Approvals submitted

Approval details

UL Listed 	
mm²/AWG/kcmil	14-10
Nominal current I _N	35 A
Nominal voltage U _N	600 V


cUL Listed 	
mm²/AWG/kcmil	14-10
Nominal current I _N	35 A
Nominal voltage U _N	600 V

cULus Listed 	
--	--


Drawings

Device connector, rear mounting - PRC 3-FT25-MC - 1409218

Dimensional drawing

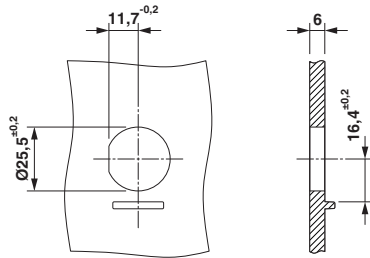


Dimensional drawing




Housing cutout

Dimensional drawing

Dimensional drawing



Schematic diagram



Connector pin assignment

Dimensional drawing