

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



### Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







# CEL California Eastern Laboratories

**Evaluation Board Document** 

### $\mu$ PG2159T6R-EVAL-A

### **Evaluation Board**

- o Description
- o Insertion Loss of Through Board
- o Performance Data Plots
- o Assembly Drawing

#### **Description:**

The uPG2159T6R-EVAL-A evaluation board provides a quick and convenient means of evaluating the performance of the NEC uPG2159T6R switch. In addition to the device, the board provides DC block capacitors, power supply bypass capacitors, and RF and DC connectors.

A DC block capacitor is required at all RF ports. On this board, two parallel capacitors of 22pF are used for this purpose. This configuration minimizes the mismatch effect associated with the serial capacitors over a wide frequency range. In a real application where the operation frequency range is relatively narrow, one DC block capacitor usually is sufficient. The user should select the appropriate capacitor value according to the operation frequencies and the type of capacitor selected. Generally the performance of the switch circuit is not sensitive, to a certain extent, to the value of DC block capacitors.

A 1000pF capacitor is used for DC bypass on all control lines. For high speed applications the user may choose smaller capacitance or no capacitor at all.

#### DC supply connectors:

P1 is control voltage  $V_{cont1}$ , P2 is  $V_{cont2}$  and pins P3 and P4 are the ground.

 $V_{cont1}$  and  $V_{cont2}$  should be connected to separate power supplies to provide the required control logic.

#### RF connectors:

As indicated on the board, J1 is connected to the OUTPUT1 port, J2 is connected to the OUTPUT2 port and J3 is connected to the INPUT port.

#### Information on Board Material:

The board material is 20 mil thick Duroid 6002. Its dielectric constant is 2.94.

#### Switch Logic Table:

The following table lists the logic table for switch states.

Vcont1	Vcont2	INPUT – OUTPUT1	INPUT – OUTPUT2
Н	L	ON	OFF
L	Н	OFF	ON

#### **Insertion Loss of Through Board:**


The insertion loss plot shown below is from direct measurement on an evaluation board. It is necessary to take the loss through the connectors and PCB trace into account in assessing the insertion loss through the switch alone. To this end a through board was characterized to determine the board/connector loss. The table below lists the board loss at different frequencies.

INPUT FREQUENCY (GHz)	BOARD LOSS (dB)	
0.5	0.053	
1.0	0.073	
1.5	0.107	
2.0	0.120	
2.5	0.133	
3.0	0.154	


#### **Performance Plots:**

The following plots show typical data on insertion loss, isolation and return losses for the condition of INPUT to OUTPUT1 path being ON. The data for condition of INPUT to OUTPUT2 being ON is similar.

### Insertion Loss and Isolation Plots

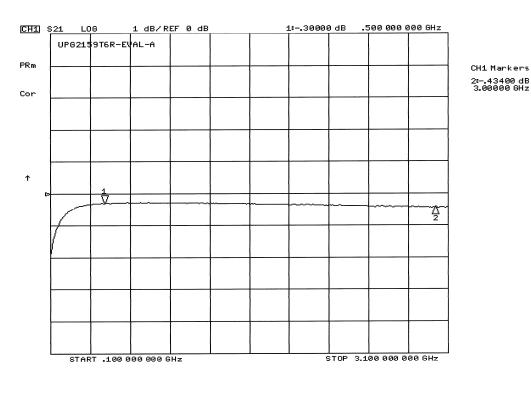

CH1 Markers

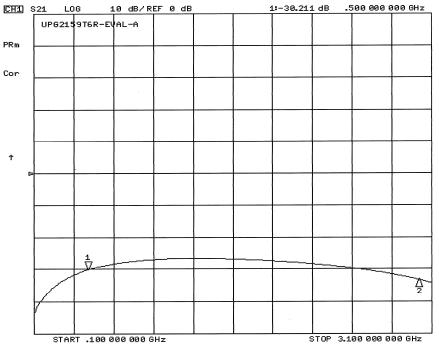

## Input and Output Return Loss Plots

