



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Sealing frame - CES-B16-8XSRC-BK - 1411073

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sealing frame with screw locking, size: B16, with 8 pre-mounted coned sleeves for a 2 mm ... 11 mm conductor diameter

Product Features



Key commercial data

Packing unit	1 pc
Custom tariff number	39269097
Country of origin	Poland

Technical data

Dimensions

External cable diameter	8x 2 mm ... 11 mm
Length	120 mm
Width	58.5 mm
Height	20 mm

Ambient conditions

Degree of protection	IP54 (DIN IEC 60529)
Ambient temperature (operation)	-40 °C ... 120 °C (static)

General

Frame type	Sealing frame with coned sleeves
Material	Polyamide (Frame)
	NBR (Coned sleeves)
Color	black
Torque	2 Nm ... 4 Nm (Locking screw)
Installation instructions	M4 locking screw with 3 mm hex socket head, torque 2 ... 4 Nm

Sealing frame - CES-B16-8XSRC-BK - 1411073

Technical data

General

	Leak-tightness is guaranteed with underwall and perpendicular mounting; the CES-B24-WRG-BK flat gasket (supplied as standard) should be inserted between the wall and the sealing frame in the case of wall mounting.
--	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Classifications

eCl@ss


eCl@ss 5.1	23110102
eCl@ss 6.0	23110102

ETIM

ETIM 4.0	EC000886
ETIM 5.0	EC000886


Drawings

Dimensional drawing

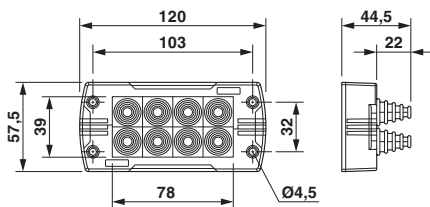

Dimensional drawing

Dimensional drawing



Panel cutout