



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Connector set - HC-EVO-B06PT-BWSC-HL-M20ELC-AL - 1411487

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



EVO connector set, B6 series, metal housing, consisting of: sleeve housing 1411448, panel mounting base 1411319, EVO screw connection 1411439, pin contact insert 1407728, socket contact insert 1407727



### Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	440.0 g
Custom tariff number	85366990
Country of origin	Germany

### Technical data

#### General

Number of positions	6+PE
Type	B6
Connection method	Push-in connection
Cable exit	straight
Degree of protection for housing	IP66
	IP69K (ISO 20653:2013-02)
	4
	4X
	12
Connection method	Push-in connection
Rated voltage (III/3)	500 V
Rated surge voltage	6 kV
Rated current	16 A

## Connector set - HC-EVO-B06PT-BWSC-HL-M20ELC-AL - 1411487

### Technical data

#### Standards and Regulations

Flammability rating according to UL 94	V0
--	----

### Articles in set

Contact insert - HC-B 06-I-PT-F - 1407727



HEAVYCON socket insert, B6 series, 6 + PE-pos., push-in connection

Contact insert - HC-B 06-I-PT-M - 1407728



HEAVYCON pin insert, B6 series, 6 + PE-pos., push-in connection

Housing - HC-EVO-B06-HLFS-EL-AL - 1411448



HEAVYCON EVO sleeve housing, EMC version, without powder coating, with bayonet flange for EVO screw connection, B6, for single locking latch, height: 64 mm, without EVO screw connection.

Housing - HC-STA-B06-BWSC-ELC-AL - 1411319



HEAVYCON B6 panel mounting base, with single locking latch, with plastic protective cover, with flat gasket, salt-water-resistant aluminum, conductive profile gasket.

# Connector set - HC-EVO-B06PT-BWSC-HL-M20ELC-AL - 1411487

## Articles in set

Cable gland - HC-B-G-M20-EC-AL - 1411439



EVO EMC cable gland with bayonet locking, B series, size M20, cable diameter: 7 - 13 mm

---

## Classifications

### eCl@ss

eCl@ss 5.1	27260701
eCl@ss 6.0	27260705
eCl@ss 8.0	27440101

### ETIM

ETIM 4.0	EC002641
ETIM 5.0	EC002636

## Approvals

### Approvals

---

### Approvals

### EAC

---

### Ex Approvals

---

### Approvals submitted

---


## Approval details

EAC
-----

## Drawings


# Connector set - HC-EVO-B06PT-BWSC-HL-M20ELC-AL - 1411487

Schematic diagram




Pin assignment, connection side, pin

Schematic diagram




Pin assignment, connection side, socket

Diagram

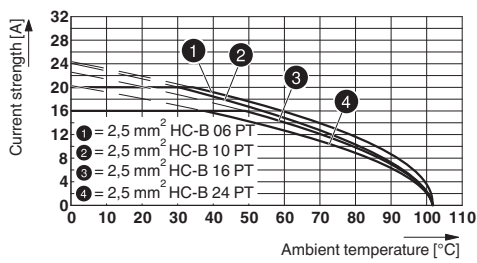


Derating diagram

Dimensional drawing

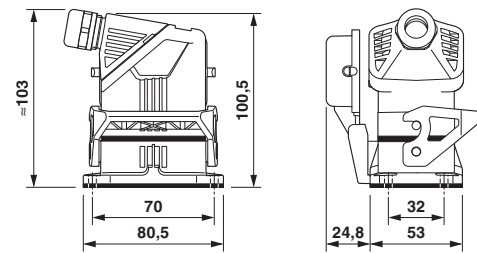

Dimensional drawing

Dimensional drawing



Panel cutout