



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



DIN rail adapter - FOC-PP-SB-ST:6 - 1411903

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



DIN rail module, empty, for 12 x ST simplex

DIN rail module, 12 x ST simplex, without pigtails and splice comb

Product Description

DIN rail module, for 12 x ST simplex, front plate fitted with 6 x multimode hybrid coupling (SC duplex to ST), without pigtails and splice holder. Housing (2-piece) for fixing on the DIN rail, integrated rack for accommodating excess lengths of fiber (protection), cable entry possible by means of M20 x 1.5 screw connection on top/bottom (screw connection available as an option). Ready for DIN rail mounting by means of adapter on the back, ready for equipotential bonding.

Supplied as standard: DIN rail housing, empty (2-piece), front plate with port marking and integrated splice comb (mounted), front plate fitted with 6 x ST/SC duplex coupling (hybrid) metal.

Product Features

- Cable entry possible by means of M20 x 1.5 screw connection on top and bottom
- Suitable for industrial applications
- Compact dimensions despite large splice comb
- Snap-in adapter for easy DIN rail mounting
- Ready for equipotential bonding



Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	840.0 g
Custom tariff number	85389099
Country of origin	Germany

Technical data

Mechanical characteristics

Number of slots	12
Connection profile	ST / BFOC (ST®) connectors

DIN rail adapter - FOC-PP-SB-ST:6 - 1411903

Technical data

Mechanical characteristics

Fiber type	GOF
Fiber	50/125 µm OM2
Ferrule diameter	2.50 mm
Insertion/withdrawal cycles	> 500
Type of contact	Fiber optics connectors
Max. cable diameter	M20 x 1.5 cable gland
External cable diameter	depending on optional cable gland
Type of cable	For all common cable types
Color	light grey RAL 7035
Mounting type	DIN rail mounting

Ambient conditions

Ambient temperature (operation)	-25 °C ... 70 °C (according to IEC 61300-2)
Ambient temperature (storage/transport)	-25 °C ... 70 °C (according to IEC 61300-2)
Degree of protection	IP20

Material data

Flammability rating according to UL 94	V0
Housing material	Sheet steel
Housing surface material	Powder-coated, gray

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Classifications

eCl@ss

eCl@ss 5.1	27260701
eCl@ss 6.0	27260705
eCl@ss 8.0	19170105


ETIM

ETIM 4.0	EC000731
ETIM 5.0	EC000731

Drawings

DIN rail adapter - FOC-PP-SB-ST:6 - 1411903

Dimensional drawing

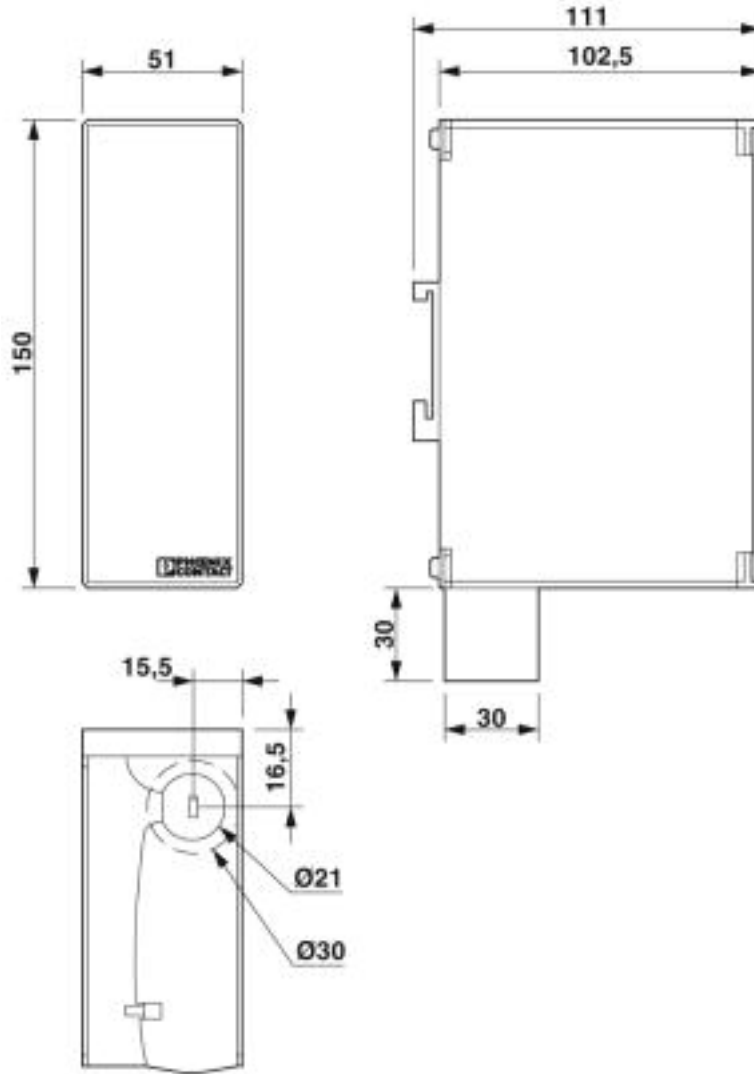

DIN rail module, 6 x ST/SC duplex (hybrid), without pigtailed