



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Network cable - VS-M12MS-PPC/ME-94B-LI/5,0 - 1412477

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Assembled Ethernet cable, shielded, 4-pair, AWG 26 stranded (7-wire), RAL 5021 (sea blue), M12 plug to RJ45 plug/IP67 push/pull metal housing, line, length 5 m



Ethernet

Key commercial data

| | |
|--------------------------------------|-----------|
| Packing unit | 1 1 |
| Weight per Piece (excluding packing) | 300.0 GRM |
| Custom tariff number | 85444210 |
| Country of origin | Germany |

Technical data

Mechanical characteristics

| | |
|-----------------------------|--------------------|
| Number of positions | 8 |
| Number of slots | 1 |
| Shielded | Yes |
| Insertion/withdrawal cycles | ≥ 100 |
| Cable diameter | 6.40 mm |
| Cable exit | Straight |
| Cable structure | 4x2xAWG26/7; S/FTP |
| Length of cable | 5 m |

Ambient conditions

| | |
|---------------------------------|--|
| Ambient temperature (operation) | -25 °C ... 60 °C (cable, fixed installation) |
| | -5 °C ... 60 °C (cable, flexible installation) |

Material data

| | |
|---|---------------------|
| Inflammability class according to UL 94 | HB |
| Outer sheath, material | PUR |
| External sheath, color | water blue RAL 5021 |

Network cable - VS-M12MS-PPC/ME-94B-LI/5,0 - 1412477

Technical data

Line characteristics

| | |
|---|--|
| Cable type | Ethernet |
| Cable structure | 4x2xAWG26/7; S/FTP |
| Conductor cross section | 4x 2x 0.14 mm ² |
| AWG signal line | 26 |
| Conductor structure signal line | 7x 0.16 mm |
| Core diameter including insulation | 1.04 mm |
| Thickness, insulation | 0.28 mm (signal line) 0.65 mm (Outer cable sheath) |
| External cable diameter | 6.4 mm ± 0.2 mm |
| Wire colors | white/blue-blue, white/orange-orange, white/green-green, white/brown-brown |
| External sheath, color | water blue RAL 5021 |
| Transmission medium | Copper |
| Insulation resistance | ≥ 500 MΩ*km (at 20 °C) |
| Conductor resistance | ≤ 290 Ω/km (at 20 °C) |
| Transmission characteristics (category) | CAT6 _A |
| Wave impedance | 100 Ω ± 5 Ω (At 100 MHz) |
| Signal runtime | 5.3 ns/m |
| Shield attenuation | ≥ 80 dB (at 30 ... 100 MHz) |
| Nominal voltage, cable | ≤ 100 V (at 20 °C) |
| Test voltage Core/Core | 700 V (50 Hz, 1 min.) |
| Test voltage Core/Shield | 700 V (50 Hz, 1 min.) |
| Twisted pairs | 2 cores to the pair |
| Type of pair shielding | Aluminum-lined polyester foil |
| Overall twist | 4 pairs |
| Shielding | Tinned copper braided shield |
| Optical shield covering | 70 % |
| Outer sheath, material | PUR |
| Material conductor insulation | PE |
| Conductor material | Bare Cu litz wires |
| Cable weight | 43 kg/km |
| Smallest bending radius, fixed installation | 25.6 mm |
| Smallest bending radius, movable installation | 51.2 mm |
| Tensile strength short-term/long-term | ≤ 100 N |
| Flame resistance | IEC 60332-1-2 |
| Halogen-free | According to IEC 60754-1 |
| Resistance to oil | in accordance with DIN EN 60811-2-1 |

Network cable - VS-M12MS-PPC/ME-94B-LI/5,0 - 1412477

Technical data

Line characteristics

| | |
|---------------------------------|---|
| Ambient temperature (operation) | -40 °C ... 70 °C (cable, fixed installation) |
| | -10 °C ... 50 °C (cable, flexible installation) |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27060307 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27061801 |

ETIM


| | |
|----------|----------|
| ETIM 3.0 | EC000830 |
| ETIM 4.0 | EC002599 |
| ETIM 5.0 | EC000830 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 31261501 |
| UNSPSC 7.0901 | 31261501 |
| UNSPSC 11 | 31261501 |
| UNSPSC 12.01 | 31261501 |
| UNSPSC 13.2 | 31261501 |


Drawings

Dimensioned drawing



Push-pull RJ45 connector IP65/67

Dimensioned drawing

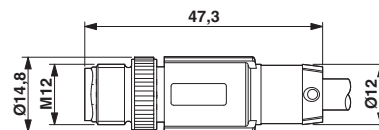

Plug, M12 x 1, straight, shielded

Network cable - VS-M12MS-PPC/ME-94B-LI/5,0 - 1412477

Circuit diagram

