



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Protective covers - HC-B06-HCLWS-PLR-BK - 1414634


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Protective cover B6, with single locking latch, protective cover material: PA, height: 21.6 mm, seal: yes, diameter of retaining cord eyelet: 30 mm

RoHS

### Key Commercial Data

Packing unit	10 STK
GTIN	 4 055626 131184
GTIN	4055626131184

### Technical data

#### Dimensions

Length	60 mm
Width	43 mm
Height	21.6 mm
Diameter of retaining cord eyelet	30 mm

#### Ambient conditions

Degree of protection	IP66
Ambient temperature (operation)	-20 °C ... 100 °C

#### General

Size	B6
Type	for sleeve housing for single locking latch
Material	PA
Seal material	NBR
Flammability rating according to UL 94	HB
Color	black
Seal present	yes
Connection	Plastic protective cover for short-term protection

## Protective covers - HC-B06-HCLWS-PLR-BK - 1414634

### Technical data

#### Standards and Regulations


Flammability rating according to UL 94	HB
--	----

#### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

### Drawings

Dimensional drawing

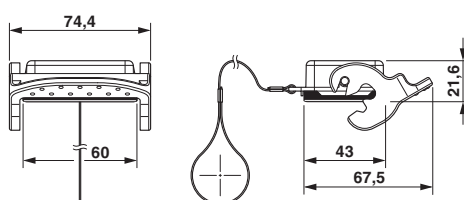

Dimensional drawing

### Approvals

#### Approvals

Approvals

EAC

Ex Approvals

#### Approval details

EAC	<b>EAC</b>	RU C- DE.AI30.B.01102
-----	------------	--------------------------

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>