

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








	ITEM ①	ITEM ②	ITEM ③	ITEM ◯4	ITEM ◯5	Г
PART NUMBER	BODY	CONTACT	INSULATOR	WASHER	NUT	
142-D901-401		BERYLLIUM COPPER GOLD PL .00003 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN		NICKEL PL .00005 MIN OVER	BRASS GOLD PL .DDOQ1 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	
142-D901-406	BRASS NICKEL PL .DDQ1 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER GOLD PL .00003 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	TEFLON	BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	BRASS NICKEL PL ,0001 MIN QVER COPPER PL ,00005 MIN	

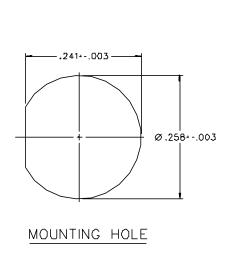

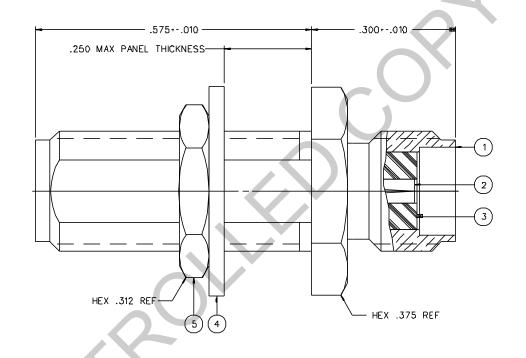

NOTES:

1. SPECIFICATIONS:

IMPEDANCE: 50 OHMS
FREQUENCY RANGE: 0-18 GHZ
VSWR: 1.05-01(5) MAX. (F IN GHz)
WORKING VOLTACE: 500 VRMS MAX AT SEA LEVEL
DIELECTRIC WITHSTANDING VOLTACE: 1500 VRMS MIN AT SEA LEVEL
INSULATION RESISTANCE:
CENTER CONTACT - INITIAL 4.0 MILLIOHM MAX, AFTER
ENVIRONMENTAL 6.0 MILLIOHM MAX
OUTER CONDUCTOR - INITIAL 2.0 MILLIOHM MAX
AFTER ENVIRONMENTAL NOT APPLICABLE
BRAID TO BODY - NOT APPLICABLE
CORONA LEVEL: 375 VOLTS MIN AT 7D.DDO FEET
INSERTION LOSS: .06 V F AT 6 GHz IF IN GHz)
RF LEAKACE: -90 08 MIN AT 2.5 GHz
RF HIGH POTENTIAL WITHSTANDING VOLTAGE: 1000 VRMS MIN AT 4 AND 7 MHz

MECHANICAL:

ENGAGE/DISENGAGE TORQUE: 2 INCH-POUNDS MAX MATING TORQUE: 7-10 INCH POUNDS COUPLING PROOF TORQUE: 15 INCH-POUNDS MIN COUPLING NUT RETENTION: NOT APPLICABLE CONTACT RETENTION: 4 LBS MIN AXIAL FORCE CABLE ACCEPTABLITY: NOT APPLICABLE CABLE HEX CRIMP SIZE: NOT APPLICABLE CABLE RETENTION: NOT APPLICABLE DURABILITY: 500 CYCLES MIN

ENVIRONMENTAL:

(MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF MIL-A-55339)
THERMAL SHOCK: MIL-STD-2D2, METHOD 107, CONDITION B
OPERATING TEMPERATURE: -65 DEG C TO 165 DEG C
CORROSION: MIL-STD-2D2, METHOD 101, CONDITION B
SHOCK: MIL-STD-2D2, METHOD 213, CONDITION I
VIBRATION: ML-STD-2D2, METHOD 204, CONDITION D
MOISTURE RESISTANCE: MIL-STD-2D2, METHOD 106

CUSTOMER DRAWING

DRAWING NO.

ENGINEERING RELEASE

- 142-0901-401/410 REVISIONS

THIS DRAWING TO BE INTERPRETED PER ANSI Y 14.5M - 1982

"µSTATION"

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED	DRAWN BY	DATE 6-27-89	Cinch Connectivity Solutions 299 Johnson Awe. Ste. 100 Wasera, MN 56093 1,800-247-8256		
DECINALS mm	CHECKED BY	DATE	TITLE ADAPTER ASSEMBLY, JACK TO BULKHEAD JACK		
NATL	APPROVED BY TAK	DATE 11-16-89	SMA		
FINSH	APPROVED BY	DATE 11-20-89	CODE NO. DRAWING NO.		
	RELEASE DATE	11-22-89	SCALE 10:1 U/N INCH SHEET 2 UF 2		