



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Marshalling panel - CUC-PP-FR19:1U-I-EMPTY:24 - 1422978

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Patch bay, 19" mounting, IP20, with 24 slots selectively for RJ45 cable connection modules, RJ45 coupling modules, LC duplex, SC simplex and MPO, medium gray




19" patch bay, for 24 inserts

Why buy this product

- assembly without special tools
- integrated cable tray
- Rugged design
- complete grounding concept integrated
- including mounting kit
- Marking window with interchangeable marking strips
- high packing density
- individually customized with RJ45 or FO inserts



Key Commercial Data

Packing unit	1 STK
GTIN	 4 055626 319926
GTIN	4055626319926

Technical data

Mechanical characteristics

Number of slots	24
Connection profile	RJ45
Connection method	Quick connection
Color	gray
Mounting type	19" rack
Insulation resistance	according to IEC 61010-1
Degree of protection	IP20
Size of housing	1

Marshalling panel - CUC-PP-FR19:1U-I-EMPTY:24 - 1422978

Technical data

Mechanical characteristics

No. of cable outlets	24
----------------------	----

Ambient conditions

Ambient temperature (operation)	5 °C ... 55 °C
Ambient temperature (assembly)	-25 °C ... 55 °C
Ambient temperature (storage/transport)	-5 °C ... 55 °C
Degree of protection	IP20

Material data

Flammability rating according to UL 94	V0
Housing material	PC-GF
Material	Steel, galvanized
Depth	83.4 mm
Height	43.6 mm

Standards and Regulations


Flammability rating according to UL 94	V0
Shock	Acceleration time 30 m/s ² in all 6 directions

Environmental Product Compliance

China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings

Dimensional drawing

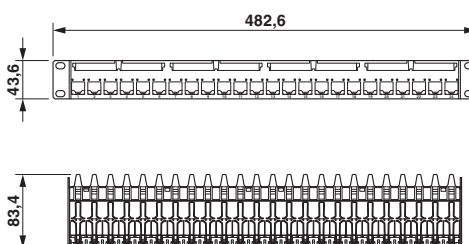

19" patch panel

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>