



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Sleeve housing - VC-K-T3-IN (13-25) - 1424368

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sleeve housing, plastic, type: VC3, black, with integrated cable entry from 13 to 25 mm diameter, locking screws with knurled head, sealable.

### Why buy this product

- Plastic housing with straight cable outlet and cable gland.
- Variable grommet with a seal area for a cable diameter of 10 mm - 25 mm.

### Key Commercial Data

Packing unit	1 STK
GTIN	
GTIN	4046356772945

### Technical data

#### Dimensions

Height	92.3 mm
--------	---------

#### Ambient conditions

Degree of protection	IP65
Ambient temperature (operation)	-40 °C ... 80 °C

#### General

Note	When using fiber optics, the bending radii of the cable manufacturers must be observed.
Type	VC3
Degree of protection	IP65
Flammability rating according to UL 94	V0
Locking type	Screw locking, Allen screw
Fixing screws	M4 (3 mm Allen screw)
Tightening torque, mounting screw	1.5 Nm ±0.3 Nm
Type of the screw connection	Pg29

# Sleeve housing - VC-K-T3-IN (13-25) - 1424368

## Technical data

### General

Cable outlet	straight
Housing material	PBT
Seal material	NBR
Ambient temperature (operation)	-40 °C ... 80 °C

### Standards and Regulations


Flammability rating according to UL 94	V0
----------------------------------------	----

### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

## Drawings

Dimensional drawing

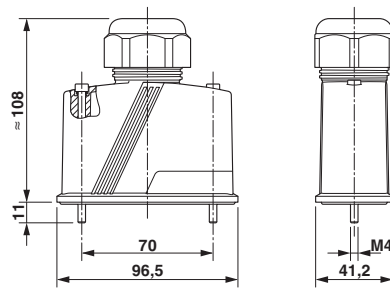

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>