



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832




Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
C	DCN 32895	03/05	BRT
D	DCN 42213	4/16	DAL

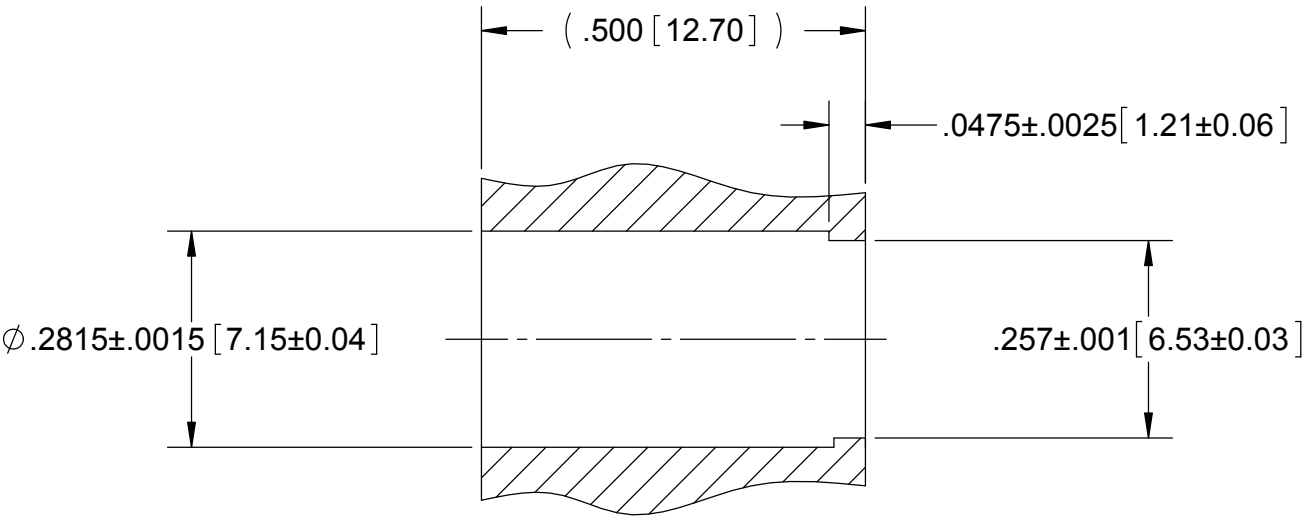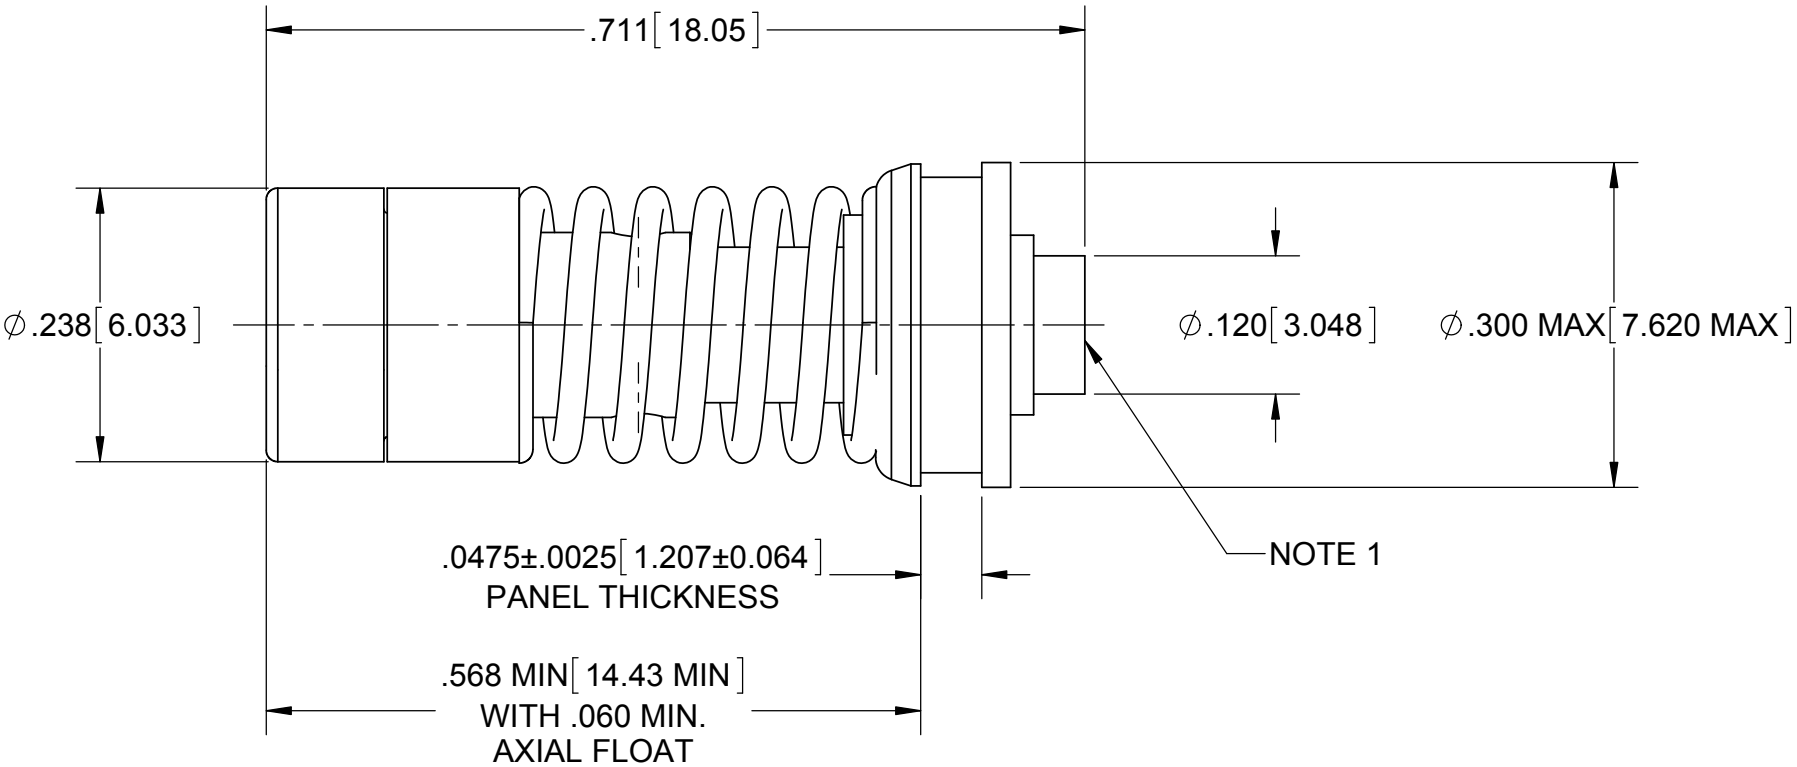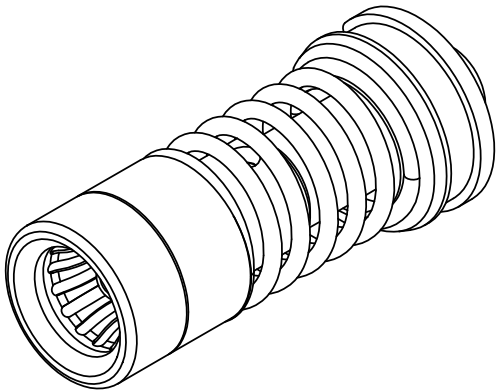

MOUNTING HOLE

NOTES:
1. ACCEPTS .085 SEMI-RIGID CABLE OR T-FLEX 405 CABLE.

MATERIAL:

BODY & INSERT:	STAINLESS STEEL PER AMS-5640, UNS S30300, TYPE 303
CONTACT, SPRING CLIP, CONTACT SLEEVE:	BERYLLIUM COPPER PER ASTM B196 ALLOY UNS C17300, COND TD04
SHIM SPRING, OUTER CONTACT:	BERYLLIUM COPPER PER ASTM B194 ALLOY UNS C17200, COND TD04
COIL SPRING:	MUSIC WIRE PER ASTM A228
E-RING:	STAINLESS STEEL PER ASTM A240 ALLOY UNS S30400, TYPE 304
INSULATOR:	PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B

FINISH:

BODY, INSERT, SPRING CLIP, CONTACTS, SHIM SPRING:	GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27; OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005 MIN.
COIL SPRING:	ZINC PER ASTM B633
E-RING:	PASSIVATED PER AMS-QQ-P-35, TYPE II

PERFORMANCE:

IMPEDANCE:	50 OHMS
FREQ. RANGE:	DC TO 28.0 GHz

MATERIAL:	SEE ABOVE	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1°0'
-----------	-----------	---