



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



HF Loop Antenna ID ISC.ANT800/600-DA

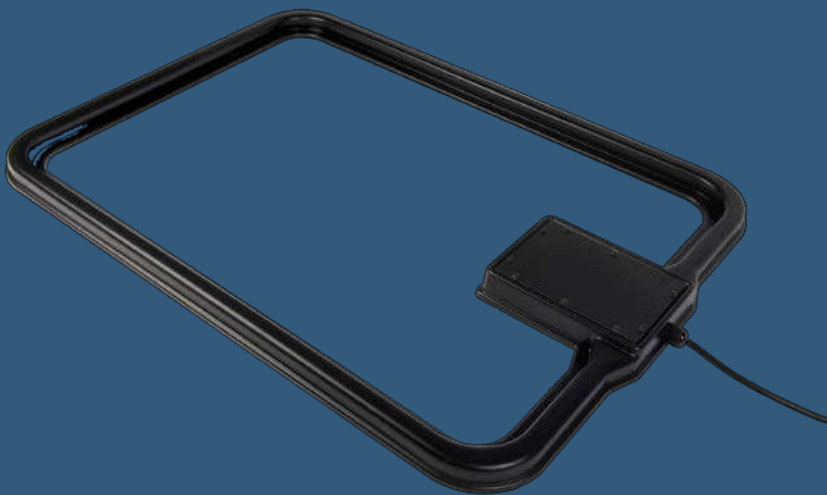

FEATURES

- Transmitting power up to 8 W
- Protection class IP65
- Versatile use with several HF readers
- Read range up to 100 cm
- Easy setup due to integrated dynamic antenna tuner (ID ISC.DAT)



SHORT DESCRIPTION

The HF Long Range Antenna ID ISC.ANT800/600-DA can be used in combination with the reader ID ISC.LR2500-A and the reader module ID ISC.LRM2500-A/-B.

The device is a single loop antenna with tuning circuitry and facilitates read ranges of up to 100 cm with a transmitting power of 4 W.

The antenna consists of the electrical antenna conductor, housing and the tuning circuitry ID ISC.DAT (Tuner) and is factory tuned on a wood base to an impedance of 50 Ω . After installing in changed ambient conditions, the antenna can be tuned using the corresponding commands.

TECHNICAL DATA

Dimensions (W x H x D)	852 mm x 620 mm x 40 mm (33.54inch x 24.41inch x 1.57inch)
Weight	approx. 2.5 kg
Housing	Plastic ABS
Color	black
Protection class	IP 65
Temperature range	
- Operation	- 25 °C up to 55 °C
- Storage	- 25 °C up to 60 °C
Humidity	5...95 % (not condensing)
Operating frequency	13.56 MHz
Maximum transmitting power	8 W
Permitted transmitting power	
EU (EN 300 330)	4 W
USA (FCC Part 15)	2 W
Canada (RSS-210)	2W
Read range	up to 100 cm*
Antenna connection	1 x SMA plug (50 Ω)
Antenna connection cable	RG58, 50 Ω , approx. 3.6 m

* Read ranges using a transponder 46 x 75 mm² over the centre of the antenna and parallel orientation to the antenna

STANDARD CONFORMITY

Radio license	
Europe	EN 300 330
USA	FCC 47 CFR Part 15
Canada	RSS210
EMC	EN 301 489
Safety	
Low voltage	EN 60950
Human Exposure	EN 50364

FEIG ELECTRONIC reserves the right to change specification without notice at any time. Stand of information: November 2016.



ORDER DESCRIPTION

ID ISC.ANT800/600-DA HF Antenna