



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**Model 1452**  
**Adapter-Binding Posts to BNC Receptacle**

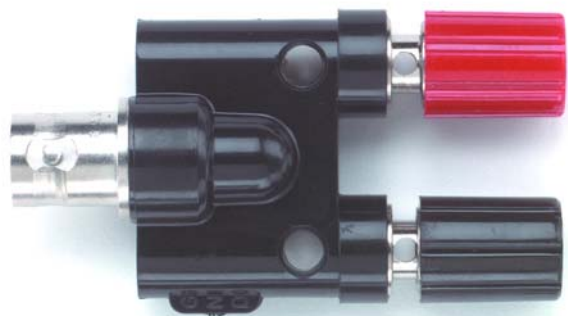

**Model 1452**  
**Adapter-Binding Posts to BNC Receptacle**

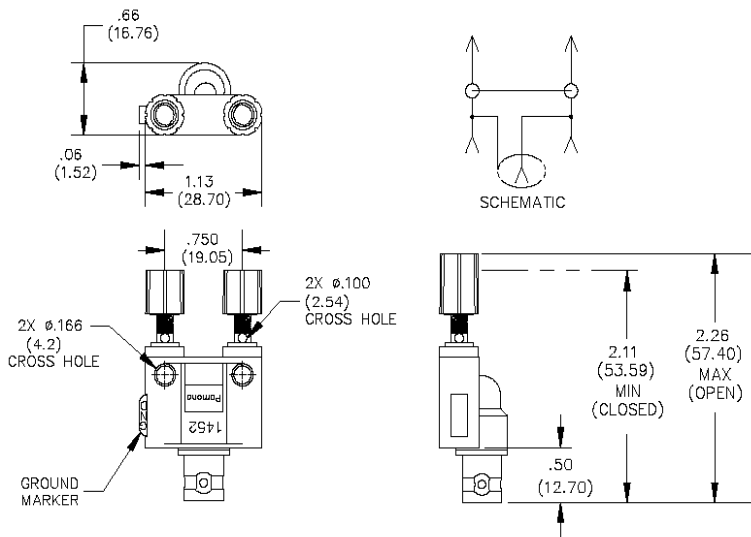

**Features**

- Permits single or double banana plugs to be used with equipment having a BNC male.
- Cross holes .166 (4.2) dia. in body provide side stack up connections.

**Materials**

Upper Connector: Binding Posts, Insulated.

Material: Binding Post body, brass H.H. per QQ-B-626, Alloy 360.

Finish: Nickel plated per QQ-N-290, class 2 (.0002 min.).

Insulation: Acrylonitrile-Butadiene-Styrene, molded to Binding Posts and BNC receptacle.

Color: One Red and one Black (Gnd).

Operating Temperature: +115°C. (+239°F.) Max.

Marking: "POMONA 1452"

Lower Connector: BNC receptacle, comparable to UG 1094/U.

Finish: Body and fittings, tarnish resistant

Nominal Impedance: 50 Ohms

**Specifications**

Operating Temperature: +50°C. (+122°F.) Max.

Operating Voltage: Hand-held testing: 30 VAC/60 VDC Max.

Hands free testing in controlled voltage environments: 500 VRMS

**Ordering Information**

Model: 1452

**USA:** Sales: 800-490-2361  
Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
Fax: 425-446-5844

**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500

**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.