

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









Type 12 Wiring Trough 1486 Series







Application

· Designed to enclose and protect multiple wiring junctions from dirt, dust,

Standards

- UL 870 Type 1
- CSA Type 1
- Complies with
 - NEMA Type 12
 - o JIC EGP-1-1967
 - o JIC EMP-1-1967
 - o IEC 60529, IP54


Construction


- Formed 14 gauge steel.
- Smooth continuously welded seams.
- Butt hinged cover is secured with easily operated screw clamps.
- Oil resistant gaskets are permanently secured.
- 12 gauge external mounting feet are welded to the back.

Finish

Part No.

Troughs and covers are finished in ANSI 61 gray powder coating.

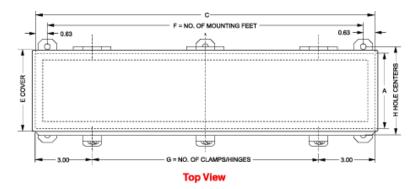

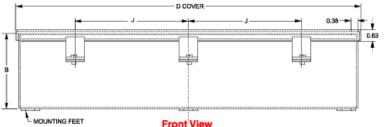

C

Cover Size

Ε

G

Н

D

Overall Dimensions



(lbs)

	Overall Dimensions			Cover Size						Ship Wt.
Part No.	Α	В	С	D	E	F	G	Н	J	(lbs)
1486B12	2.50	2.50	12.00	12.31	2.84	2.00	2.00	3.19	6.00	3
1486B18	2.50	2.50	18.00	18.31	2.84	2.00	2.00	3.19	12.00	5
1486B24	2.50	2.50	24.00	24.31	2.84	2.00	3.00	3.19	9.00	6
1486B30	2.50	2.50	30.00	30.31	2.84	3.00	3.00	3.19	12.00	9
1486B36	2.50	2.50	36.00	36.31	2.84	3.00	3.00	3.19	15.00	10
1486B48	2.50	2.50	48.00	48.31	2.84	3.00	3.00	3.19	21.00	13
1486B60	2.50	2.50	60.00	60.31	2.84	3.00	4.00	3.19	18.00	16
1486B72	2.50	2.50	72.00	72.31	2.84	3.00	4.00	3.19	22.00	19
1486C12	4.00	4.00	12.00	12.31	4.34	2.00	2.00	4.69	6.00	6
1486C18	4.00	4.00	18.00	18.31	4.34	2.00	2.00	4.69	12.00	8
1486C24	4.00	4.00	24.00	24.31	4.34	2.00	3.00	4.69	9.00	10
1486C30	4.00	4.00	30.00	30.31	4.34	3.00	3.00	4.69	12.00	13
1486C36	4.00	4.00	36.00	36.31	4.34	3.00	3.00	4.69	15.00	16
1486C48	4.00	4.00	48.00	48.31	4.34	3.00	3.00	4.69	21.00	20
1486C60	4.00	4.00	60.00	60.31	4.34	3.00	4.00	4.69	18.00	25
1486C72	4.00	4.00	72.00	72.31	4.34	3.00	4.00	4.69	22.00	30
1486D12	6.00	6.00	12.00	12.31	6.34	2.00	2.00	6.69	6.00	9
1486D18	6.00	6.00	18.00	18.31	6.34	2.00	2.00	6.69	12.00	16
1486D24	6.00	6.00	24.00	24.31	6.34	2.00	3.00	6.69	9.00	16
1486D30	6.00	6.00	30.00	30.31	6.34	3.00	3.00	6.69	12.00	19
1486D36	6.00	6.00	36.00	36.31	6.34	3.00	3.00	6.69	15.00	23
1486D48	6.00	6.00	48.00	48.31	6.34	3.00	3.00	6.69	21.00	29
1486D60	6.00	6.00	60.00	60.31	6.34	3.00	4.00	6.69	18.00	32
1486D72	6.00	6.00	72.00	72.31	6.34	3.00	4.00	6.69	22.00	43

Data subject to change without notice