



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		C1		REVISED PER ECO-11-005033	23MAR11	RK	HMR


Tooling Drawing NO.  
 USB A: TR00662  
 USB B: TR00664

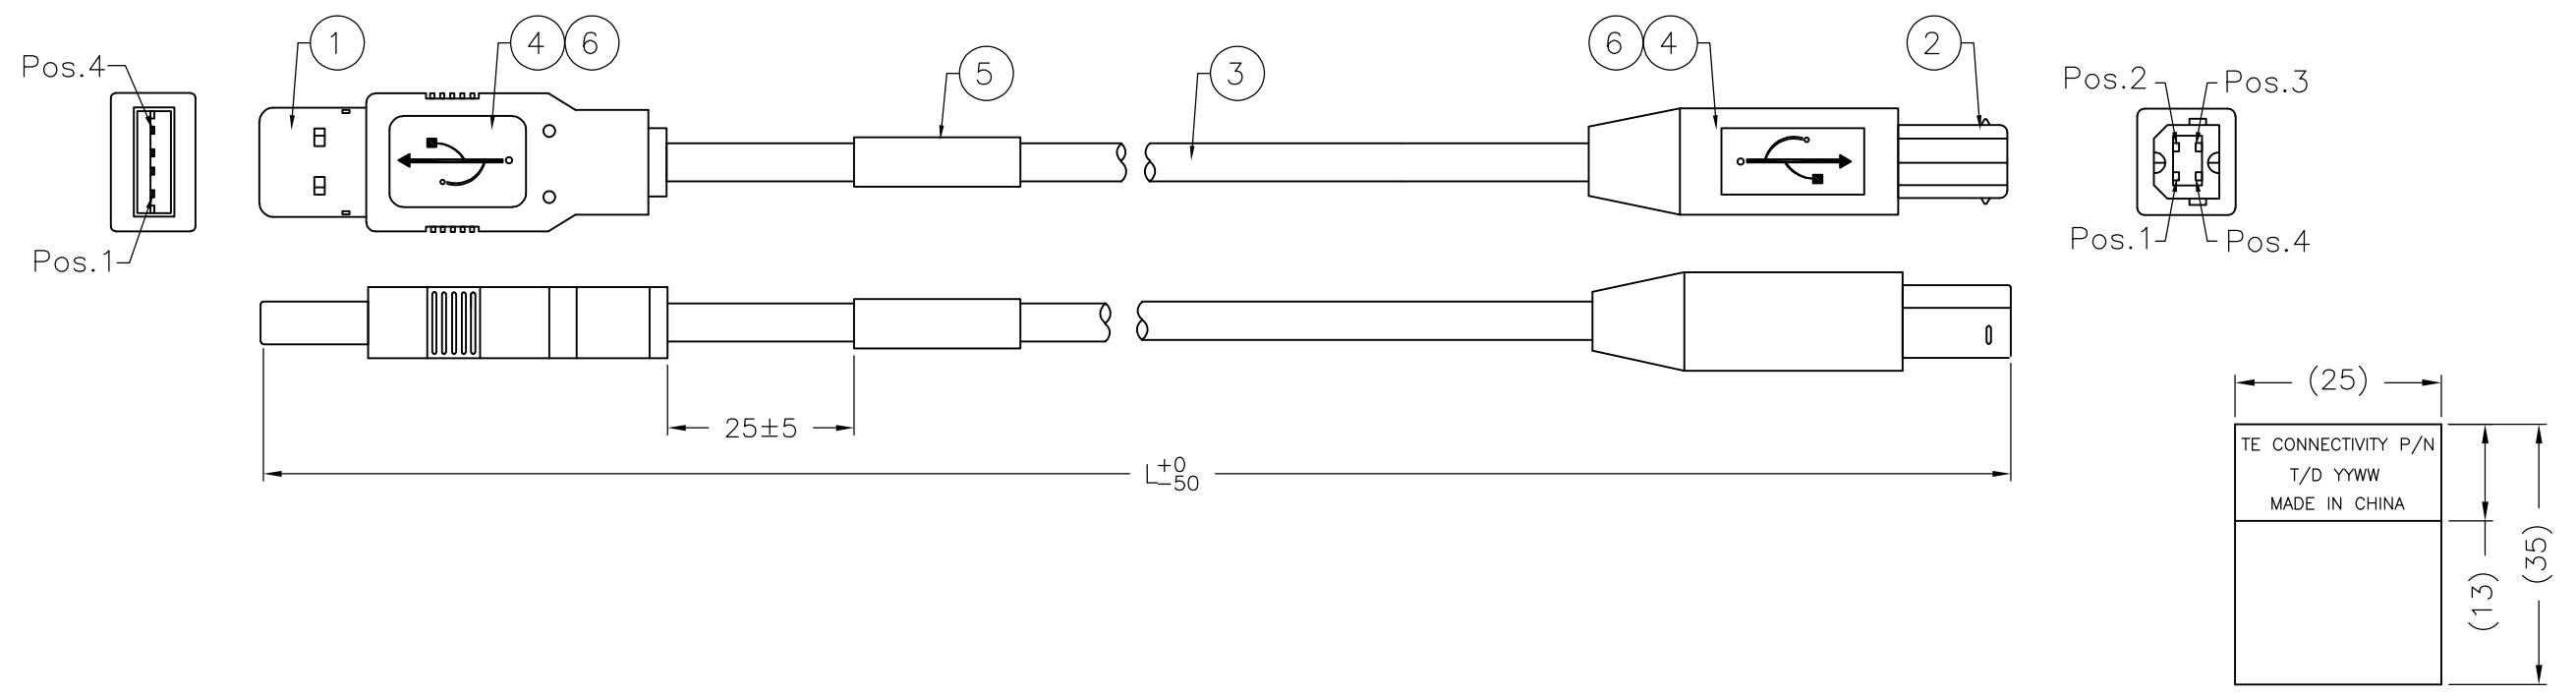

- NOTES:
1. TESTED FOR CONTINUITY, SHORTS AND OPENS, HI-POT 630V FOR 10MS.
  2. CABLE ASSEMBLY MEETS USB 2.0 STANDARDS.
  3. EXPOSED CABLE BRAID IS NOT PERMISSIBLE BEYOND OVERMOLD.
  4. THE FINAL CABLE ASSEMBLY MAXIMUM LENGTH NOT TO EXCEED 1700MM PER USB SPECIFICATIONS.
  5. MEETS REQUIREMENTS OF EU DIRECTIVE 2002/95/EC

PART NO.	1487587-1	1487587-2	1487587-3
LENGTH(L)	1000	1300	830

PIN ASSIGNMENT :

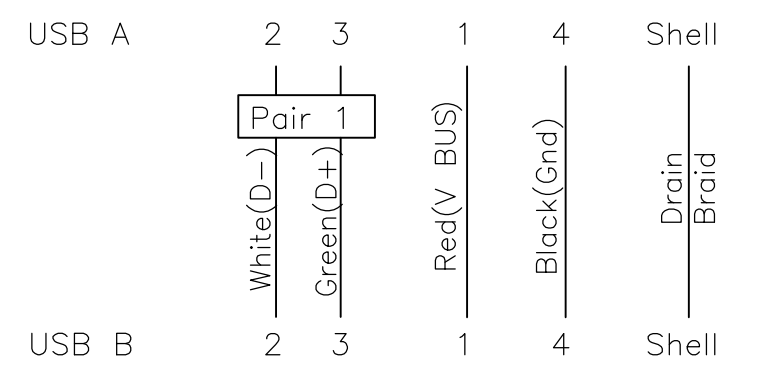

AR	AR	AR	MR	COPPER FOIL, W: 5MM, 360° SOLDER	6
1	1	1	PC	Lable, 25x35mm, White 25x13mm	5
AR	AR	AR	KG	Overmold PVC, 40P, Color: White(WH01)	4
AR	AR	AR	MR	USB 2.0 Cable 28AWG*1P+26AWG*2C+Al/Mylar +Drain+Braid, Color: White(WH01).	3
1	1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 B Type.	2
1	1	1	EA	USB 4Pin Connector Contacts: Gold 30U Plated, Shell: Nickel Plated, Housing UL94V-0 A Type.	1
-3	-2	-1	U/M	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN BOVEY LIU 25FEB02	<b>STE</b> TE Connectivity	
		CHK J.HUNT 25FEB02		
DIMENSIONS: mm		APVD J.HUNT 25FEB02	NAME USB A TYPE TO USB B TYPE CABLE ASSEMBLY	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		
0 PLC ± -		APPLICATION SPEC		
1 PLC ± -				
2 PLC ± -				
3 PLC ± -				
4 PLC ± -				
ANGLES ± -				
MATERIAL -		FINISH -	SIZE A3	CAGE CODE 00779
			DRAWING NO C-1487587	RESTRICTED TO -
			WEIGHT -	
			CUSTOMER DRAWING	SCALE N.T.S
				SHEET 1 OF 1
				REV C1