



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Ditto™ Wire-to-Wire Connectors with Positive and Friction Lock




Available in glow wire capable and positive lock versions, Ditto wire-to-wire interconnects halve the tooling and setup costs of low-amperage consumer and lighting applications for increased cost-savings and operational efficiency

Features and Benefits

Positive (dual) lock feature on polarized housing	Keeps connectors correctly mated during rigorous operations
Anti-twist housing feature	Ensures proper seating of terminal in the housing; prevents contact wipe against connector housing during insertion
Glow wire housings	Ensures safety and protection of end-users in the event of glow wire overload
Reinforced wing-style crimp terminals	Protects locking lance from operator or assembly-processing damage
Polarization features on terminal	Prevents flipped (upside down) insertion into connector housing
Pre-assembled 6 and 12-inch pigtail wire harnesses	Allow fast integration into applications requiring design flexibility and customization capability

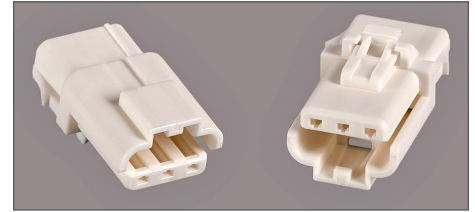

Ditto™ 3.00mm Pitch Connector Housing with Positive Lock (Series 150170; 150201 - Glow wire capable)

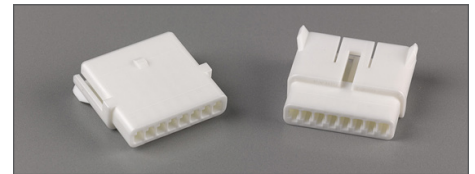


Ditto™ 2.50mm Pitch Connector Housing with Friction Lock (Series 36877)



Wing-shaped Crimp Terminals (used with positive lock housings) (Series 150200)



Crimp Terminals (used with friction lock housings) (Series 36876)

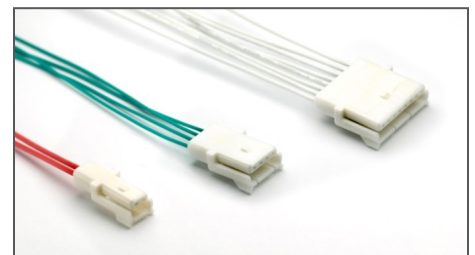


Ditto™ Pigtail Wire Harnesses (2 to 8 circuits; 6 and 12-inch configurations)


Applications

Consumer / Home Appliances

- Fitness
- Home Appliances
- Home Entertainment
- Home Office
- Home Security



Indoor illumination



Outdoor illumination

Solid State Lighting

- Indoor and Outdoor Illumination
- Displays and Signage
- Transportation Lighting

Automotive (Non-USCAR vehicles)

- 2 and 3-wheelers (motorcycles, scooters, tuk-tuks and more)



Consumer/home appliance



3-Wheeler Vehicles



2-Wheeler Vehicles

Ditto™ Wire-to-Wire Connectors with Positive and Friction Lock



Unique And Useful Differentiation vs. Similar Ditto™ Connectors

Product and Technical Differences		
Attribute	Friction-lock Housing	Positive-lock Housing
Type	Genderless wire-to-wire interconnect solution	
Pitch	2.50mm	3.00mm
Current rating	5.6 to 8.0A max.	4.2 to 5.0A max.
Applicable wire sizes	26 to 20 AWG	
Voltage rating	350V	350V
Genderless connector	Yes	Yes
Mated length	30.70mm	30.70mm (without TPA accessory)
Mated volume (mm and by %)	2,165 mm ³ (without ears) 2,870 mm ³ (with ears)	3,960mm ³
Crimp Terminal Design	Reinforced, sheared locking tang ensures no terminal back-out	Reinforced wing-style feature-protected locking tang
Special Features	Friction lock used for connector mating	Dual positive lock on housing ensures no accidental disconnects

Applicable Wiring

The table below shows the range and sizes of UL style wires supported by the Ditto connector system

Barrel-type terminals are used for universal support of a variety of wire gauge and styles

Wire Size	Max Outer Diameter (mm)		
	AWG	UL 1007	UL 1061
26		1.40	1.05
24		1.50	1.15
22		1.70	1.35
20		N.A.	1.55

Ordering Information

Positive Lock Crimp Housings		Friction Lock Crimp Housing	6 or 12-inch Pigtail Wire Harnesses
Non Glow wire versions	Glow wire Capable	Non-Glow wire version	
150170	150201	36877	150207

Crimp Terminals, reinforced, wing-shaped (used with Positive Lock Crimp Housings)	Crimp Terminals (for use with Friction Lock Crimp Housings)
150200 (Tin-Brass)	36876

Application Tooling			Terminal	Insulation Diameter	Strip Length
Applicator	Hand Tool	Extraction Tool			
63903-8400	63827-8500	63813-1400	150200-0001 (AWG: 20 to 22)	1.70 to 1.35mm	2.3 to 2.8mm
63903-8500	63827-8600		150200-0002 (AWG: 24 to 26)	1.50 to 1.05mm	

www.molex.com/link/ditto.html