



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






# Metal-Out Static Shielding Bag 1500

This transparent metal-out static shielding bag is designed to provide static safe packaging for the shipment and/or storage of ESD sensitive items including outside ESD protected areas. Bags are printed with an ESD protective symbol and a lot code for traceability. Open Top and ZipTop styles are available. The bags are heat sealable.

SCS Metal-Out Static Shielding Bags 1500 are manufactured from a top coat, metal, polyester, polyethylene laminate. The proprietary top coating is designed to protect the metal layer. Polyester dielectric, in concert with the metal layer, is intended to provide shielding of Electrostatic Discharge (ESD) and to help minimize the penetration of electric field.


Meets ANSI/ESD S20.20 Packaging Standard, ANSI/ESD S541, and Static Control Bag ANSI/ESD S11.4 Level 3

Physical	Typical Value	Testing Method
Puncture Resistance	10 lbs, 44 N	MIL-STD-3010 Method 2065
Seal Strength	14 lbs, 62 N	ASTM D882
Thickness	3 mils, .0762 mm +/-10%	MIL-STD-3010 Test Method 1003 Method B
Marking Adhesion	Pass	IPC-TM-650 2.4.1
Transparency	40%	Tobias
Electrical	Typical Value	Testing Method
Discharge Shielding	<10 nJ	ANSI/ESD STM11.31
Surface Resistance - Interior	$1 \times 10^4$ to $< 1 \times 10^{11}$ ohms	ANSI/ESD STM11.11
Surface Resistance - Exterior	$1 \times 10^4$ to $< 1 \times 10^6$ ohms	ANSI/ESD STM11.11
Charge Retention	<100 volts	1410.515 Rev 2
Cleanliness	Typical Value	Testing Method
Silicone	Not Detected	ASTM-E168 (FTIR)
Heat Sealing Conditions	Typical Value	
Temperature	300°F – 375°F, 149°C – 190°C	
Time	0.5 – 3.5 seconds	
Pressure	30 – 70 PSI, 206 – 482 KPa	

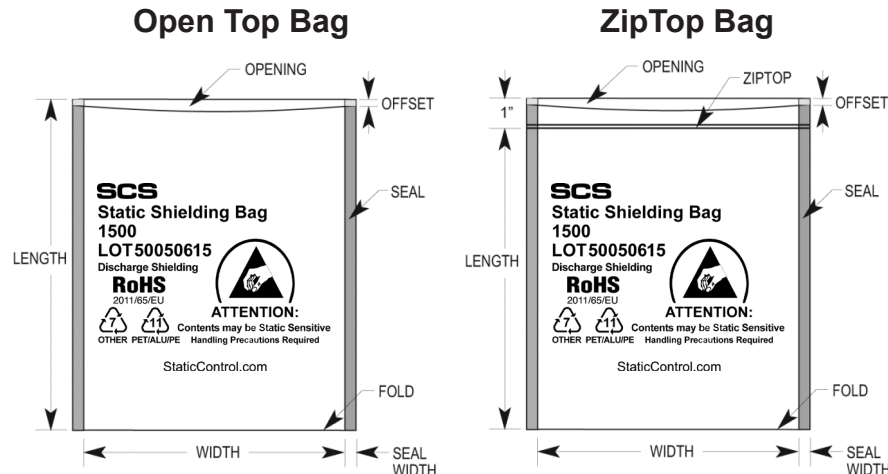

Tolerance: Width -0, +1/4"  
 Length +/- 1/8" Offset 0 to 1/4"  
 Seal width 3/8" with a tolerance of +/- 1/8"

Note: Standard bag markings shown above and are not to scale.

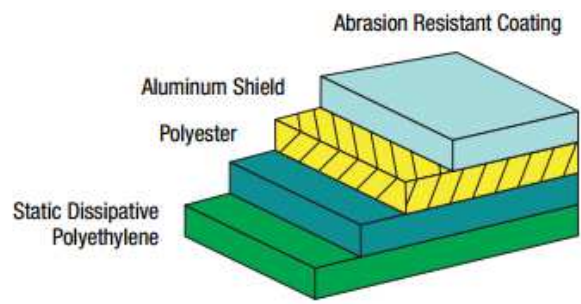

**RoHS 2, REACH, and Conflict Minerals Statement**  
 None of the RoHS 2 restricted materials or REACH substances of very high concern as of 2014/12/17, or Conflict Minerals are intentionally added in manufacturing this product. Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE. See [SCS Warranty, Limitation of Liability and Remedies](#)

Bag is free of amines, N-octanoic acid, silicones and heavy metals.

This product is intended for commercial use only. This product is not on the Qualified Product Listing under the Defense Standardization Program.

Specifications and procedures subject to change without notice.

1500 SERIES METAL-OUT STATIC SHIELDING BAG			
926 JR Industrial Drive, Sanford, NC 27332 WEB SITE: <a href="http://StaticControl.com">StaticControl.com</a> PHONE (919) 718-0000	<b>DRAWING NUMBER</b> 1500 Series	<b>DATE</b> November 2015	

