

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

Specification Sheet

Part Number: 151-14059

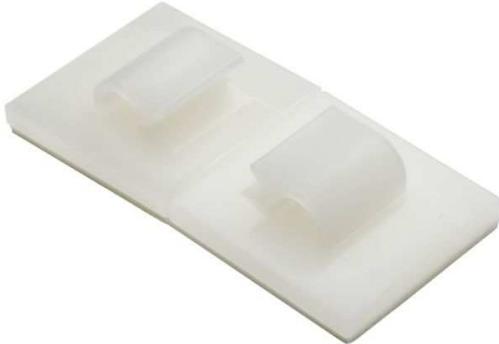

RB Adhesive Cable Clamp, 0.20" Max. Bundle Dia, PA66, Natural, 100/pkg

Article Number	151-14059
Type	RB5
Color	Natural (NA)
Features & Benefits	<ul style="list-style-type: none">Simple snap-in design allows for quick and easy installation or removal of cables.Rubber based adhesive allows for a permanent bond to most surfaces.
Quantity Per	pcs.
Product Description	The RB Adhesive cable clamps are designed with an easy snap-in feature allowing simple installation or removal of cables, pipes or hoses. The rubber based adhesive allows for a permanent bond to most surfaces.
Short Description	RB Adhesive Cable Clamp, 0.20" Max. Bundle Dia, PA66, Natural, 100/pkg

Global Part Name

RB5-PA66-NA

Length L (Imperial)

0.75

Length L (Metric)

19.0

Fixation Method

Pasting / Stick

Variant

Closed

Width W (Imperial)

0.75

Width W (Metric)

19.0

Bundle Diameter Max (Imperial)

0.20

Bundle Diameter Max (Metric)

5.0

Height H (Imperial)

0.24

Height H (Metric)

6.0

Nominal Diameter (Imperial)

3/16

Nominal Diameter (Metric)

5.0

Material

Polyamide 6.6 (PA66)

Material Shortcut

PA66

Adhesive

Synthetic rubber with base of polyethylene foam

Flammability

UL 94 V2 (excluding adhesive)

UV Resistant (Yes/No)

No

Adhesive Operating Temperature

-40°F to +140°F (-40°C to +60°C)

Operating Temperature (Metric)

-40°F to +185°F (-40°C to +85°C)

Reach Complaint(Article 33)

Yes

RoHS Complaint

Yes

Package Quantity(Imperial)

100

Package Quantity (Metric)

100

Customs Number

3926909987

Content Unit(BMEcat)

pcs.

Weight (Metric)

3