



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com



Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Omnimate Range - 5.08 mm Pitch



## Pin headers SL 5.08/90



Technical data	VDE	UL	CSA
<b>Rated voltage (V)</b>	250*	300	300
<b>Rated current (A)</b>	12	15	15

\*Pollution severity 3 / Overvoltage category III  
Additional technical data see page 216




**Solder pin length**      4.5 mm      4.5 mm

**Color**            

Poles	Type	Part No.	Part No.	Qty.
2	SL 5.08/90/2	1512660000	1512610000	100
3	SL 5.08/3/90	1512760000	1512710000	100
4	SL 5.08/4/90	1512860000	1512810000	100
5	SL 5.08/5/90	1512960000	1512910000	50
6	SL 5.08/6/90	1513060000	1513010000	50
7	SL 5.08/7/90	1513160000	1513110000	50
8	SL 5.08/8/90	1513260000	1513210000	50
9	SL 5.08/9/90	1513360000	1513310000	50
10	SL 5.08/10/90	1513460000	1513410000	50
11	SL 5.08/11/90	1513560000	1513510000	50
12	SL 5.08/12/90	1513660000	1513610000	50
13	SL 5.08/13/90	1513760000	1513710000	50
14	SL 5.08/14/90	1513860000	1513810000	50
15	SL 5.08/15/90	1513960000	1513910000	50
16	SL 5.08/16/90	1514060000	1514010000	50
17	SL 5.08/17/90	1514160000	1514110000	20
18	SL 5.08/18/90	1514260000	1514210000	20
19	SL 5.08/19/90	1514360000	1514310000	20
20	SL 5.08/20/90	1514460000	1514410000	20
21	SL 5.08/21/90	1514560000	1514510000	20
22	SL 5.08/22/90	1514660000	1514610000	20
23	SL 5.08/23/90	1514760000	1514710000	20
24	SL 5.08/24/90	1514860000	1514810000	20

Accessories	Page
Mounting	-
Marking	190
Coding	192, 193
Miscellaneous	199

## Pin headers SL 5.08/90B



Technical data	VDE	UL	CSA
<b>Rated voltage (V)</b>	250*	300	300
<b>Rated current (A)</b>	12	15	15

\*Pollution severity 3 / Overvoltage category III  
Additional technical data see page 216




**Solder pin length**      4.5 mm      4.5 mm

**Color**            

Poles	Type	Part No.	Part No.	Qty.
2	SL 5.08/2/90B	1514960000	1514910000	100
3	SL 5.08/3/90B	1515060000	1515010000	100
4	SL 5.08/4/90B	1515160000	1515110000	100
5	SL 5.08/5/90B	1515260000	1515210000	50
6	SL 5.08/6/90B	1515360000	1515310000	50
7	SL 5.08/7/90B	1515460000	1515410000	50
8	SL 5.08/8/90B	1515560000	1515510000	50
9	SL 5.08/9/90B	1515660000	1515610000	50
10	SL 5.08/10/90B	1515760000	1515710000	50
11	SL 5.08/11/90B	1515860000	1515810000	50
12	SL 5.08/12/90B	1515960000	1515910000	50
13	SL 5.08/13/90B	1516060000	1516010000	50
14	SL 5.08/14/90B	1516160000	1516110000	50
15	SL 5.08/15/90B	1516260000	1516210000	50
16	SL 5.08/16/90B	1516360000	1516310000	50
17	SL 5.08/17/90B	1516460000	1516410000	20
18	SL 5.08/18/90B	1516560000	1516510000	20
19	SL 5.08/19/90B	1516660000	1516610000	20
20	SL 5.08/20/90B	1516760000	1516710000	20
21	SL 5.08/21/90B	1516860000	1516810000	20
22	SL 5.08/22/90B	1516960000	1516910000	20
23	SL 5.08/23/90B	1517060000	1517010000	20
24	SL 5.08/24/90B	1517160000	1517110000	20

Accessories	Page
Mounting	187*
Marking	190
Coding	192, 193
Miscellaneous	199

## Pin headers SL 5.08/135

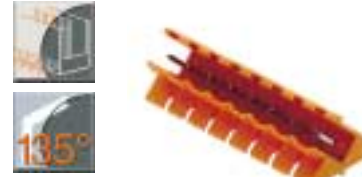

Technical data	VDE	UL	CSA
<b>Rated voltage (V)</b>	250*	300	300
<b>Rated current (A)</b>	12	15	15

\*Pollution severity 3 / Overvoltage category III  
Additional technical data see page 216

**Solder pin length**      4.5 mm      4.5 mm

**Color**            

Poles	Type	Part No.	Part No.	Qty.
2	SL 5.08/2/135	1605760000	1635270000	100
3	SL 5.08/3/135	1605770000	1635280000	100
4	SL 5.08/4/135	1605780000	1635290000	100
5	SL 5.08/5/135	1605790000	1635300000	50
6	SL 5.08/6/135	1605800000	1635310000	50
7	SL 5.08/7/135	1605810000	1635320000	50
8	SL 5.08/8/135	1605820000	1635330000	50
9	SL 5.08/9/135	1605830000	1635340000	50
10	SL 5.08/10/135	1605840000	1635350000	50
11	SL 5.08/11/135	1605850000	1635360000	50
12	SL 5.08/12/135	1605860000	1635370000	50
13	SL 5.08/13/135	1605870000	1635380000	50
14	SL 5.08/14/135	1605880000	1635390000	50
15	SL 5.08/15/135	1605890000	1635400000	50
16	SL 5.08/16/135	1605900000	1635410000	50
17	SL 5.08/17/135	1605910000	1635420000	20
18	SL 5.08/18/135	1605920000	1635430000	20
19	SL 5.08/19/135	1605930000	1635440000	20
20	SL 5.08/20/135	1605940000	1635450000	20
21	SL 5.08/21/135	1605950000	1635460000	20
22	SL 5.08/22/135	1605960000	1635470000	20
23	SL 5.08/23/135	1605970000	1635480000	20
24	SL 5.08/24/135	1605980000	1635490000	20

Accessories	Page
Mounting	-
Marking	190
Coding	192, 193
Miscellaneous	-