



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SAC-3P-M12Y/2XM12FS B PE S21

Order No.: 1514016

The illustration shows the green standard version

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1514016>Y-distributor, 3-pos. +PE, straight M12 plug on 2 x straight M12
socket, PIN 2+4 bridged, inner gauge of 21 mm

Commercial data

GTIN (EAN)	4017918943523
Note	Made-to-order
sales group	D116
Pack	5 pcs.
Customs tariff	85444290
Weight/Piece	0.02972 KG
Catalog page information	Page 110 (PC-2005)

Product notes

WEEE/RoHS-compliant since:
01/06/2009

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

Rated current at 40°C	4 A
Rated voltage	60 V
Number of positions	3
Volume resistance	≤ 5 mΩ
Insulation resistance	≥ 100 MΩ

Ambient temperature (operation)	-25 °C ... 90 °C (Male connector / female connector)
General characteristics	
Standards/regulations	M12 male connector IEC 61076-2-101
Coding	A - standard
Surge voltage category	II
Pollution degree	3
Degree of protection	IP65/IP68/IP69K
Insertion/withdrawal cycles	≥ 100
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	TPU GF
Material of grip body	TPU, hardly inflammable, self-extinguishing
Material, knurls	Zinc die-cast, (nickel-plated)
Sealing material	NBR
Status display	No

Certificates / Approvals




Certification

CUL Listed, UL Listed


Diagrams/Drawings

Dimensioned drawing

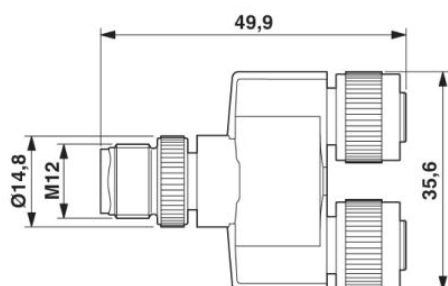


Connector M12 x 1, Y distributor, inner gauge of 21 mm

Schematic diagram

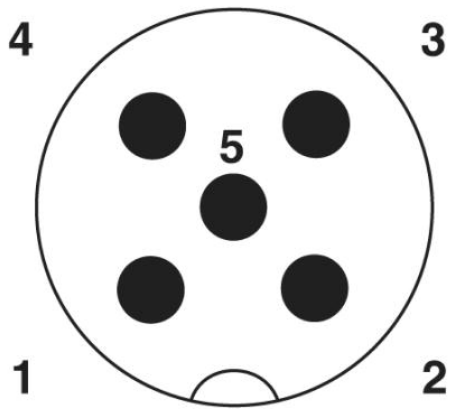

Pin assignment M12 male connector, 5-pos., A-coded, male side

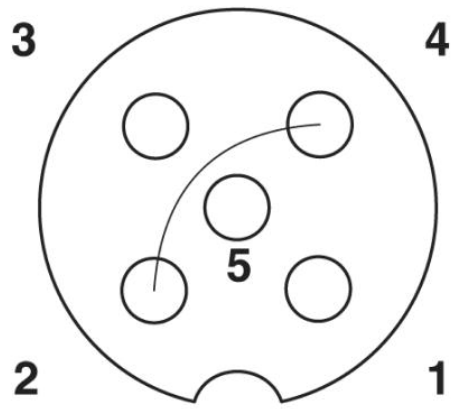

Connector pin assignment M12 socket, 3-pos., bridged, with PE, A-coded, female side view

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;