



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SERIES 1537R
1537 

Molded Unshielded RF Coils

Actual Size

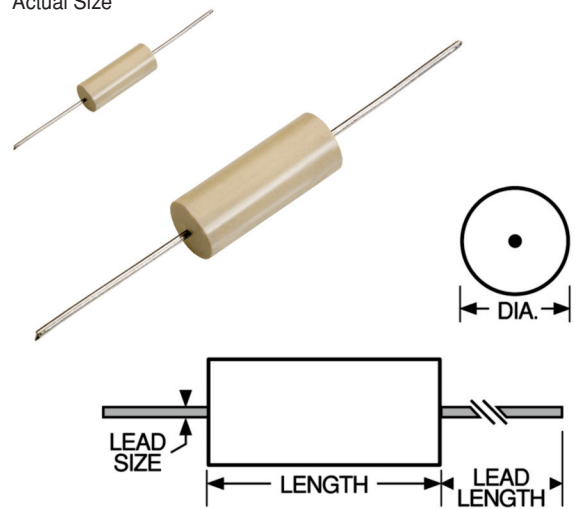

Military Specifications MS14046 (LT10K); MS18130 (LT4K); MS90538 (LT10K);
 g No MS # Issued

Physical Parameters

	Inches	Millimeters
Length	0.375 ± 0.010	9.53 ± 0.25
Diameter	0.156 ± 0.010	3.96 ± 0.25
Lead Size		
AWG #22 TCW	0.025 ± 0.002	0.635 ± 0.051
Lead Length	1.44 ± 0.12	36.58 ± 3.05

Current Rating at 90°C Ambient

LT4K 35°C Rise
 LT10K 15°C Rise

Operating Temperature Range

LT4K -55°C to +125°C;
 LT10K -55°C to +105°C

Maximum Power Dissipation at 90°C

LT4K 0.312 W
 LT10K 0.134 W

Weight Max. (Grams) 0.9

• For in-between values, see Series 511 (page 44)

Marking DELEVAN; inductance with units and tolerance; date code (YYWWL). Note: An R before the date code indicates a RoHS component.

Example: 1537-00J

<i>Front:</i>	<i>Reverse:</i>
DELEVAN	.15uH±5%
.15uH±5%	0841A

Packaging Tape & reel: 12" reel, 2500 pieces max.; 14" reel, 4000 pieces max.

Made in the U.S.A.

DASH NUMBER*	MIL DASH #	INDUCTANCE (µH)	TOLERANCE	Q MINIMUM	TEST FREQUENCY (MHz)	SRF MINIMUM (MHz)	DC RESISTANCE MAXIMUM (OHMS)	CURRENT RATING MAXIMUM (mA)
--------------	------------	-----------------	-----------	-----------	----------------------	-------------------	------------------------------	-----------------------------

MS18130- SERIES 1537 PHENOLIC CORE (LT4K)								
-00M	1	0.15	± 20%	50	25.0	525.0	0.03	2740
-02M	2	0.22	± 20%	50	25.0	450.0	0.055	2020
-04M	3	0.33	± 20%	45	25.0	360.0	0.09	1580
-06M	4	0.47	± 20%	45	25.0	310.0	0.12	1370
-07K	5	0.56	± 10%	50	25.0	280.0	0.135	1290
-08K	6	0.68	± 10%	50	25.0	250.0	0.15	1220
-10K	7	0.82	± 10%	50	25.0	220.0	0.22	1020
-12K	8	1.00	± 10%	50	25.0	200.0	0.29	880
-14K	9	1.20	± 10%	33	7.9	180.0	0.42	730
-16K	10	1.50	± 10%	33	7.9	160.0	0.50	670
-18K	11	1.80	± 10%	33	7.9	150.0	0.65	590
-20K	12	2.20	± 10%	33	7.9	135.0	0.95	485
-22K	13	2.70	± 10%	33	7.9	120.0	1.20	430
-24K	14	3.30	± 10%	33	7.9	110.0	2.00	335
-26K	15	3.90	± 10%	33	7.9	100.0	2.30	310
-28K	16	4.70	± 10%	33	7.9	90.0	2.60	294

MS14046- SERIES 1537 IRON CORE (LT10K)								
-30K	1	5.60	± 10%	45	7.9	60.0	0.32	565
-32K	2	6.80	± 10%	50	7.9	55.0	0.50	450
-34K	3	8.20	± 10%	50	7.9	50.0	0.60	410
-36K	4	10.0	± 10%	55	7.9	45.0	0.90	335
-38K	5	12.0	± 10%	65	2.5	42.0	1.10	305
-40K	6	15.0	± 10%	65	2.5	40.0	1.40	271
-42K	7	18.0	± 10%	75	2.5	34.0	2.25	213
-44K	8	22.0	± 10%	75	2.5	30.0	2.50	202
-46J	●	24.0	± 5%	60	2.5	26.0	2.50	202
-47K	9	27.0	± 10%	60	2.5	25.0	2.60	198
-48J	●	27.0	± 5%	60	2.5	25.0	2.60	198
-50J	●	30.0	± 5%	65	2.5	21.0	2.80	191
-51K	10	33.0	± 10%	65	2.5	19.0	3.00	185
-52J	●	33.0	± 5%	65	2.5	19.0	3.00	185

MS90538- SERIES 1537 IRON CORE (LT10K)								
-54J	1	36.0	± 5%	60	2.5	15.5	2.50	202
-56J	2	39.0	± 5%	60	2.5	14.5	2.60	198
-58J	3	43.0	± 5%	60	2.5	13.7	2.70	194
-60J	4	47.0	± 5%	55	2.5	13.0	2.75	193
-62J	5	51.0	± 5%	55	2.5	12.7	2.85	189
-64J	6	56.0	± 5%	55	2.5	12.0	3.00	184
-66J	7	62.0	± 5%	55	2.5	11.5	3.15	180
-68J	8	68.0	± 5%	55	2.5	11.0	3.30	176
-70J	9	75.0	± 5%	55	2.5	10.5	3.70	166
-72J	10	82.0	± 5%	50	2.5	10.3	3.90	162
-74J	11	91.0	± 5%	50	2.5	10.0	4.30	154
-76J	12	100.0	± 5%	50	2.5	9.5	4.50	151
-78J	13	110.0	± 5%	60	0.79	8.9	4.90	144
-80J	14	120.0	± 5%	65	0.79	8.7	5.20	140
-82J	15	130.0	± 5%	65	0.79	8.5	5.45	137
-84J	16	150.0	± 5%	65	0.79	8.0	6.05	130
-86J	17	160.0	± 5%	65	0.79	7.5	6.40	126
-88J	18	180.0	± 5%	65	0.79	7.0	6.75	123
-90J	19	200.0	± 5%	65	0.79	6.5	7.10	120
-92J	20	220.0	± 5%	65	0.79	6.2	7.45	117
-94J	21	240.0	± 5%	65	0.79	5.9	7.80	115

Parts listed above are QPL/MIL qualified

Optional Tolerances: J = 5% H = 3% G = 2% F = 1%

*Complete part # must include series # PLUS the dash #

For surface finish information, refer to www.delevanfinishes.com